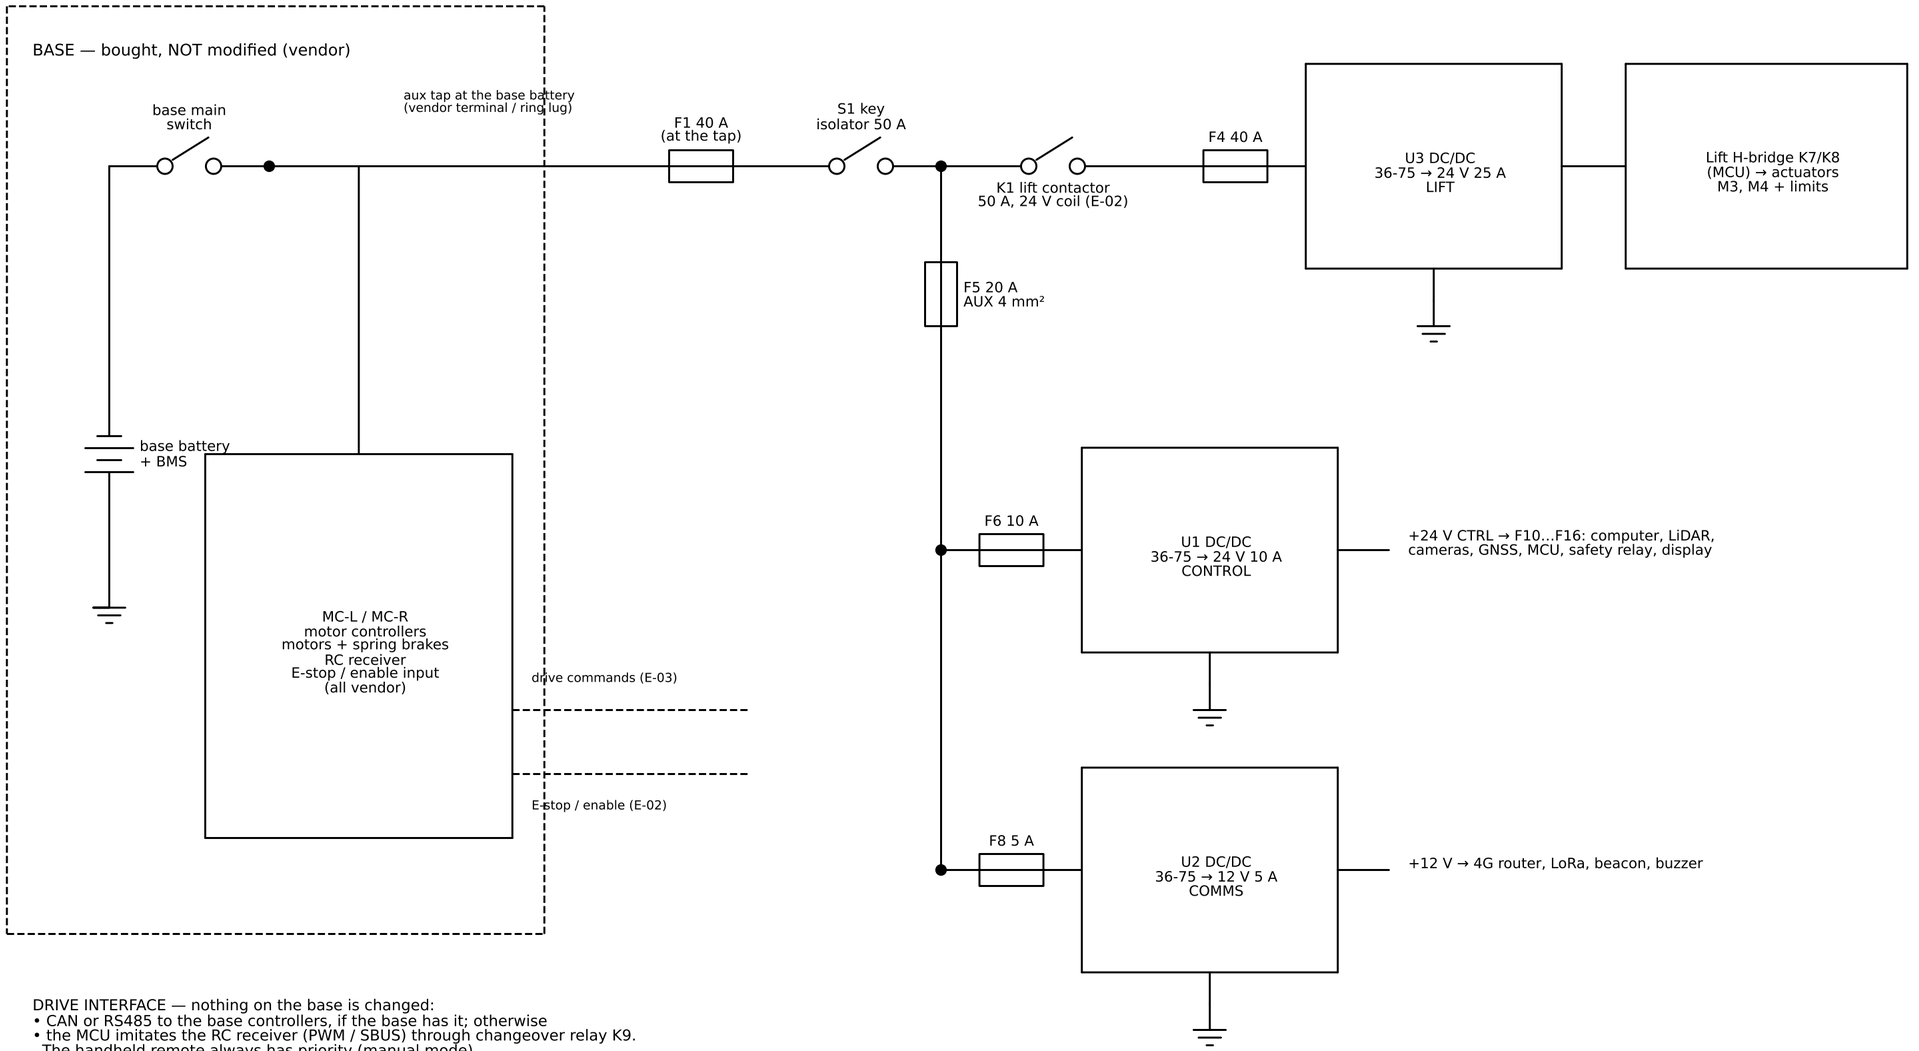

DRIVE INTERFACE — nothing on the base is changed:
- CAN or RS485 to the base controllers, if the base has it; otherwise
- the MCU imitates the RC receiver (PWM / SBUS) through changeover relay K9. The handheld remote always has priority (manual mode).
- The safety relay (E-02) opens the base's own E-stop / enable input.

NOTES
1. Base battery voltage assumed 48 V (check). DC/DCs 36-75 V in; for a 60/72 V base use 40-160 V input types.
2. Our load: ≈ 50-120 W continuous + lift 480 W for ~20 s per swap: small next to the base battery.
3. E-stop: K1 drops (lift stops) and the base's E-stop input opens (motors stop, base brakes clamp).
4. Computer, sensors and radio stay powered after an E-stop so the robot can report.
5. Charging: with the base's own charger and socket (vendor).

BINBOT — autonomous olive bin carrier

POWER — TOP MODULE FED FROM THE BASE

DWG E-01 REV C BP-04 electronics

PRELIMINARY — check against vendor datasheets 2026-10-28