



Upgrade introductions (TF Card)

Steps as following:

1> Download the tools and extract it, and run 'Burn_Card_Maker.exe' tool:

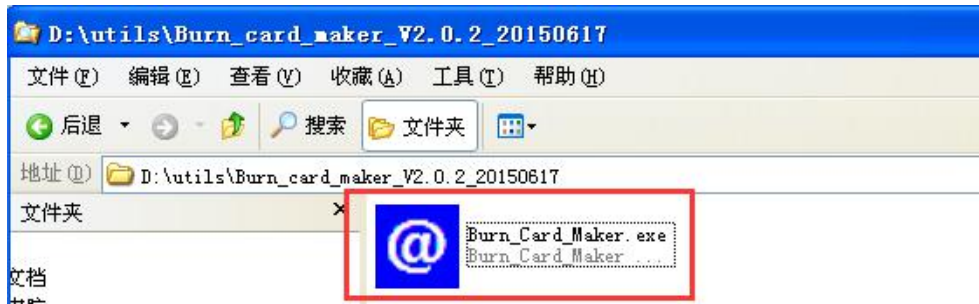

2> Prepare a TF card with a card reader, plug-into your PC, then:

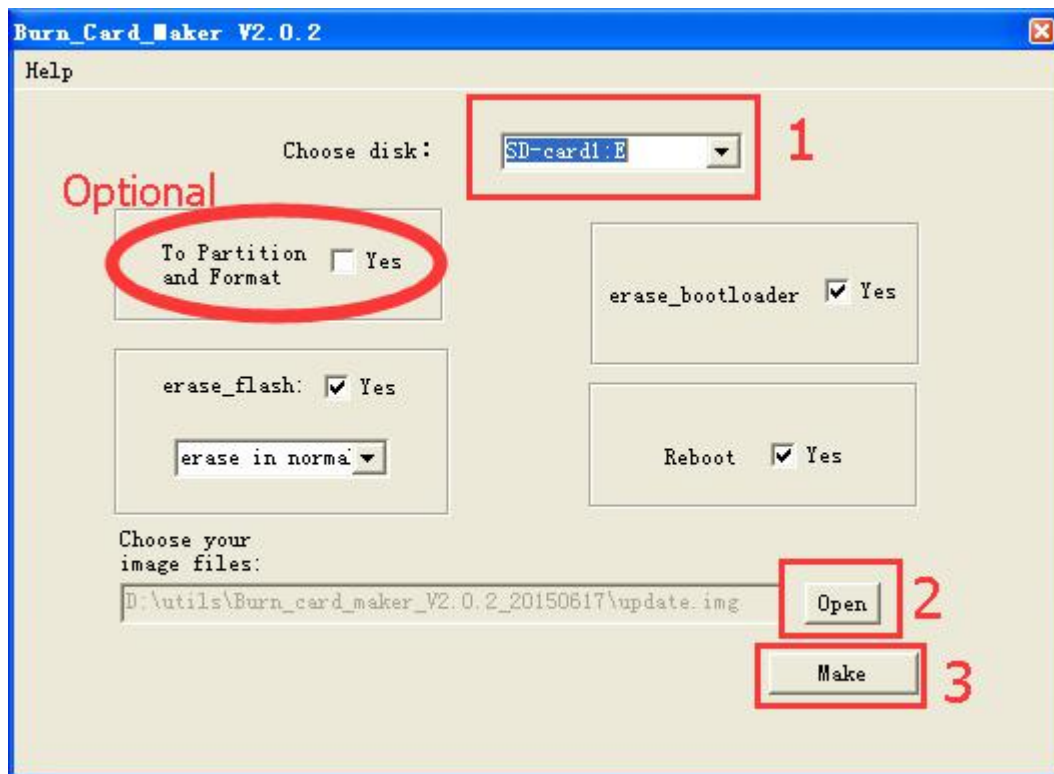

Notice: Optional step is recommended to enable if it's the first time to make the booting card for Vim.


3> When everything is done, click the 'Success' button to quit current operation.

4> Plug-out the TF card from your PC and then plug it into TF Card slot of Vim.

5> Connecting the USB-C & HDMI cables, and power on Vim.

6> Let Vim enter into upgrade mode to complete the upgrading:

- Long press 'Power' key without release
- Short press 'Reset' key and release
- Count 2-3 seconds and release the 'Power' key to enter into upgrade mode

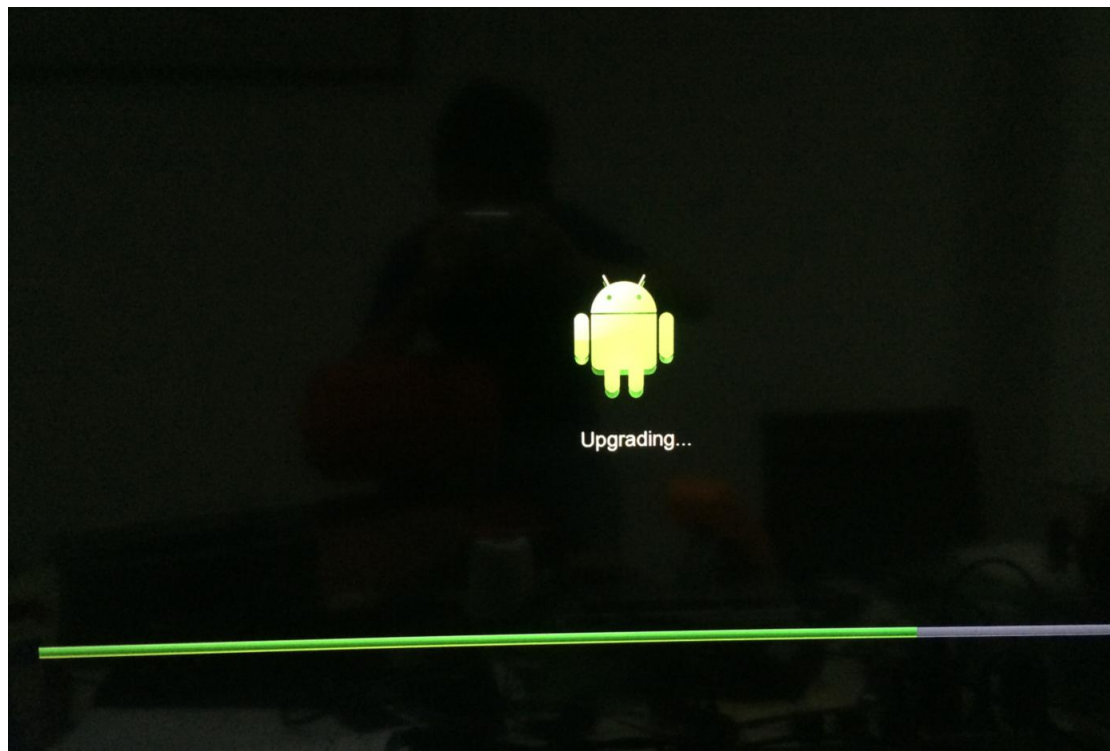

If everything goes fine, the final step would be like this.(Photo from a monitor)

Have Fun!

See also:

1> Upgrade via an USB cable.

2> Other methods to enter into upgrade mode.