

Amplifiers



Equalizer



Splice block



SPLICE




BLOCK


Terminator




Power Block



Taps



TWO PORT EIGHT




FOUR PORT FOURTEEN




EIGHT PORT TWENTY SIX

- CIRCLE DENOTES 2 PORT.
- SQUARE DENOTES 4 PORT.
- HEXAGON DENOTES 8 PORT.
- THE VALUE INSIDE THE TAP, WILL BE DENOTED AFTER THE PORT NAME .


Node

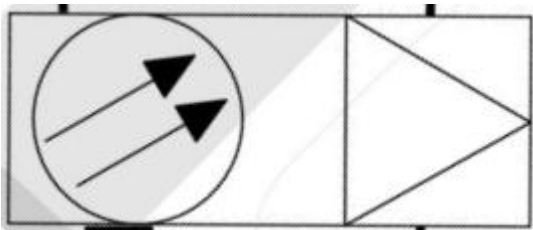


1X4 NODE

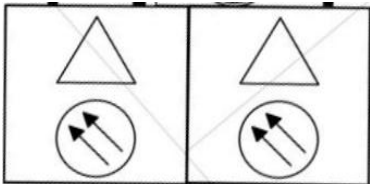

2X2 NODE

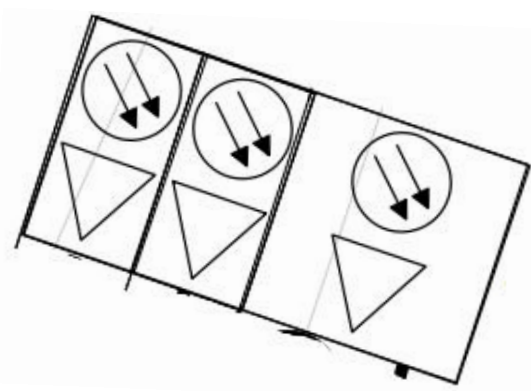

3X3 NODE

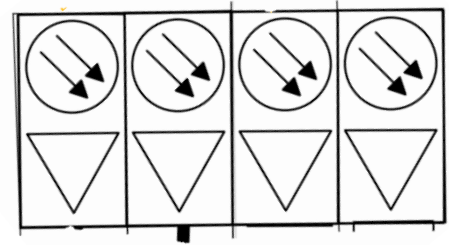


4X4 NODE


Splitter




TWO WAY SPLITTER




THREE WAY SPLITTER



DC8



DC12



DC16



INT DC8



INT DC12



INT 2WAY SPLITTER




External



Internal


Power supply

60V POWER SUPPLY

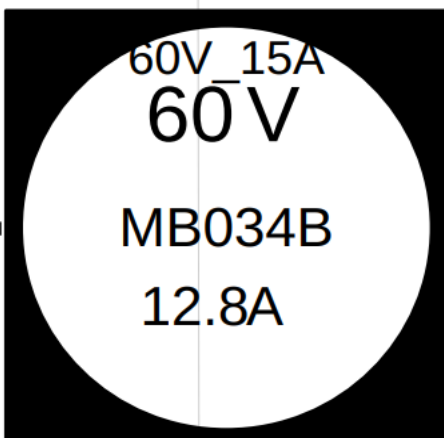


7.84 A

90V POWER SUPPLY

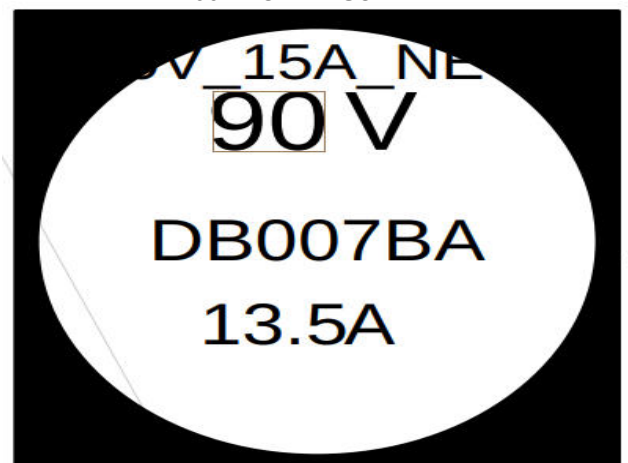


10.77 A


- ❖ Rearrange all yellow Tags

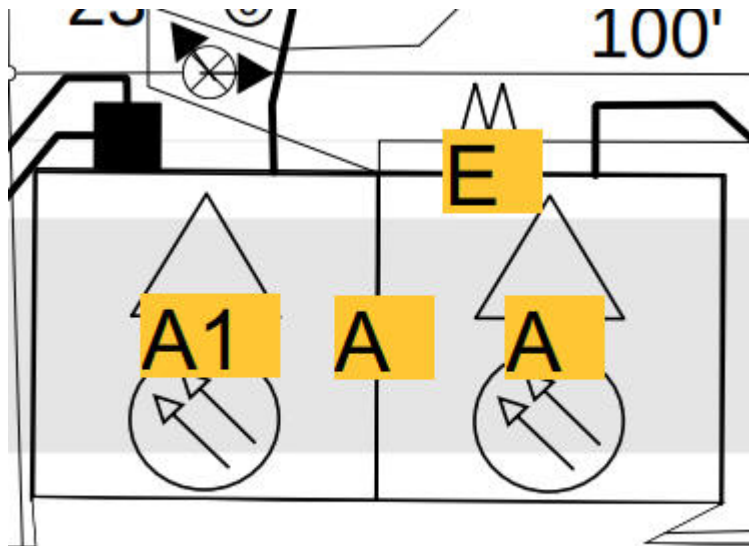


- ❖ Rule :- REMOVE EQUALIZER AND ADD SPLICE BLOCK. { exception – AT THE EOL (End Of Line) NO NEED TO ADD SPLICE BLOCK. ONLY NEED TO REMOVE THE EQUALIZER. }

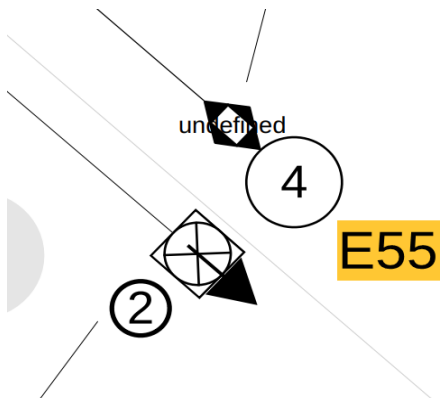


- HAVE EQUALIZER AT EOL

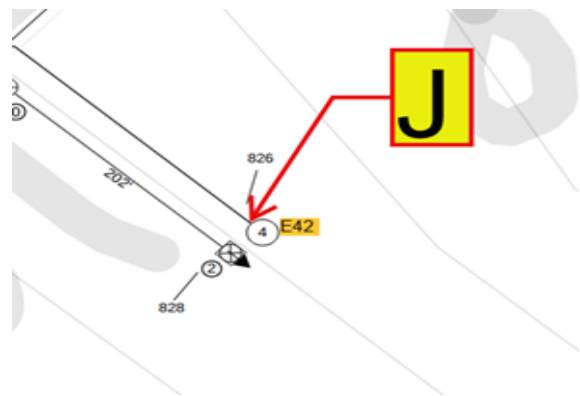

EQUALIZER REMOVED

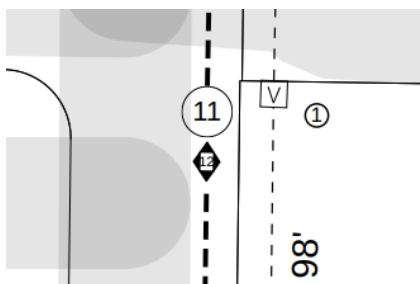

- HAVE EQUALIZER IN B/W LINE

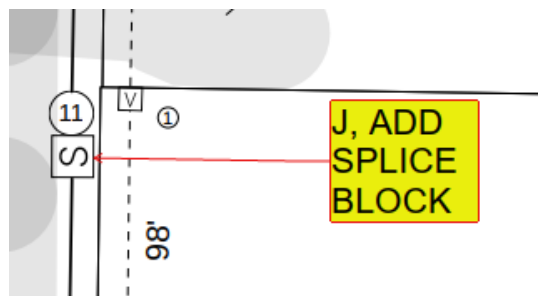

REMOVE EQUALIZER AND ADD
SPLICE BLOCK

Callout :-


When we are removing equalizer - **J**

When we are adding splice block - **ADD SPLICE BLOCK**

❖ Rule :- Upgrade all AMPLIFIERS .

Callout :-

Upgrade amplifier - **A**


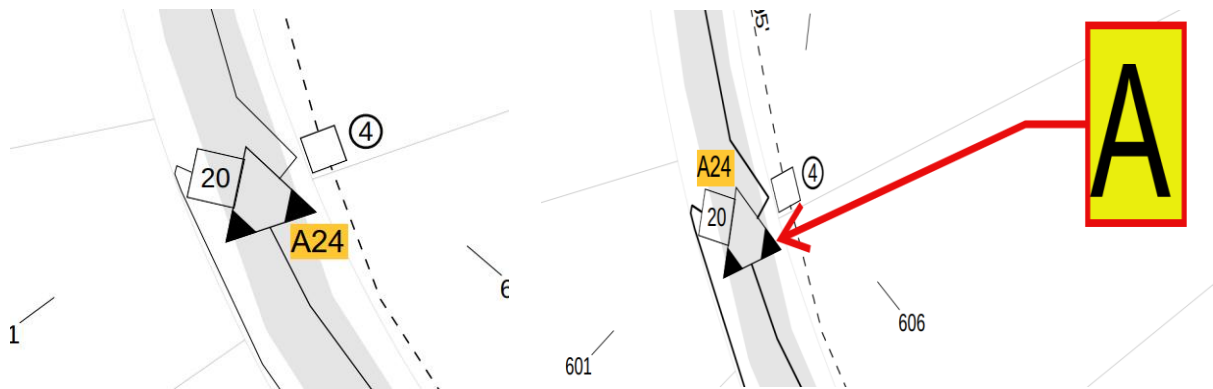


Add **A callout to all the amplifiers in after print.**

❖ **TAP**

Rule :- When the tap value or the shape of the tap changes an **E** callout is needed.

Callout :- **E**

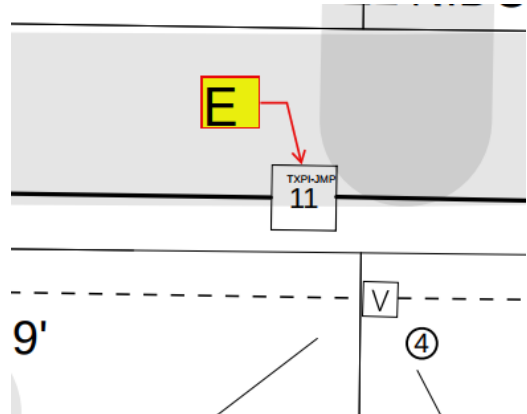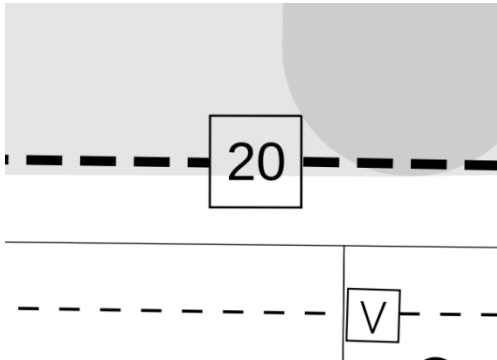



- **TAP** in before print

TAP in after print

❖ Rule :- If there any tap with EQZ - XX .


Callout :- **ADD CE - XX**

(for example , here the callout will be **ADD CE - 03**)

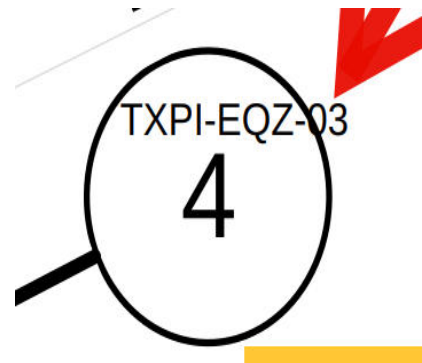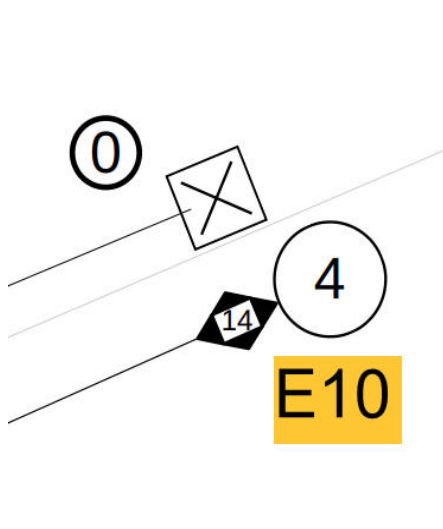

❖ NODE

Rule :- Upgrade node

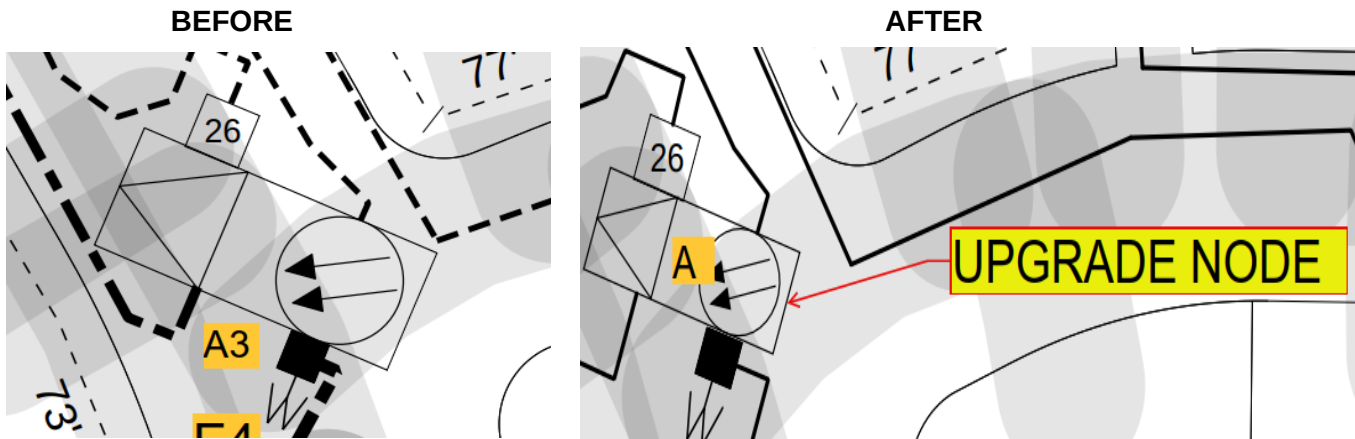

Callout :- **UPGRADE NODE**

CASE 1 - (4X4 Node in before print)

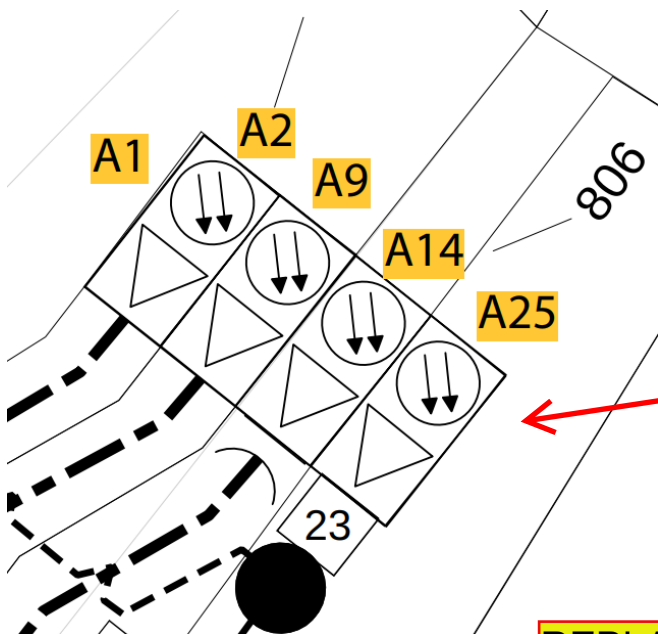


Image here represents existing 4X4 Node , which will be only seen in before print

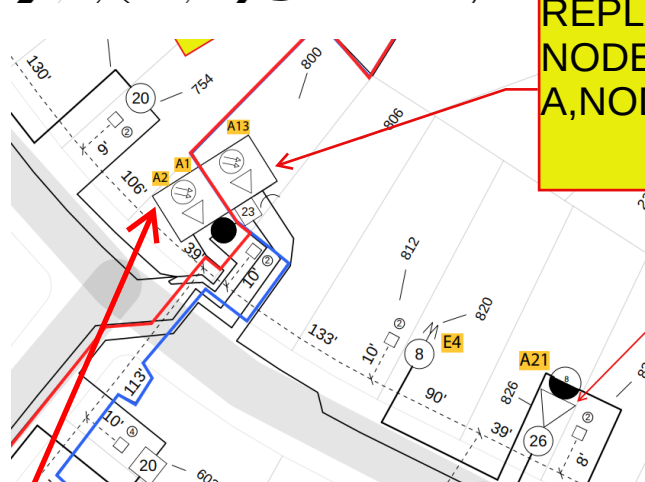


Image here represents 2X2 Node , which will be seen in after print.

REPLACE EXISTING 4X4 (NODE W,NODE X, NODE Y,NODE Z) WITH SEGMENTED 2X2 (NODE A,NODE B) , RESPLICE AS SHOWN

Note : If we have 4X4 Node in the before print & a 2X2 Node in the after print , then this **callout** should be given.

CASE 2 - (3X3 Node in before print)



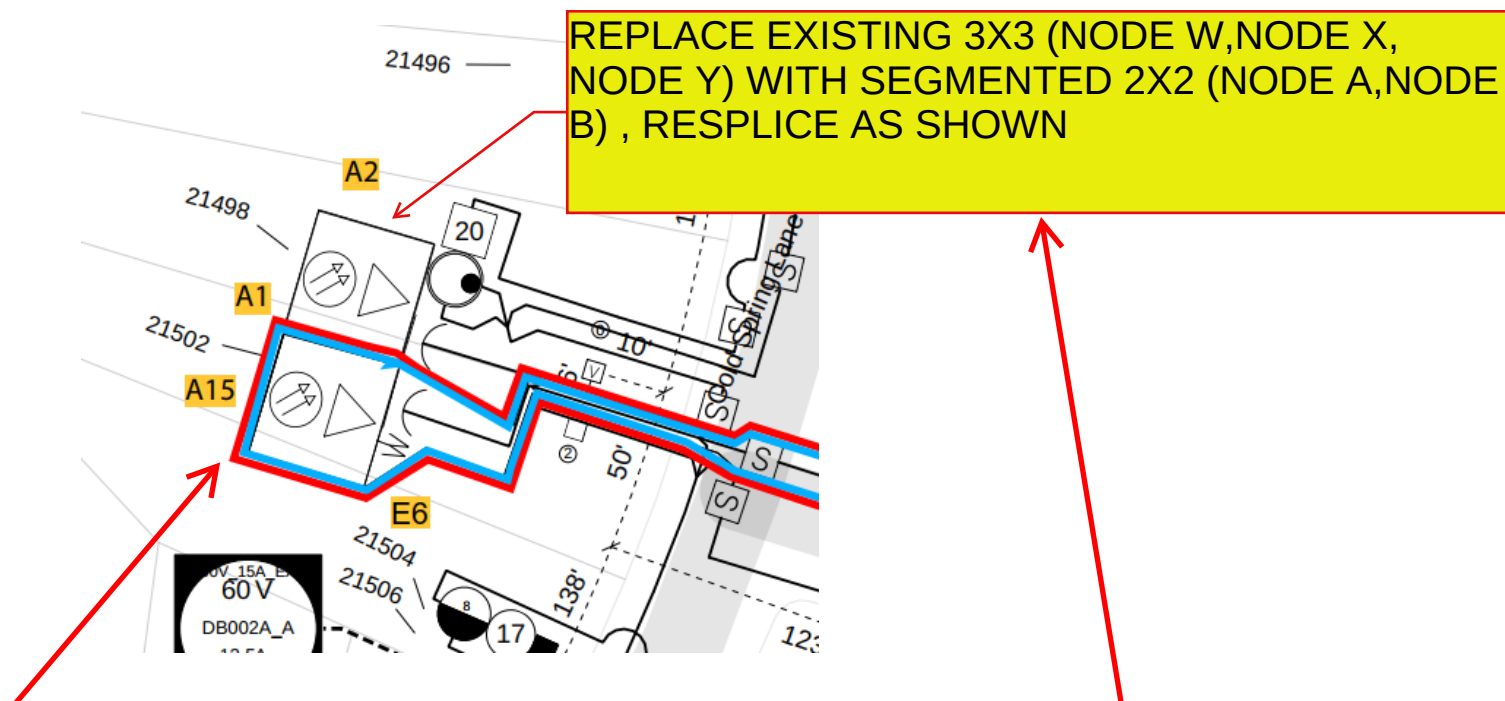


Image here represents 2X2 Node , which will be seen in after print.


Note : If we have 3X3 Node in the before print & a 2X2 Node in the after print , then this **callout** should be given.

CASE 3 - (2X2 Node in before print)

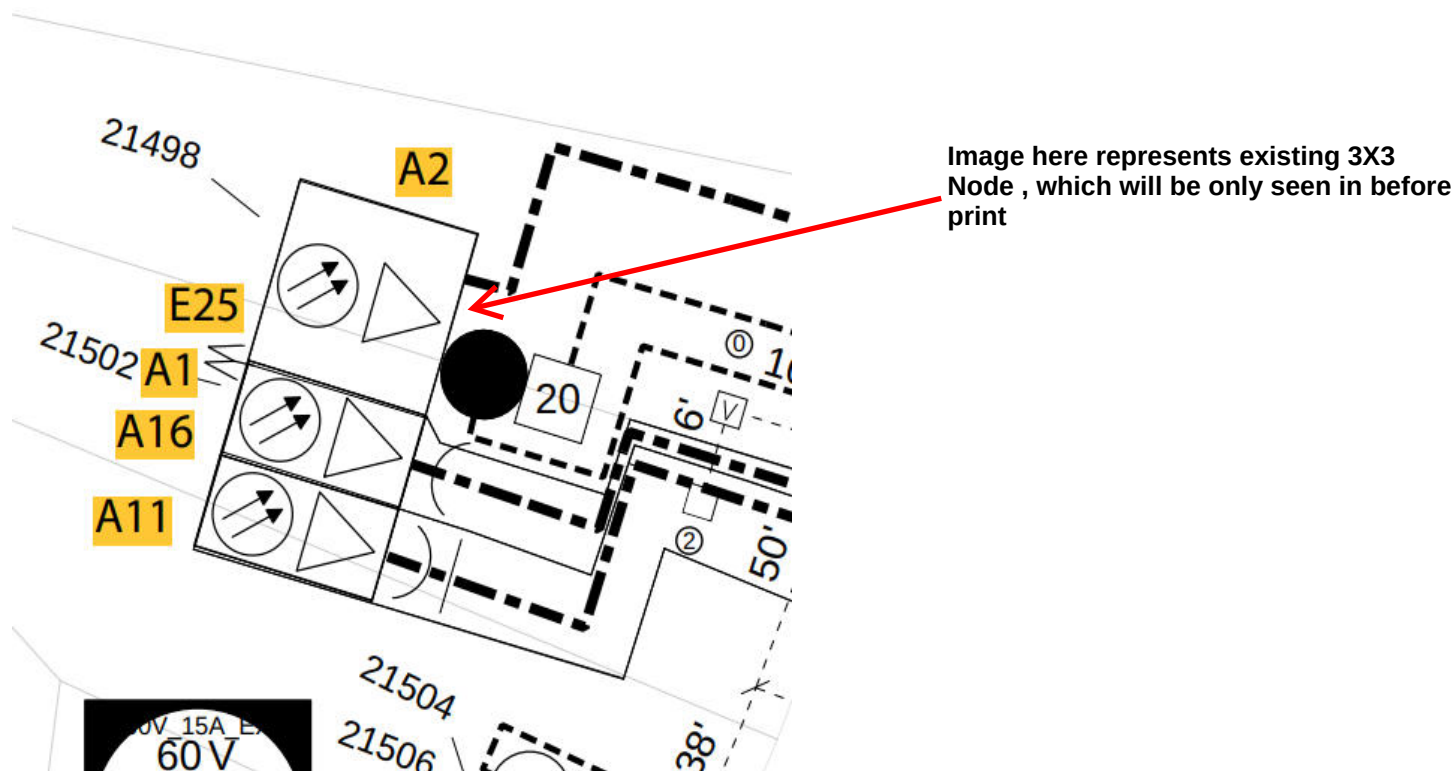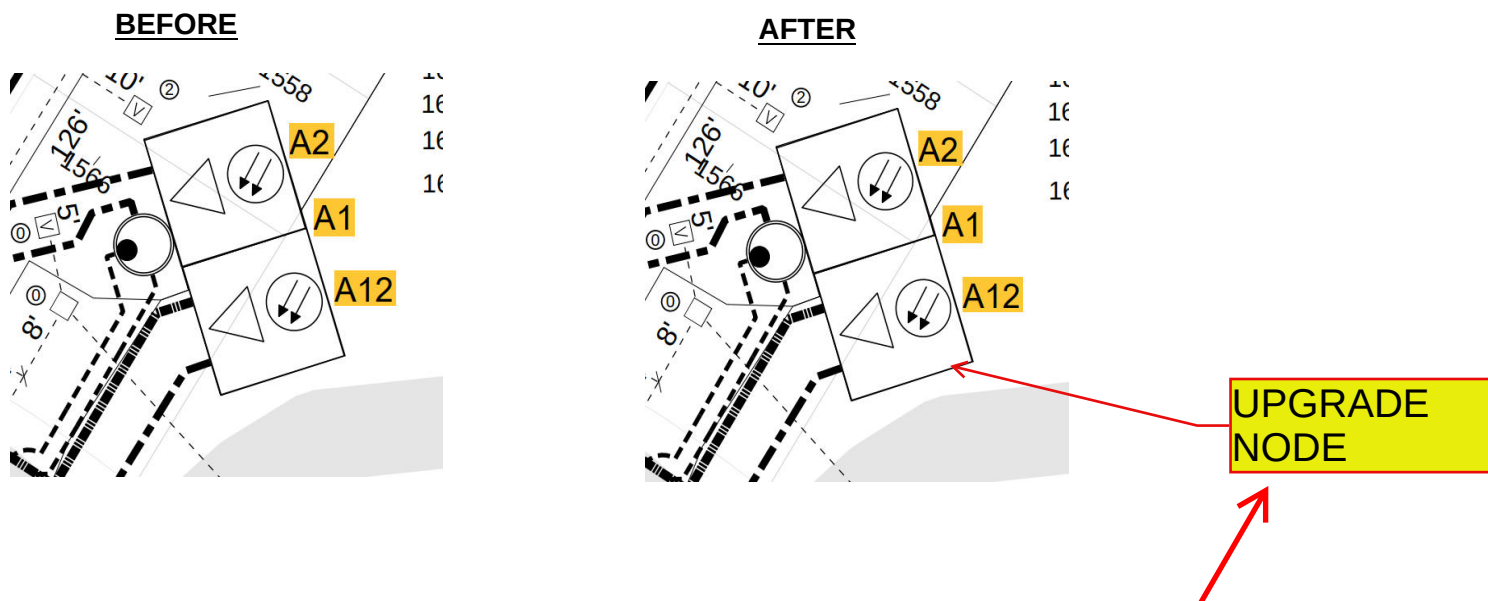


Note : If we have 2X2 Node in the before print & a 2X2 Node in the after print , then this **callout** should be given.

❖ SPLITTER

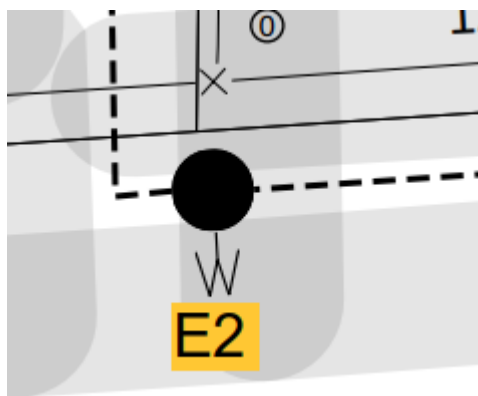


Splitter in before print

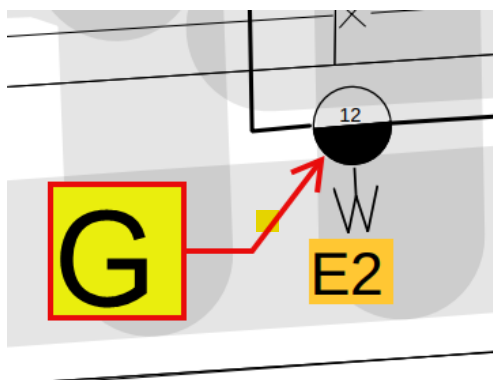

In after print , splitter changes.

If the value inside the splitter changes ,callout is needed.


Callout :- **G**

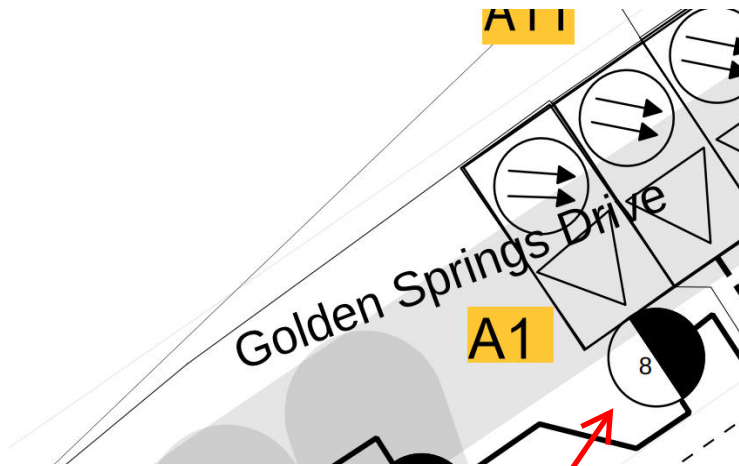

- HAVE SPLITTER


Callout :-

REMOVE SPLITTER

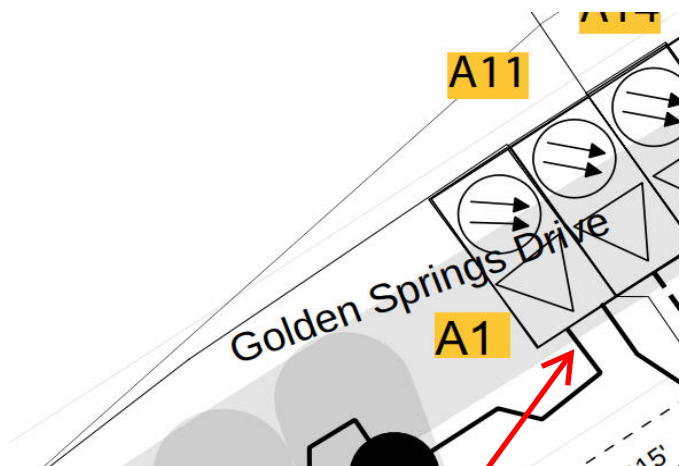

REMOVED SPLITTER

❖ TERMINATOR

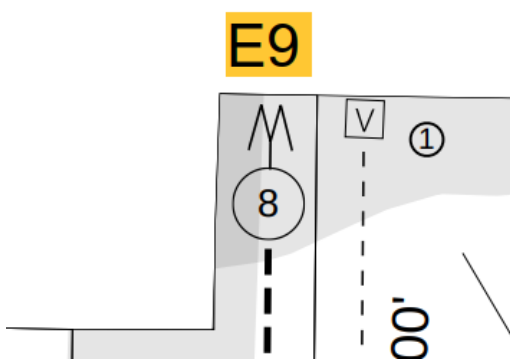

- HAVE TERMINATOR


Callout :-

When we add terminator -

ADD TERM



When we remove terminator -

REMOVE TERM

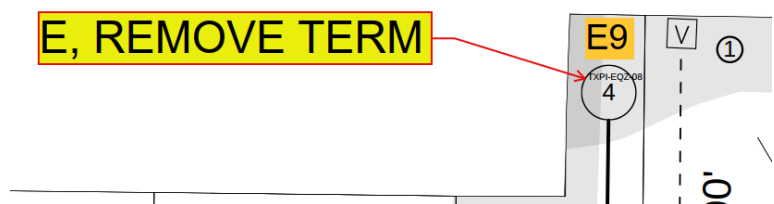

TAP CHANGED AND TERMINATOR REMOVED

❖ BOOSTER

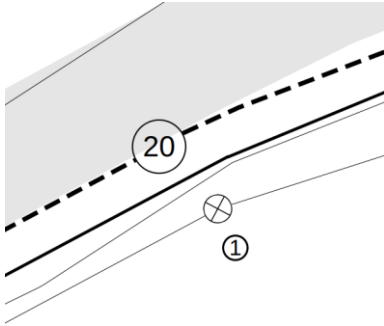


- No booster in before print.

Booster added in after print.

Callout :- **H**

❖ POWER SUPPLY

Rule :- When the voltage changes it needs to be upgraded.

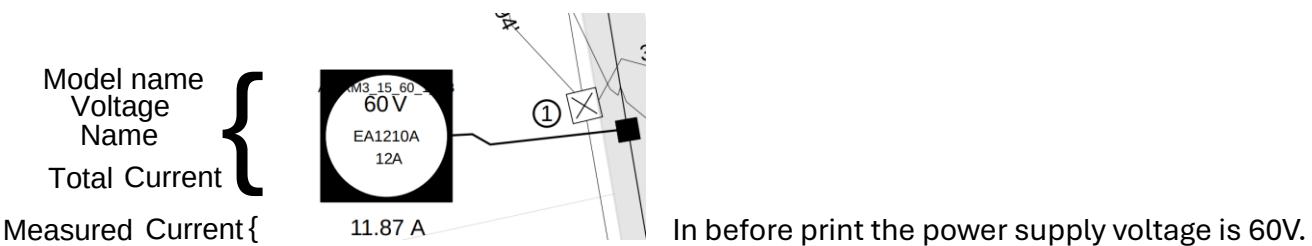


In after print the power supply voltage is changes to 90V.


Callout :- **UPGRADE POWER SUPPLY**

If the measured current is greater than the 80% of the total current , then callout
POWER SUPPLY OVER 80% - PLEASE VERIFY CURRENT DRAW

❖ AMPLIFIERS

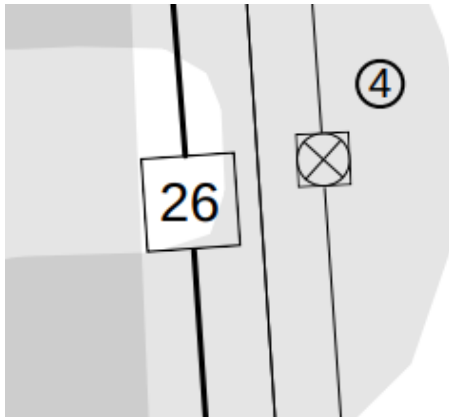


In before print there is no line extender.

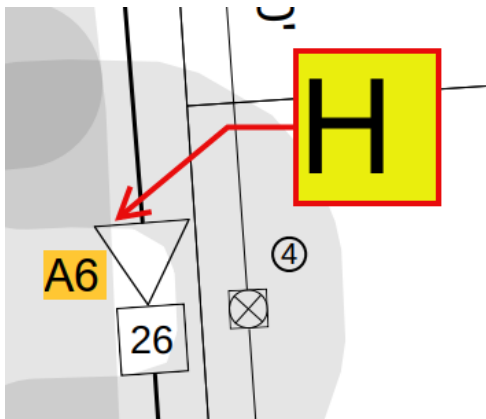


In after print , added a **LINE EXTENDER**.

Callout :- **H**

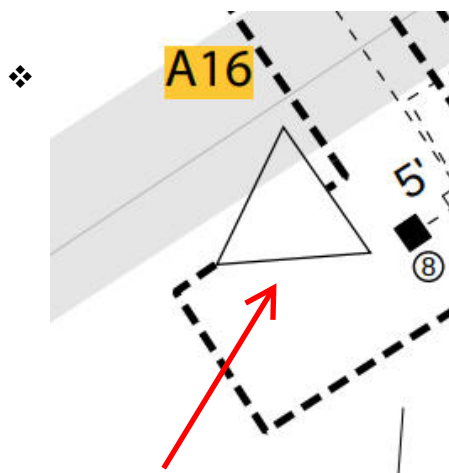



- HAVE LINE EXTENDER

Callout :- **B**

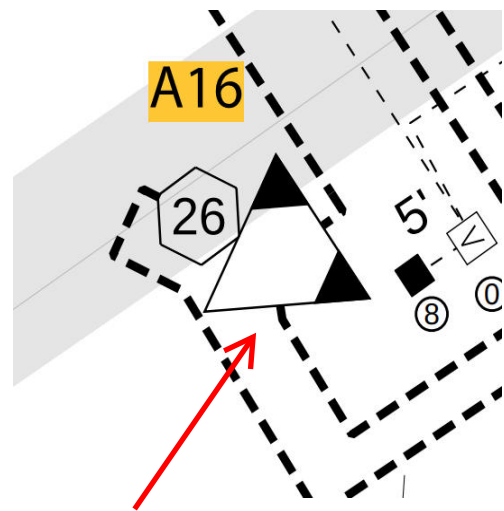

SWAP WITH AMPLIFIER

❖ INTERNAL SPLITTERS

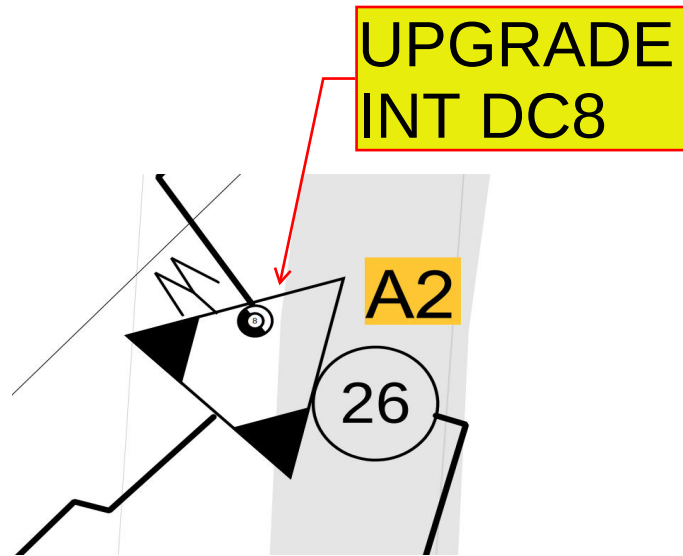
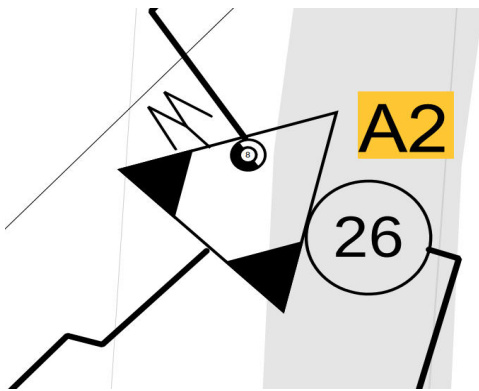


- All internal splitters needs to be upgraded in the after print.

Callout :- **UPGRADE INT XXXX**

Here the internal splitter is DC8 , then the callout becomes : **UPGRADE INT DC8**

❖ POWER BLOCK

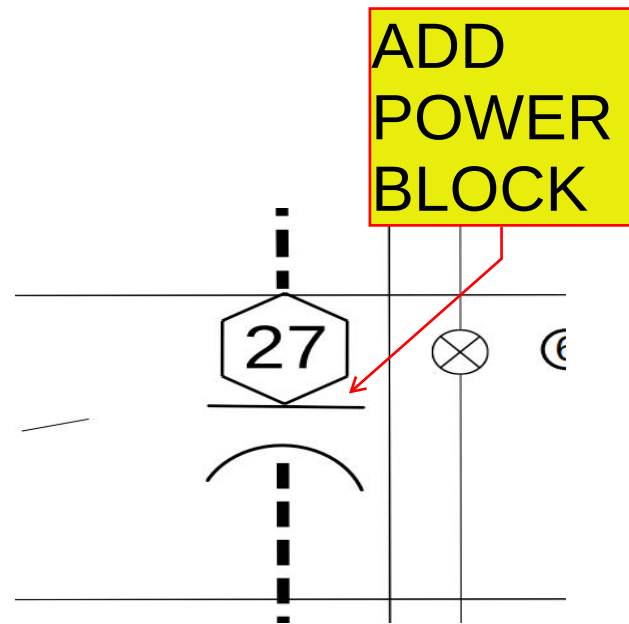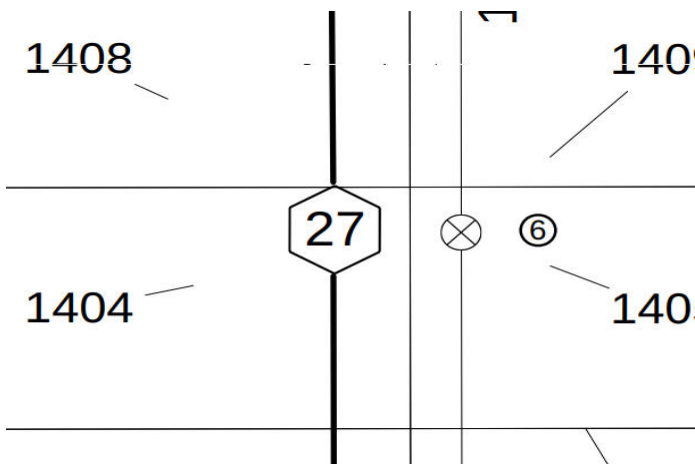

- BEFORE

AFTER

- No powerblock

Added a power block

Callout :-

When we add powerblock

ADD POWER BLOCK

When we remove power block

REMOVE POWER BLOCK