


# Attach the thumb

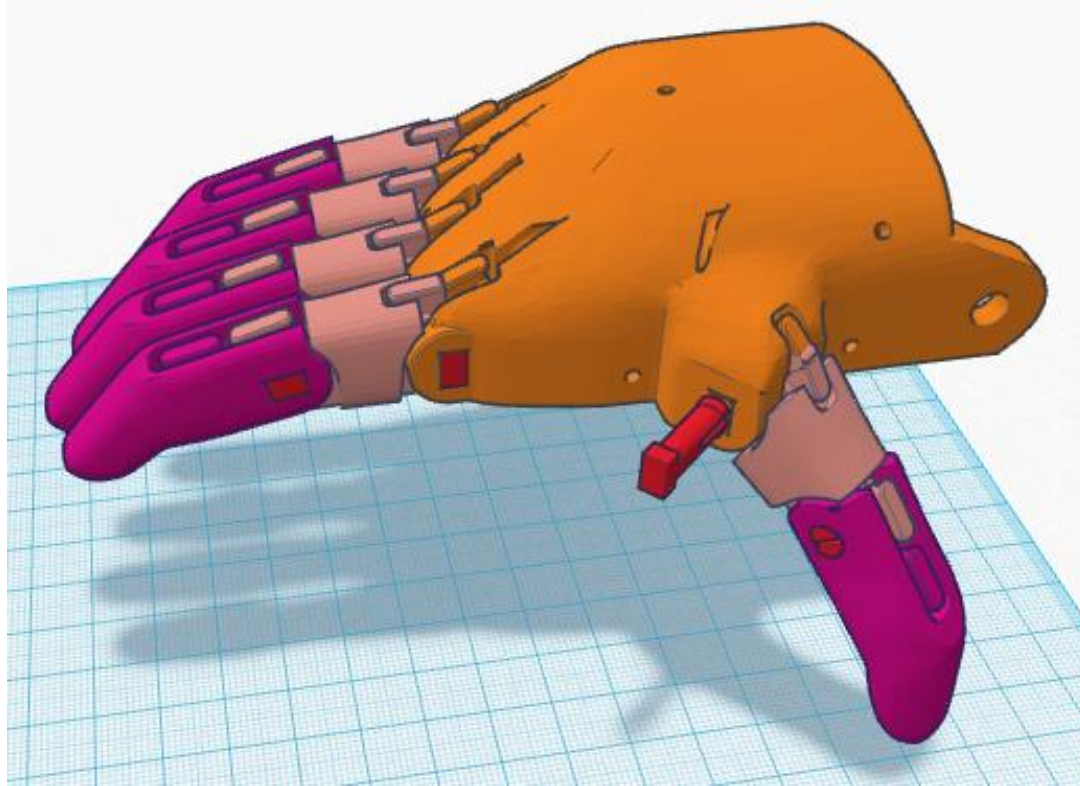

insert the thumb into its joint slot then push the thumb knuckle pin in fully. This can usually be done using just the pliers.

Make sure the thumb moves freely in the knuckle joint. If it can't be made to swing freely by working is to and fro you'll need to remove the thumb, file the curved surface of the pin using a small flat file then reattach.