


Assemble the thumb



With the rectangular hole on the top align the holes in the thumb tip and thumb proximal phalanges (the wide one).

Hold the thumb tip pin tightly using pliers and push into the hole. Work the joint to and fro till it moves freely.

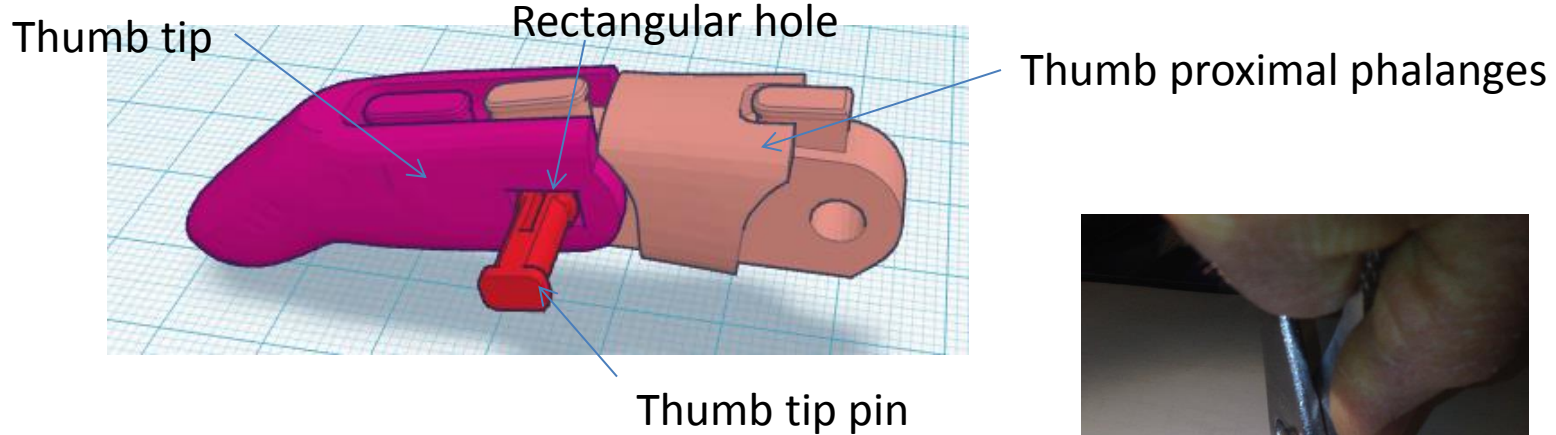