


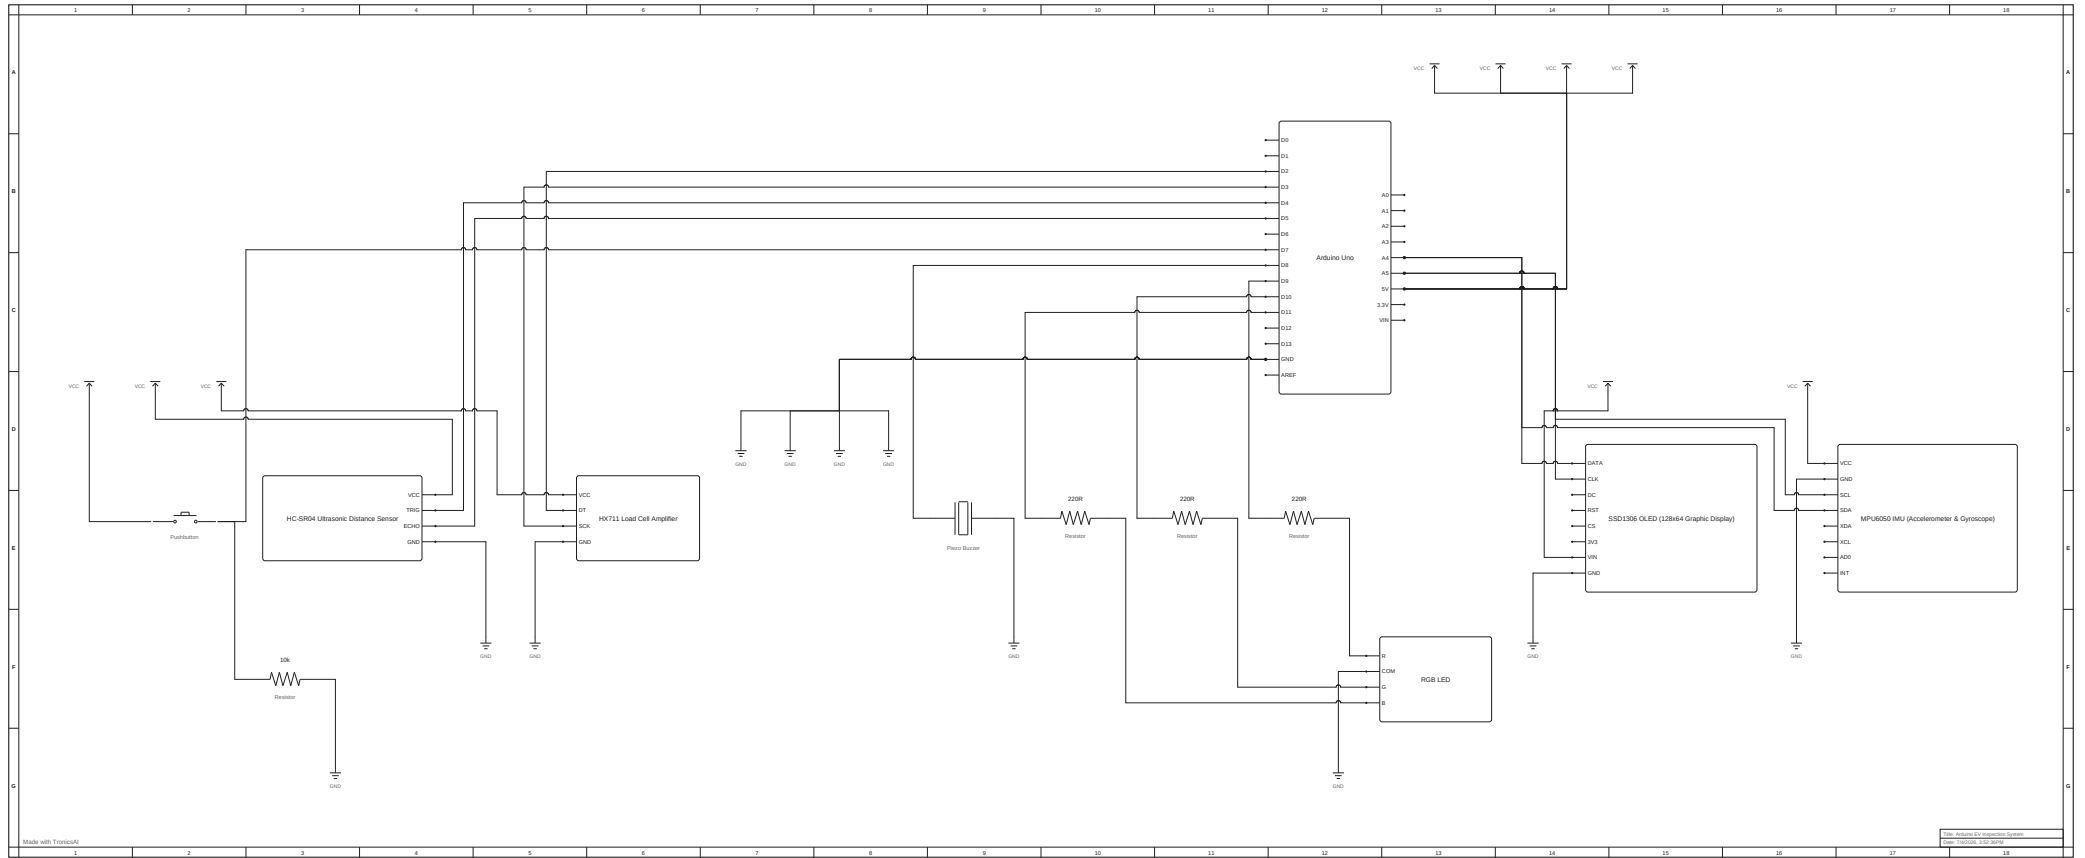

Arduino EV Inspection System — Component List

#	Component
1	Arduino Uno
2	HX711 Load Cell Amplifier
3	MPU6050 IMU (Accelerometer & Gyroscope)
4	HC-SR04 Ultrasonic Distance Sensor
5	SSD1306 OLED (128x64 Graphic Display)
6	RGB LED
7	Piezo Buzzer
8	Pushbutton
9	Resistor
10	Resistor
11	Resistor
12	Resistor

Connections

From	To
Arduino Uno — 5V	HX711 Load Cell Amplifier — VCC
Arduino Uno — GND	HX711 Load Cell Amplifier — GND
Arduino Uno — D2	HX711 Load Cell Amplifier — DT
Arduino Uno — D3	HX711 Load Cell Amplifier — SCK
Arduino Uno — 5V	MPU6050 IMU (Accelerometer & Gyroscope) — VCC
Arduino Uno — GND	MPU6050 IMU (Accelerometer & Gyroscope) — GND
Arduino Uno — A5	MPU6050 IMU (Accelerometer & Gyroscope) — SCL

From	To
Arduino Uno — A4	MPU6050 IMU (Accelerometer & Gyroscope) — SDA
Arduino Uno — 5V	HC-SR04 Ultrasonic Distance Sensor — VCC
Arduino Uno — GND	HC-SR04 Ultrasonic Distance Sensor — GND
Arduino Uno — D4	HC-SR04 Ultrasonic Distance Sensor — TRIG
Arduino Uno — D5	HC-SR04 Ultrasonic Distance Sensor — ECHO
Arduino Uno — 5V	SSD1306 OLED (128x64 Graphic Display) — VIN
Arduino Uno — GND	SSD1306 OLED (128x64 Graphic Display) — GND
Arduino Uno — A4	SSD1306 OLED (128x64 Graphic Display) — DATA
Arduino Uno — A5	SSD1306 OLED (128x64 Graphic Display) — CLK
Arduino Uno — D9	Resistor — 1
Resistor — 2	RGB LED — R
Arduino Uno — D10	Resistor — 1
Resistor — 2	RGB LED — G
Arduino Uno — D11	Resistor — 1
Resistor — 2	RGB LED — B
Arduino Uno — GND	RGB LED — COM
Arduino Uno — D8	Piezo Buzzer — 1
Arduino Uno — GND	Piezo Buzzer — 2
Arduino Uno — 5V	Pushbutton — 1.l
Arduino Uno — D7	Pushbutton — 2.l
Pushbutton — 2.r	Resistor — 1
Resistor — 2	Arduino Uno — GND