

A Battery input (2S LiPo, 6.0–8.4 V)

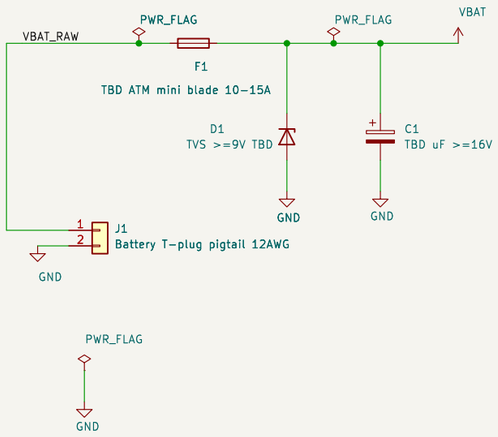


ESC power does NOT pass through this board:
battery –> ESC on its own 12 AWG leads.
J1/F1 carry only the board loads
(about 7.3 A worst case at 6.4 V).

B ESC signals and servo

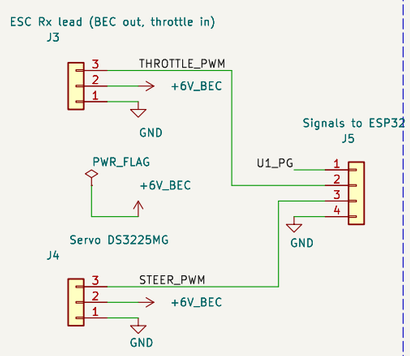

ESC: up to 20 A motor current (THW–1060: 60 A cont.)
from the battery on its own 12 AWG leads, OFF–BOARD.
Only its 3–wire receiver lead lands here (J3).
J5 to ESP32: 1 U1_PG (GPIO TBD), 2 THROTTLE_PWM
(GPIO5), 3 STEER_PWM (GPIO4), 4 GND. 3.3 V logic.


C Compute 5 V (+5V_CPU: Pi 5 + ESP32 only)

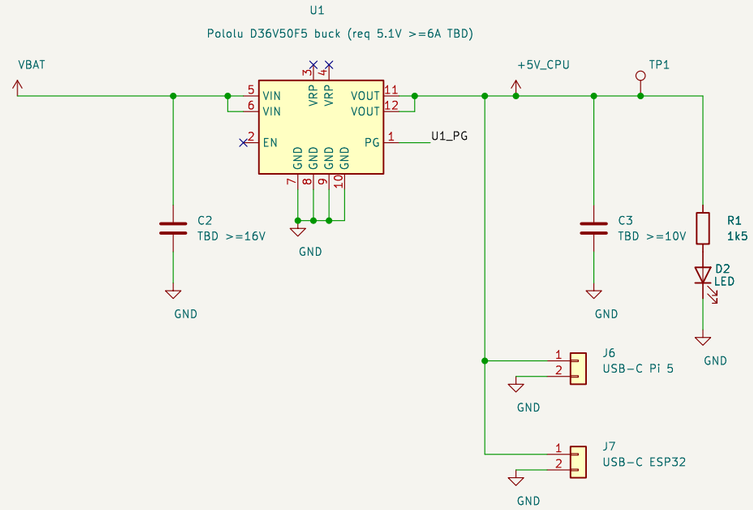


Notes

1. Battery: 2S LiPo, 6.0–8.4 V (ESC LVC cuts at 6.0 V).
   T–plug pigtail (12 AWG bare ends) soldered to J1 pads;
   pad size TBD (footprint is the 2.5 mm2 placeholder).
2. ESC is powered OFF–BOARD: battery –> ESC on its own
   12 AWG leads (up to 20 A). This board carries only its
   own loads (about 7.3 A worst case; 7.8 A at 6.0 V), so F1 is sized for
   that, not for the motor.
3. F1 is the single replaceable main fuse (Mini/ATM blade
   in a PCB holder, type pending confirmation) protecting
   compute and both sensor rails; no branch fuses.
   Trade–off: a sensor–branch short opens F1 and drops
   compute too (U1/U2 limit their own output current).
   All protection values TBD.
4. Single common GND; star point at J1 in layout.
5. +6V_BEC is ESC–supplied (servo only), never joined
   to a 5 V rail.
6. Signals are 3.3 V logic or lower.
7. U1 Pololu D36V50F5: all 12 pins drawn (2x VIN, 2x VOUT,
   4x GND, 2x VRP, EN, PG). VRP unused (sensor buck fed
   from VBAT). EN left unconnected: the module's
   internal pull–up keeps it on (ESP32 EN control
   archived). PG: open–drain, to ESP32 via J5 (ESP32
   INPUT_PULLUP, non–strapping GPIO TBD).
8. U2 EN per module datasheet (TBD); U2 footprint TBD.
9. Rails are project power symbols (rc_power lib):
   pin name = Value = net name.
10. PWR_FLAG = ERC marker only (no part, not on the PCB):
    tells ERC where power enters VBAT_RAW, GND, VBAT,
    LDO_IN, +6V_BEC.
11. Net classes (kicad_pro): HighCurrent = *VBAT*, GND;
    Power5A = +5V_CPU;
    Power3A = +5V_SENS, *+6V_BEC.
12. J6/J7: 2–wire USB–C pigtails (20 AWG, 30 cm, about
    0.10 V drop at 5 A; trim to 10–15 cm) into the Pi 5
    and ESP32 USB–C inputs, keeping their own input
    protection. Pi 5 gets no USB–PD 5 A offer (USB ports
    limited to 600 mA unless set in config.txt).
13. Spec: power_board_plan.md; meeting summary:
    design_overview.md; parts: bom.md; layout/fab:
    fab_handoff.md. TBD values are unconfirmed.

D Sensor 5 V (+5V_SENS: heavy sensors + 3.3 V LDO)

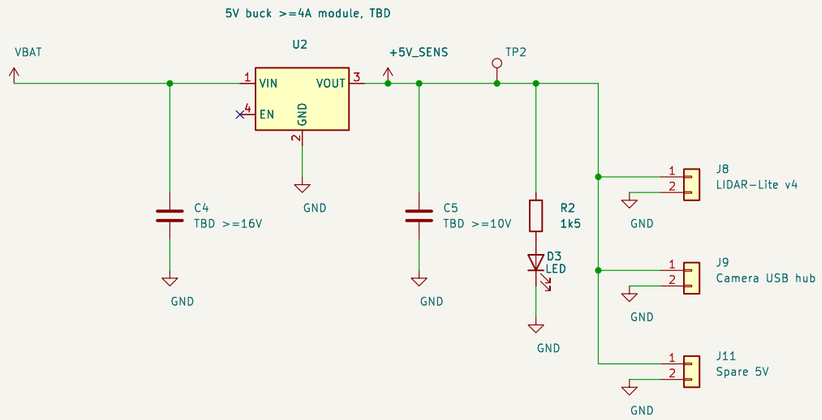

E Sensor 3.3 V (+3V3_SENS: LDO from +5V_SENS)

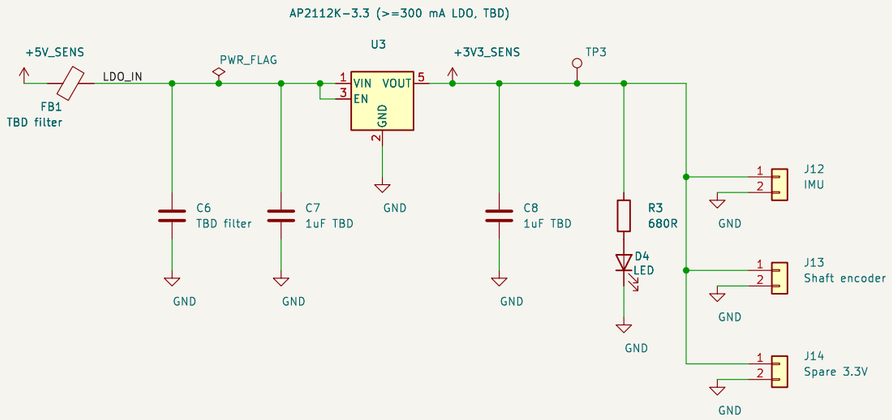

ESP32 3V3 pin must not power these sensors (ESP32 powers nothing).

H1 H2 H3 H4
MountingHole_M3 MountingHole_M3 MountingHole_M3 MountingHole_M3

Meeting summary: docs/schematics/design_overview.md; project KiCad version 10.0
Spec: docs/schematics/power_board_plan.md
Draft for review, values marked TBD are unconfirmed
gvo27/racecar

Sheet: /
File: rc_power_board.kicad_sch

Title: RC Car Power Distribution Board

Size: A3	Date: 2026–10–30	**Rev: A (draft)**
KiCad E.D.A. kicad–cli 7.0.11+dfsg–1build4		Id: 1/1