




Button 1 / PTT: GPIO22, LED GPIO32

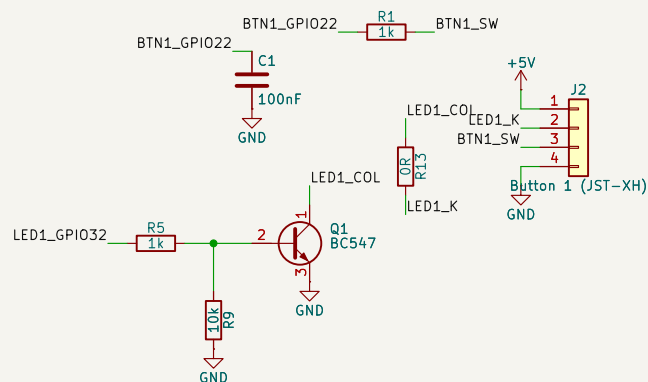





Button 2: GPIO20, LED GPIO33

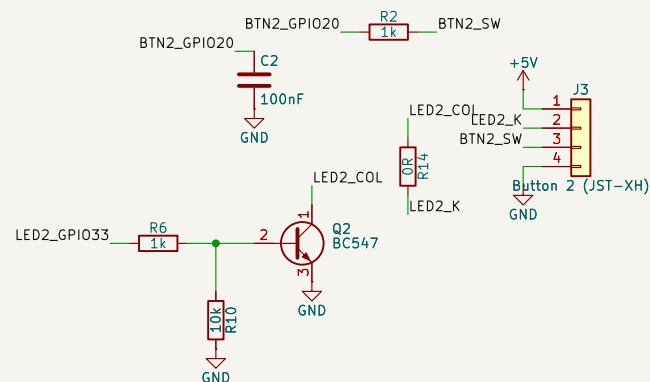

Button 3: GPIO21, LED GPIO4

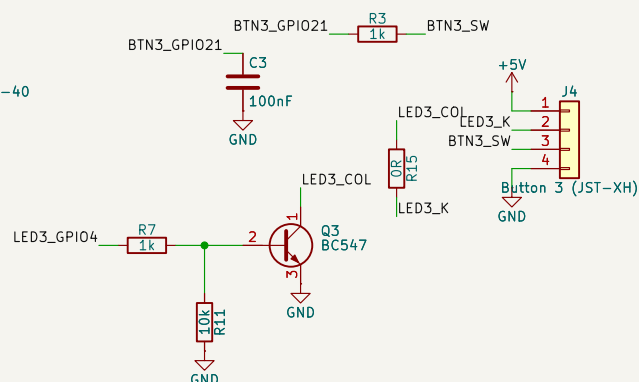

Button 4: GPIO23, LED GPIO5

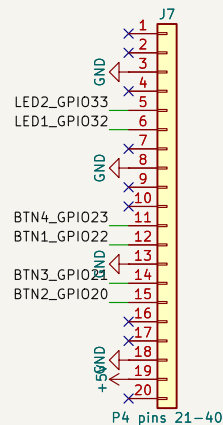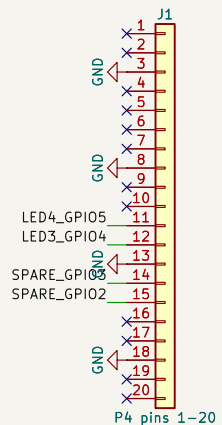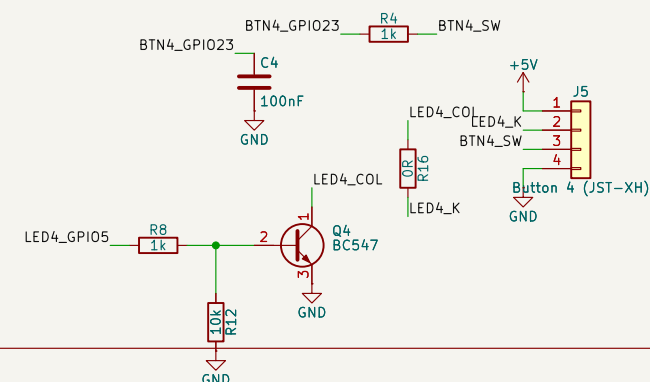

Base board for the WaveShare ESP32-P4-ETH / -POE-ETH: the module plugs in from above (header P1, Pico layout, rows 17.78 mm apart). J1 = P4 pins 1-20, J7 = P4 pins 21-40. +5V = V5SYS (P4 pin 39). The PoE module sits on top of the P4. All parts through-hole. ESPHome: buttons GPIO22/20/21/23 INPUT_PULLUP, inverted (pressed = low); LEDs GPIO32/33/4/5 via LEDC (PWM). Button connectors (JST-XH): 1 = LED+ (+5V), 2 = LED-, 3 = switch (NO), 4 = GND (switch C). R13-R16: fit OR, or a resistor once the ring current at 5 V is measured.

Sheet: /
File: intercom-carrier.kicad_sch

Title: Intercom carrier

Size: A4 Date: 2026-10-06
KiCad E.D.A. 10.0.6

Rev: A
Id: 1/1