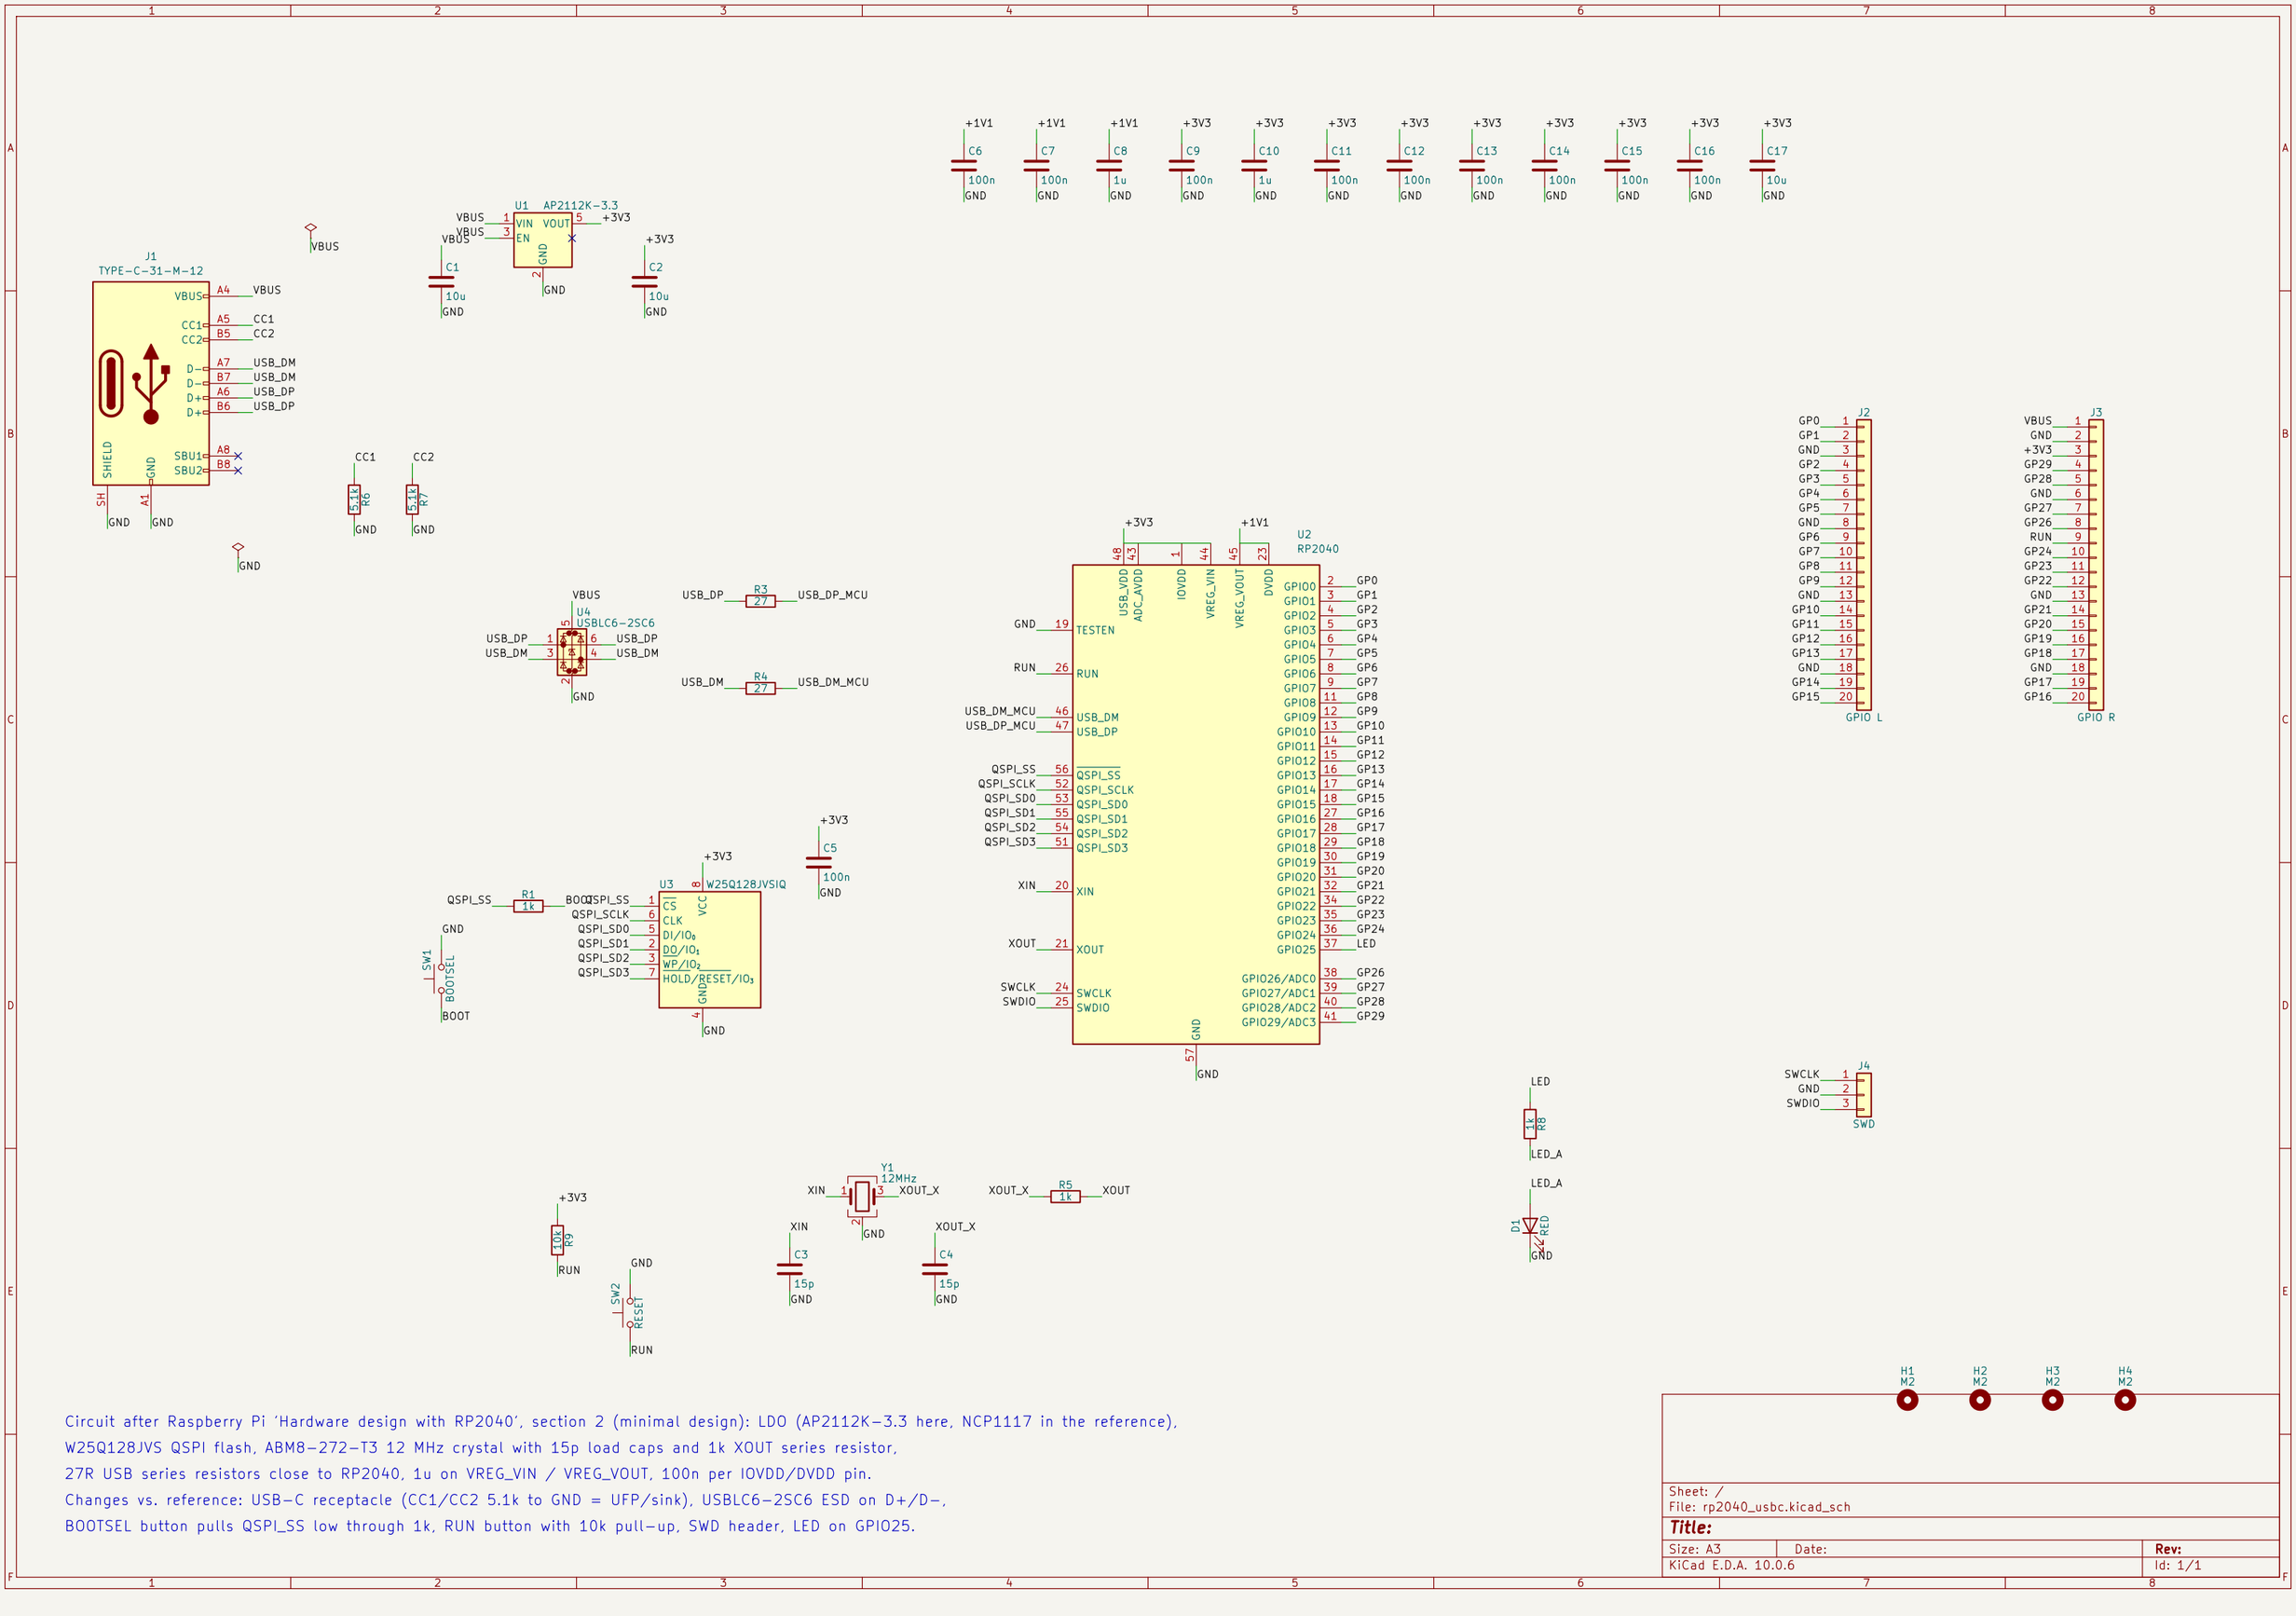


Circuit after Raspberry Pi 'Hardware design with RP2040', section 2 (minimal design): LDO (AP2112K-3.3 here, NCP1117 in the reference), W25Q128JVS QSPI flash, ABM8-272-T3 12 MHz crystal with 15p load caps and 1k XOUT series resistor, 27R USB series resistors close to RP2040, 1u on VREG_VIN / VREG_VOUT, 100n per IOVDD/DVDD pin. Changes vs. reference: USB-C receptacle (CC1/CC2 5.1k to GND = UFP/sink), USBLC6-2SC6 ESD on D+/D-, BOOTSEL button pulls QSPI_SS low through 1k, RUN button with 10k pull-up, SWD header, LED on GPIO25.

Sheet: /
File: rp2040_usbc.kicad_sch

Title:

Size: A3	Date:	**Rev:**
KiCad E.D.A. 10.0.6		Id: 1/1