

# Automated batch evaluation of diffusion coefficients from Asymmetrical Flow Field-Flow Fractionation data via void peak determination I – Theory and measurement uncertainties (Supplementary information)

Benedikt Häusele, Maxim Benjamin Gindele, Helmut Cölfen

## Abstract

Asymmetrical field-flow fractionation is a versatile chromatographic method of fractionation. In combination it is used for size-based separation of colloids, biomolecules and polymers. Although used often as pure separation method, a well-elaborated theory is available that allows precise quantification of the analysis results. A conversion from the time domain to the domain of hydrodynamic radius yields size distribution directly from the fractogram. However, up to now, this is an error-prone procedure requiring some effort as the fractograms have to be pre-processed manually to gain all information required for the conversion. In this work, we present a software-based evaluation work flow which circumvents these pitfalls allowing to calculate reliable distributions. Providing a small graphical user interface minimizes the manual effort of evaluation which turns out to be useful especially for method development, extensive parameter studies and multi-detection methods.

## Determination of geometrical channel Volume $V^{\text{geo}}$

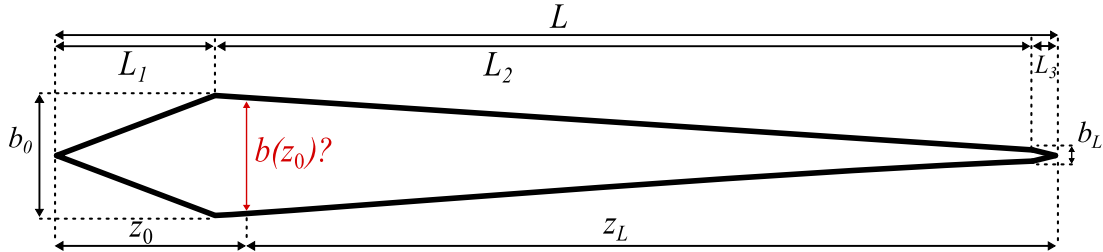


Fig. S.1: Channel dimensions. The width  $b(z_L)$  depends on the focus position and is not accessible via bare channel data.

AF4 channel have a trapezoidal shape with measures indicated in fig. S.1. For all further considerations, the channel plane is split into three sections (1,2,3) with their corresponding lengths  $L_1, L_2, L_3$ . To simplify the further calculations, they are subsumed as in the following:

$$L = L_1 + L_2 + L_3 = L_{12} + L_3 \quad (\text{S.1})$$

As the sample is focussed at a certain channel position on the beginning, this has to be considered. The relative focus position  $z_0$  is related to the other focus-related magnitudes by

$$z_0 = z_0 L = L - z_L \quad (\text{S.2})$$



Fig. S.2: Channel dimensions as a set of 3 pairs of straight lines

The channel height difference  $b_{\Delta}$  on the section 2 is

$$b_{\Delta} = b_0 - b_L \geq 0 \quad (\text{S.3})$$

Volume calculation may be conducted for the trapezoidal by simple decomposition of the channel plane into elementary geometrical objects. However, a concise analytical approach is more appropriate as the result can be displayed as a function of  $z_0$ . In addition the corresponding  $b(z_0)$  is not known initially. Similar derivations have already been conducted with the approximation of dividing the shape into two sections.<sup>[1-4]</sup> The approach may be useful for further hydrodynamic considerations as for example, the elution flow  $V_e(x)$  in AF4 is a position-dependent size. For the trapezoidal plane shape, the channel is described by the enclosure of three pairs of straight line S.2. All expressions here are not optimized for mathematical elegance, but rather for being translated into an understandable and well-maintainable calculation routine. This is achieved by extensive substitution of the known variables. Subsuming of these magnitudes helps to simplify the later expressions and the transformation into an Due to the reason of symmetry, only three borders have to be described exactly:

$$\frac{1}{2}b(x) = E(x) \left\{ \begin{array}{ll} e_1(x) = m_1x = \frac{b_0}{2L_1} \cdot x & \forall \quad 0 \leq x \leq L_1 \\ e_2(x) = m_2x + t_2 = -\frac{b_{\Delta}}{2L_2} \cdot x + \frac{1}{2} \left( b_0 + \frac{L_1}{L_2} b_{\Delta} \right) & \forall \quad L_1 < x \leq L_{12} \\ e_3(x) = m_3x + t_3 = -\frac{b_L}{2L_3} \cdot x + \frac{Lb_L}{2L_3} & \forall \quad L_{12} < x \leq L \end{array} \right. \quad (\text{S.4})$$

As all dimensions here are known, the slopes and offsets of the lines can be calculated directly and don't have to be resubstituted after the following substitutions. The calculation of geometrical volume of the trapezoidal channel has to be adapted according to whether the focus position  $z_0$  is located left or right to the position of maximal channel extent ( i.e. if  $z_0 < L_1$  or  $z_0 \geq L_1$ ). In the algorithm later, rather the plane is used explicitly, which is obtained easily

$V^{\text{geo}}$ : Distal focussing with  $z_0 \geq L_1$

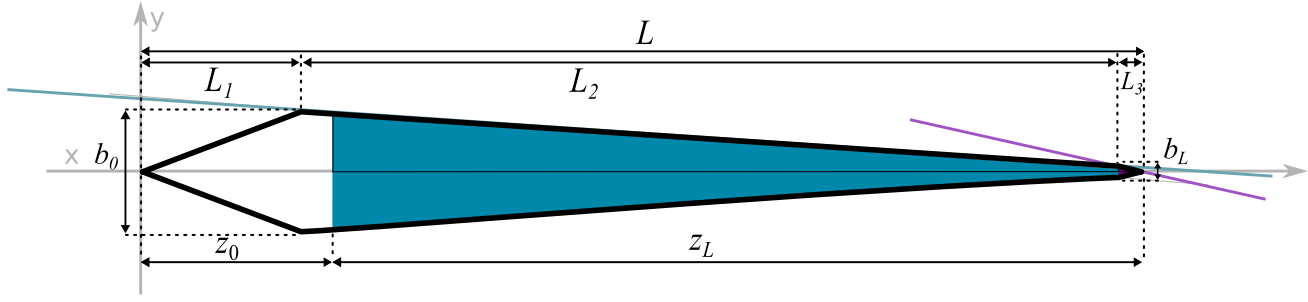


Fig. S.3: Area Section passed by the sample during the measurement marked with the color of the corresponding line in the case of distal focussing

In this case, the channel volume  $V^{\text{geo}}$  is the product of the channel width  $w$  and the colored area the  $x, y$ -plane of Fig. S.3. It is described by:

$$\begin{aligned}
 V^{\text{geo}} &= \left( A_2 + A_3 \right) \cdot w \\
 &= 2 \cdot \left( \int_{z_0}^{L_{12}} e_2(x) dx + \int_{L-L_3}^L e_3(x) dx \right) \cdot w \\
 &= \left( (L_{12} - z_0) (m_2 (L_{12} + z_0) + 2t_2) + \frac{1}{2} \cdot L_3 \cdot b_L \right) \cdot w \quad (\text{S.5})
 \end{aligned}$$

$V^{\text{geo}}$ : Proximal focussing with  $z_0 < L_1$

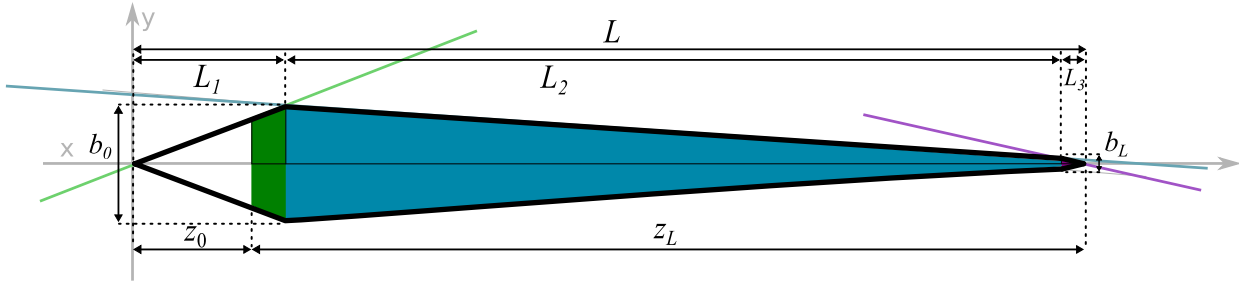


Fig. S.4: Area Section passed by the sample during the measurement marked with the color of the corresponding line in the case of proximal focussing

Outgoing from the previous result, the full area section of section 2 has to be considered, i.e. first  $z_0$  is replaced by  $L_1$ , then the area part of section 1 is added:

$$\begin{aligned}
 V^{\text{geo}} &= \left( A_1 + A_2 + A_3 \right) \cdot w \\
 &= 2 \cdot \left( \int_{z_0}^{L_1} e_1(x) dx + \int_{L_1}^{L_{12}} e_2(x) dx + \int_{L-L_3}^L e_3(x) dx \right) \cdot w \\
 &= \left( m_1 \cdot (L_1^2 - z_0^2) + m_2 L_{12} L_2 + m_2 L_1 L_2 + 2t_2 L_2 + \frac{1}{2} \cdot L_3 \cdot b_L \right) \cdot w \\
 &= \left( m_1 \cdot (L_1^2 - z_0^2) + \frac{1}{2} (b_0 + b_L) L_2 + \frac{1}{2} \cdot L_3 \cdot b_L \right) \cdot w \quad (\text{S.6})
 \end{aligned}$$

## Determination of “hydrodynamic” channel height $w^{\text{hyd}}$ and Volume $V^{\text{hyd}}$

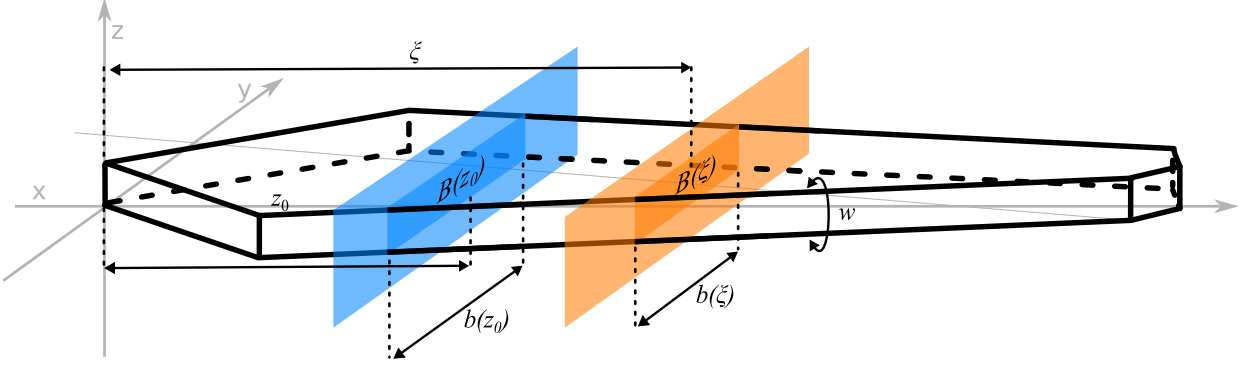


Fig. S.5: Cross sections  $B(\xi)$  of the channel at different positions  $\xi$

Here, the derivation is analogously conducted as described in literature<sup>[1, 5, 6]</sup>, but using the straight equations S.4 for description of the channel above. This takes into consideration that  $b(z)$  is variable over the whole channel length. In addition, also focussing into the first channel section is considered, for this reason, the the surface cannot just be corrected by a constant term as reported<sup>[6]</sup>.  $t_{\text{void}}$  is the void time of an unretained species which can be obtained by integration over the channel positions  $\xi$ . Although this derivation leads to rather laborious expressions, it has the advantage that no additional assumptions are necessary.

$$t_{\text{void}} = \int_0^{t_{\text{void}}} dt = \int_{z_0}^L \frac{1}{v_m(\xi)} d\xi \quad (\text{S.7})$$

$v_m(\xi)$  is the migration velocity of the eluent at a channel position  $\xi$ . It depends on the flow velocity  $\dot{V}(\xi)$  at the position and the  $y, z$  cross-sectional area  $B(\xi)$  at (Fig S.5)

$$v_m(\xi) = \frac{\dot{V}(\xi)}{B(\xi)} = \frac{\dot{V}(\xi)}{b(\xi) \cdot w} \quad (\text{S.8})$$

The term  $b(\xi)$  is described with the aid of eq. S.4 and will require a case-by-case approach. The change of the flow velocity  $\dot{V}(\xi)$  is exactly the total loss in the applied crossflow. It has its maximum at the inlet position with

$$\dot{V}(0) = \dot{V}_{\text{in}} = \dot{V}_e + \dot{V}_c \quad (\text{S.9})$$

and its minimum with

$$\dot{V}(L) = \dot{V}_e \quad (\text{S.10})$$

As this is distributed uniformly over the membrane surface, the decay is proportional to the area the eluent has already passed. This leads to the expression

$$\dot{V}(\xi) = \dot{V}_{\text{in}} - V_c \cdot \frac{A(\xi)}{A_L} = \dot{V}_{\text{in}} - V_c \cdot \frac{\int_0^\xi b(x) dx}{\int_0^L b(x) dx} = \dot{V}_{\text{in}} - V_c \cdot \frac{2 \cdot \int_0^\xi E(x) dx}{A_L} \quad (\text{S.11})$$

The total area  $A_L$  can be easily derived by letting of eq. S.6 with letting  $z_0 = 0$ :

$$A_L = \boxed{A_1} + \boxed{A_2} + \boxed{A_3} = \boxed{\frac{1}{2}b_0L_1} + \boxed{\frac{1}{2}(b_0 + b_L)L_2} + \boxed{\frac{1}{2}L_3b_L} \quad (\text{S.12})$$

To evaluate  $A(\xi)$  correctly, the integrals have to be split according to the conditions in eq. S.4. This is required which corresponds to the cases needed for  $b(\xi)$ . Merging eq. S.7 and S.11 gives the expression

$$v_m(\xi) = \frac{\dot{V}_{\text{in}} - V_c \cdot \frac{2 \cdot \int_0^\xi E(x) dx}{A_L}}{2 \cdot E(\xi) \cdot w} = \frac{1}{2 \cdot w} \cdot \frac{\dot{V}_{\text{in}} - V_c \cdot \frac{2 \cdot \int_0^\xi E(x) dx}{A_L}}{E(\xi)} \quad (\text{S.13})$$

Inserting into eq. S.7 gives:

$$t_{\text{void}} = 2 \cdot w \cdot \int_{z_0}^L \frac{E(\xi)}{\dot{V}_{\text{in}} - V_c \cdot \frac{2 \cdot \int_0^\xi E(x) dx}{A_L}} d\xi \quad (\text{S.14})$$

This expression quantifies a linear conversion factor  $C_F$  for the relationship of  $t_{\text{void}}$  and  $w$ . This promises a simple relationship between those two basic magnitudes with

$$t_{\text{void}} = 2 \cdot C_F \cdot w \quad (\text{S.15})$$

and

$$C_F = \int_{z_0}^L \frac{E(\xi)}{\dot{V}_{\text{in}} - V_c \cdot \frac{2 \cdot \int_0^\xi E(x) dx}{A_L}} d\xi \quad (\text{S.16})$$

Similar to the calculation of  $V^{\text{geo}}$  above, a case-by case analysis is required depending on  $z_0$ . Due to the section-wise definition of the integrand, the integrals then have to be split accordingly to the partial domain of  $E(\xi)$ .

**$V^{\text{hyd}}$ : Distal focussing with  $z_0 \geq L_1$**

Here, the outer integral of eq. S.14 is split into the sections with  $L_1 < \xi \leq L_{12}$  and  $L_{12} < \xi$ :

$$C_F = \int_{z_0}^{L_{12}} \frac{E(\xi)}{\dot{V}_{\text{in}} - \frac{2V_c}{A_L} \int_0^\xi E(x) dx} d\xi + \int_{L_{12}}^L \frac{E(\xi)}{\dot{V}_{\text{in}} - \frac{2V_c}{A_L} \int_0^\xi E(x) dx} d\xi \quad (\text{S.17})$$

As  $\xi$  is now located only on one of the section within each summand, the inner integrals can be split for the different domains of  $E(x)$ . Integrals independent from  $\xi$  are directly substituted with their corresponding area section from eq. S.12, only the last integral is solved.

$$\begin{aligned} C_F &= \int_{z_0}^{L_{12}} \frac{e_2(\xi)}{\dot{V}_{\text{in}} - \frac{2V_c}{A_L} \left( \int_0^{L_1} e_1(x) dx + \int_{L_1}^\xi e_2(x) dx \right)} d\xi \\ &+ \int_{L_{12}}^L \frac{e_3(\xi)}{\dot{V}_{\text{in}} - \frac{2V_c}{A_L} \left( \int_0^{L_1} e_1(x) dx + \int_{L_1}^{L_{12}} e_2(x) dx + \int_{L_{12}}^\xi e_3(x) dx \right)} d\xi \\ &= \int_{z_0}^{L_{12}} \frac{m_2 \cdot \xi + t_2}{\dot{V}_{\text{in}} - \frac{2V_c}{A_L} \left( \frac{1}{2}A_1 + \frac{1}{2}m_2(\xi^2 - L_1^2) + t_2(\xi - L_1) \right)} d\xi \\ &+ \int_{L_{12}}^L \frac{m_3 \cdot \xi + t_3}{\dot{V}_{\text{in}} - \frac{2V_c}{A_L} \left( \frac{1}{2}A_1 + \frac{1}{2}A_2 + \frac{1}{2}m_3(\xi^2 - L_{12}^2) + t_3(\xi - L_{12}) \right)} d\xi \end{aligned} \quad (\text{S.18})$$

In order to transform the integrand terms into ordinary rational functions and simplify the analytical solutions This can be rearranged by using substitutions for the occurring prefactors  $\alpha_i, \beta_i, \gamma_i, \delta_i$ , the quadratic polynomials  $P(\xi)$  and its discriminants  $\Delta_i$ :

$$\begin{aligned} \alpha_2 &= \frac{t_2}{m_2} \quad \beta_2 = -\frac{\dot{V}_c m_2}{A_L} \quad \gamma_2 = -\frac{2\dot{V}_c t_2}{A_L} \\ \delta_2 &= \dot{V}_{\text{in}} - \frac{\dot{V}_c}{A_L} (A_1 - m_2 L_1^2 - 2t_2 L_1) \quad \Delta_2 = 4\beta_2 \delta_2 - \gamma_2^2 \\ \alpha_3 &= \frac{t_3}{m_3} \quad \beta_3 = -\frac{\dot{V}_c m_3}{A_L} \quad \gamma_3 = -\frac{2\dot{V}_c t_3}{A_L} \\ \delta_3 &= \dot{V}_{\text{in}} - \frac{\dot{V}_c}{A_L} (A_1 + A_2 - m_3 L_{12}^2 - 2t_3 L_{12}) \quad \Delta_3 = 4\beta_3 \delta_3 - \gamma_3^2 \end{aligned} \quad (\text{S.19})$$

$$\begin{aligned} P_2(\xi) &= \beta_2 \xi^2 + \gamma_2 \xi + \delta_2 \\ P_3(\xi) &= \beta_3 \xi^2 + \gamma_3 \xi + \delta_3 \end{aligned} \quad (\text{S.20})$$

For solving the integral it is important to know the sign of  $\Delta_2$  and  $\Delta_3$ . Inserting S.9, it can be shown (see below) that it is not possible to determine the scope of  $\Delta_2$  exactly for the general case and the case-by-case analysis has to be conducted “at runtime”. To simplify the display of this expression, it is split and each summand treated separately:

$$C_F = C_{F2} + C_{F3} \quad (\text{S.21})$$

$$\begin{aligned}
C_{F2} &= m_2 \cdot \int_{z_0}^{L_{12}} \frac{\xi + \alpha_2}{\beta_2 \xi^2 + \gamma_2 \xi + \delta_2} d\xi \\
&= m_2 \cdot \left( \int_{z_0}^{L_{12}} \frac{\xi}{P_2(\xi)} d\xi + \int_{z_0}^{L_{12}} \frac{\alpha_2}{P_2(\xi)} d\xi \right) \\
&= m_2 \cdot \left( \left[ \frac{\ln P_2(\xi)}{2\beta_2} \right]_{z_0}^{L_{12}} + \left( \alpha_2 - \frac{\gamma_2}{2\beta_2} \right) \int_{z_0}^{L_{12}} \frac{d\xi}{P_2(\xi)} \right) \tag{7} \\
&= \begin{cases} m_2 \cdot \left( \left[ \frac{\ln P_2(\xi)}{2\beta_2} \right]_{z_0}^{L_{12}} + \left( \alpha_2 - \frac{\gamma_2}{2\beta_2} \right) \left[ \frac{2}{\sqrt{\Delta_2}} \cdot \arctan \left( \frac{2\beta_2 \xi + \gamma_2}{\sqrt{\Delta_2}} \right) \right]_{z_0}^{L_{12}} \right) & \forall \Delta_2 > 0 \\ m_2 \cdot \left( \left[ \frac{\ln P_2(\xi)}{2\beta_2} \right]_{z_0}^{L_{12}} + \left( \alpha_2 - \frac{\gamma_2}{2\beta_2} \right) \left[ -\frac{2}{\sqrt{-\Delta_2}} \cdot \operatorname{artanh} \left( \frac{2\beta_2 \xi + \gamma_2}{\sqrt{-\Delta_2}} \right) \right]_{z_0}^{L_{12}} \right) & \forall \Delta_2 < 0 \end{cases} \tag{8} \\
&= \begin{cases} m_2 \cdot \left( \frac{1}{2\beta_2} \left( \ln P_2(L_{12}) - \ln P_2(z_0) \right) + \left( \frac{2}{\sqrt{\Delta_2}} \right) \left( \alpha_2 - \frac{\gamma_2}{2\beta_2} \right) \left( \arctan \frac{2\beta_2 L_{12} + \gamma_2}{\sqrt{\Delta_2}} - \arctan \frac{2\beta_2 z_0 + \gamma_2}{\sqrt{\Delta_2}} \right) \right) & \forall \Delta_2 > 0 \\ m_2 \cdot \left( \frac{1}{2\beta_2} \left( \ln P_2(L_{12}) - \ln P_2(z_0) \right) - \left( \frac{2}{\sqrt{-\Delta_2}} \right) \left( \alpha_2 - \frac{\gamma_2}{2\beta_2} \right) \left( \operatorname{artanh} \frac{2\beta_2 L_{12} + \gamma_2}{\sqrt{-\Delta_2}} - \operatorname{artanh} \frac{2\beta_2 z_0 + \gamma_2}{\sqrt{-\Delta_2}} \right) \right) & \forall \Delta_2 < 0 \end{cases} \\
&= \begin{cases} m_2 \cdot \left( \frac{1}{2\beta_2} \ln \frac{P_2(L_{12})}{P_2(z_0)} + \left( \frac{2}{\sqrt{\Delta_2}} \right) \left( \alpha_2 - \frac{\gamma_2}{2\beta_2} \right) \left( \arctan \frac{2\beta_2 L_{12} + \gamma_2}{\sqrt{\Delta_2}} - \arctan \frac{2\beta_2 z_0 + \gamma_2}{\sqrt{\Delta_2}} \right) \right) & \forall \Delta_2 > 0 \\ m_2 \cdot \left( \frac{1}{2\beta_2} \ln \frac{P_2(L_{12})}{P_2(z_0)} - \left( \frac{2}{\sqrt{-\Delta_2}} \right) \left( \alpha_2 - \frac{\gamma_2}{2\beta_2} \right) \left( \operatorname{artanh} \frac{2\beta_2 L_{12} + \gamma_2 - 2\beta_2 z_0 - \gamma_2}{\sqrt{-\Delta_2} \cdot \left( 1 - \frac{2\beta_2 L_{12} + \gamma_2}{\sqrt{-\Delta_2}} \cdot \frac{2\beta_2 z_0 + \gamma_2}{\sqrt{-\Delta_2}} \right)} \right) \right) & \forall \Delta_2 < 0 \end{cases} \\
&= \begin{cases} m_2 \cdot \left( \frac{1}{2\beta_2} \ln \frac{P_2(L_{12})}{P_2(z_0)} + \left( \frac{2}{\sqrt{\Delta_2}} \right) \left( \alpha_2 - \frac{\gamma_2}{2\beta_2} \right) \left( \arctan \frac{2\beta_2 L_{12} + \gamma_2}{\sqrt{\Delta_2}} - \arctan \frac{2\beta_2 z_0 + \gamma_2}{\sqrt{\Delta_2}} \right) \right) & \forall \Delta_2 > 0 \\ m_2 \cdot \left( \frac{1}{2\beta_2} \ln \frac{P_2(L_{12})}{P_2(z_0)} - \left( \frac{2}{\sqrt{-\Delta_2}} \right) \left( \alpha_2 - \frac{\gamma_2}{2\beta_2} \right) \left( \operatorname{artanh} \frac{2\beta_2 (L_{12} - z_0)}{\left( \sqrt{-\Delta_2} - \frac{(2\beta_2 L_{12} + \gamma_2)(2\beta_2 z_0 + \gamma_2)}{\sqrt{-\Delta_2}} \right)} \right) \right) & \forall \Delta_2 < 0 \end{cases} \tag{S.22}
\end{aligned}$$

$$\begin{aligned}
C_{F3} &= m_3 \cdot \int_{L_{12}}^L \frac{\xi + \alpha_3}{\beta_3 \xi^2 + \gamma_3 \xi + \delta_3} d\xi \\
&= m_3 \cdot \left( \int_{L_{12}}^L \frac{\xi}{P_3(\xi)} d\xi + \int_{L_{12}}^L \frac{\alpha_3}{P_3(\xi)} d\xi \right) \\
&\dots \text{ analogously to eq. S.22 } \dots \\
&= \begin{cases} m_3 \cdot \left( \frac{1}{2\beta_3} \ln \frac{P_3(L)}{P_3(L_{12})} + \left( \frac{2}{\sqrt{\Delta_3}} \right) \left( \alpha_3 - \frac{\gamma_3}{2\beta_3} \right) \left( \arctan \frac{2\beta_3 L + \gamma_3}{\sqrt{\Delta_3}} - \arctan \frac{2\beta_3 L_{12} + \gamma_3}{\sqrt{\Delta_3}} \right) \right) & \forall \Delta_3 > 0 \\ m_3 \cdot \left( \frac{1}{2\beta_3} \ln \frac{P_3(L)}{P_3(L_{12})} - \left( \frac{2}{\sqrt{-\Delta_3}} \right) \left( \alpha_3 - \frac{\gamma_3}{2\beta_3} \right) \left( \operatorname{artanh} \frac{2\beta_3 (L - L_{12})}{\left( \sqrt{-\Delta_3} - \frac{(2\beta_3 L + \gamma_3)(2\beta_3 L_{12} + \gamma_3)}{\sqrt{-\Delta_3}} \right)} \right) \right) & \forall \Delta_3 < 0 \end{cases} \\
&= \begin{cases} m_3 \cdot \left( \frac{1}{2\beta_3} \ln \frac{P_3(L)}{P_3(L_{12})} + \left( \frac{2}{\sqrt{\Delta_3}} \right) \left( \alpha_3 - \frac{\gamma_3}{2\beta_3} \right) \left( \arctan \frac{2\beta_3 L + \gamma_3}{\sqrt{\Delta_3}} - \arctan \frac{2\beta_3 L_{12} + \gamma_3}{\sqrt{\Delta_3}} \right) \right) & \forall \Delta_3 > 0 \\ m_3 \cdot \left( \frac{1}{2\beta_3} \ln \frac{P_3(L)}{P_3(L_{12})} - \left( \frac{2}{\sqrt{-\Delta_3}} \right) \left( \alpha_3 - \frac{\gamma_3}{2\beta_3} \right) \left( \operatorname{artanh} \frac{2\beta_3 (L - L_{12})}{\left( \sqrt{-\Delta_3} - \frac{(2\beta_3 L + \gamma_3)(2\beta_3 L_{12} + \gamma_3)}{\sqrt{-\Delta_3}} \right)} \right) \right) & \forall \Delta_3 < 0 \end{cases} \tag{S.23}
\end{aligned}$$

$V^{\text{hyd}}$ : **Proximal focusing with  $z_0 < L_1$**

If the sample was focused to a point with  $z_0 < L_1$ , the in addition to the solution above, also the eluent migration through the first sections has to be considered. The evaluation of the expression can be conducted analogously for the second and third summand as shown above with adaption of the lower limit of integration for the second:

$$\begin{aligned}
C_F &= \int_{z_0}^{L_1} \frac{e_1(\xi)}{\dot{V}_{\text{in}} - \frac{2V_c}{A_L} \left( \int_0^\xi e_1(x) dx \right)} d\xi \\
&+ \int_{L_1}^{L_{12}} \frac{e_2(\xi)}{\dot{V}_{\text{in}} - \frac{2V_c}{A_L} \left( \int_0^{L_1} e_1(x) dx + \int_{L_1}^\xi e_2(x) dx \right)} d\xi \\
&+ \int_{L_{12}}^L \frac{e_3(\xi)}{\dot{V}_{\text{in}} - \frac{2V_c}{A_L} \left( \int_0^{L_1} e_1(x) dx + \int_{L_1}^{L_{12}} e_2(x) dx + \int_{L_{12}}^\xi e_3(x) dx \right)} d\xi \\
&= \int_{z_0}^{L_1} \frac{m_1 \cdot \xi}{\dot{V}_{\text{in}} - \frac{2V_c}{A_L} \left( \frac{1}{2} m_1 \xi^2 \right)} d\xi \\
&+ \int_{L_1}^{L_{12}} \frac{m_2 \cdot \xi + t_2}{\dot{V}_{\text{in}} - \frac{2V_c}{A_L} \left( \frac{1}{2} A_1 + \frac{1}{2} m_2 (\xi^2 - L_1^2) + t_2 (\xi - L_1) \right)} d\xi \\
&+ \int_{L_{12}}^L \frac{m_3 \cdot \xi + t_3}{\dot{V}_{\text{in}} - \frac{2V_c}{A_L} \left( \frac{1}{2} A_1 + \frac{1}{2} A_2 + \frac{1}{2} m_3 (\xi^2 - L_{12}^2) + t_3 (\xi - L_{12}) \right)} d\xi
\end{aligned} \tag{S.24}$$

Substitution is done similarly as above:

$$\begin{aligned}
\beta_1 &= -\frac{\dot{V}_c m_1}{A_L} & \delta_1 &= \dot{V}_{\text{in}} \\
\alpha_2 &= \frac{t_2}{m_2} & \beta_2 &= -\frac{\dot{V}_c m_2}{A_L} & \gamma_2 &= -\frac{2\dot{V}_c t_2}{A_L} \\
\delta_2 &= \dot{V}_{\text{in}} - \frac{\dot{V}_c}{A_L} (A_1 - m_2 L_1^2 - 2t_2 L_1) & \Delta_2 &= 4\beta_2 \delta_2 - \gamma_2^2 \\
\alpha_3 &= \frac{t_3}{m_3} & \beta_3 &= -\frac{\dot{V}_c m_3}{A_L} & \gamma_3 &= -\frac{2\dot{V}_c t_3}{A_L} \\
\delta_3 &= \dot{V}_{\text{in}} - \frac{\dot{V}_c}{A_L} (A_1 + A_2 - m_3 L_{12}^2 - 2t_3 L_{12}) & \Delta_3 &= 4\beta_3 \delta_3 - \gamma_3^2
\end{aligned} \tag{S.25}$$

$$\begin{aligned}
P_2(\xi) &= \beta_2 \xi^2 + \gamma_2 \xi + \delta_2 \\
P_3(\xi) &= \beta_3 \xi^2 + \gamma_3 \xi + \delta_3
\end{aligned} \tag{S.26}$$



Then, in analogy, to the case  $z_0 \geq L_1$ ,  $C_F$  can be expressed as

$$\begin{aligned}
C_F &= C_{F1} + C_{F2} + C_{F3} \\
&= m_1 \cdot \int_{z_0}^{L_1} \left( \frac{\xi}{\beta_1 \cdot \xi^2 + \delta_1} \right) d\xi \\
&\quad + m_2 \cdot \int_{L_1}^{L_{12}} \left( \frac{\xi + \alpha_2}{\beta_2 \xi^2 + \gamma_2 \xi + \delta_2} \right) d\xi \\
&\quad + m_3 \cdot \int_{L_{12}}^L \left( \frac{\xi + \alpha_3}{\beta_3 \xi^2 + \gamma_3 \xi + \delta_3} \right) d\xi
\end{aligned} \tag{S.27}$$

with

$$\begin{aligned}
C_{F1} &= m_1 \cdot \int_{z_0}^{L_1} \left( \frac{\xi}{\beta_1 \cdot \xi^2 + \delta_1} \right) d\xi \\
&= \frac{m_1}{\beta_1} \cdot \int_{z_0}^{L_1} \left( \frac{\xi}{\frac{\delta_1}{\beta_1} + \xi^2 W} \right) d\xi \\
&= \frac{m_1}{\beta_1} \cdot \frac{1}{2} \left[ \ln \left( \left| \frac{\delta_1}{\beta_1} + \xi^2 \right| \right) \right]_{z_0}^{L_1} \\
&= \frac{m_1}{2\beta_1} \cdot \left( \ln \left| \frac{\delta_1}{\beta_1} + L_1^2 \right| - \ln \left| \frac{\delta_1}{\beta_1} + z_0^2 \right| \right)
\end{aligned} \tag{S.28}$$

$$C_{F2} = \begin{cases} m_2 \cdot \left( \frac{1}{2\beta_2} \ln \frac{P_2(L_{12})}{P_2(L_1)} + \left( \frac{2}{\sqrt{\Delta_2}} \right) \left( \alpha_2 - \frac{\gamma_2}{2\beta_2} \right) \left( \arctan \frac{2\beta_2 L_{12} + \gamma_2}{\sqrt{\Delta_2}} - \arctan \frac{2\beta_2 L_1 + \gamma_2}{\sqrt{\Delta_2}} \right) \right) & \forall \Delta_2 > 0 \\ m_2 \cdot \left( \frac{1}{2\beta_2} \ln \frac{P_2(L_{12})}{P_2(L_1)} - \left( \frac{2}{\sqrt{-\Delta_2}} \right) \left( \alpha_2 - \frac{\gamma_2}{2\beta_2} \right) \left( \operatorname{artanh} \left( \frac{2\beta_2(L_{12} - L_1)}{\sqrt{-\Delta_2} - \frac{(2\beta_2 L_{12} + \gamma_2)(2\beta_2 z_0 + \gamma_2)}{\sqrt{-\Delta_2}}} \right) \right) \right) & \forall \Delta_2 < 0 \end{cases} \tag{S.29}$$

$$C_{F3} = \begin{cases} m_3 \cdot \left( \frac{1}{2\beta_3} \ln \frac{P_3(L)}{P_3(L_{12})} + \left( \frac{2}{\sqrt{\Delta_3}} \right) \left( \alpha_3 - \frac{\gamma_3}{2\beta_3} \right) \left( \arctan \frac{2\beta_3 L + \gamma_3}{\sqrt{\Delta_3}} - \arctan \frac{2\beta_3 L_{12} + \gamma_3}{\sqrt{\Delta_3}} \right) \right) & \forall \Delta_3 > 0 \\ m_3 \cdot \left( \frac{1}{2\beta_3} \ln \frac{P_3(L)}{P_3(L_{12})} - \left( \frac{2}{\sqrt{-\Delta_3}} \right) \left( \alpha_3 - \frac{\gamma_3}{2\beta_3} \right) \left( \operatorname{artanh} \left( \frac{2\beta_3(L - L_{12})}{\sqrt{-\Delta_3} - \frac{(2\beta_3 L + \gamma_3)(2\beta_3 L_{12} + \gamma_3)}{\sqrt{-\Delta_3}}} \right) \right) \right) & \forall \Delta_3 < 0 \end{cases} \tag{S.30}$$

### Evaluation of $\Delta_2$

To avoid an additional case-by-case analysis for the integration, the discriminants the polynomials  $P_2(\xi)$  and  $P_3(\xi)$  each were resubstituted to derive that only one of the cases

$$\int \frac{d\xi}{\beta_i \xi^2 + \gamma_i \xi + \delta_i} \begin{cases} = \frac{2}{\sqrt{\Delta_i}} \cdot \arctan \left( \frac{2\beta_i \xi_i + \gamma_i}{\sqrt{\Delta_i}} \right) & \forall \Delta_i > 0 \\ = -\frac{2}{\sqrt{-\Delta_i}} \cdot \operatorname{artanh} \left( \frac{2\beta_i \xi_i + \gamma_i}{\sqrt{-\Delta_i}} \right) & \forall \Delta_i < 0 \end{cases} \tag{8}$$

has to be applied for the evaluation of  $C_F$ :

$$\begin{aligned}
\Delta_2 &= 4\beta_2\delta_2 - \gamma_2^2 \\
&= 4 \cdot \left(-\frac{\dot{V}_c m_2}{A_L}\right) \cdot \left(\dot{V}_{\text{in}} - \frac{\dot{V}_c}{A_L} (A_1 - m_2 L_1^2 - 2t_2 L_1)\right) - \left(-\frac{2\dot{V}_c t_2}{A_L}\right)^2 \\
&= -4 \cdot \frac{\dot{V}_c m_2 \dot{V}_{\text{in}}}{A_L} + 4 \cdot \frac{\dot{V}_c^2 m_2 A_1}{A_L^2} - 4 \cdot \frac{\dot{V}_c^2 m_2^2 L_1^2}{A_L^2} - 4 \cdot \frac{2\dot{V}_c^2 m_2 t_2 L_1}{A_L^2} - 4 \cdot \frac{\dot{V}_c^2 t_2^2}{A_L^2} \\
&= \left(4 \cdot \frac{\dot{V}_c^2}{A_L^2}\right) \cdot (-m_2 A_1 + m_2^2 L_1^2 - 2m_2 t_2 L_1 - t_2^2) - 4 \cdot \frac{\dot{V}_c m_2 \dot{V}_{\text{in}}}{A_L} \\
&= \left(\frac{\dot{V}_c^2}{A_L^2}\right) \cdot \left(-\frac{L_1}{L_2} b_0 b_\Delta - \frac{L_1^2}{L_2^2} b_\Delta^2 + 2\frac{L_1}{L_2} b_0 b_\Delta + 2\frac{L_1^2}{L_2^2} b_\Delta^2 - b_0^2 - 2\frac{L_1}{L_2} b_0 b_\Delta - \frac{L_1^2}{L_2^2} b_\Delta^2\right) + 2 \cdot \frac{b_\Delta \dot{V}_c \dot{V}_{\text{in}}}{L_2 A_L} \\
&= \left(\frac{\dot{V}_c^2}{A_L^2}\right) \cdot \left(-\frac{L_1}{L_2} b_0 b_\Delta - b_0^2\right) + 2 \cdot \frac{b_\Delta \dot{V}_c \dot{V}_{\text{in}}}{L_2 A_L} \\
&= \left(\frac{\dot{V}_c}{A_L}\right) \cdot \left(-\frac{\dot{V}_c}{A_L} \frac{L_1}{L_2} b_0 b_\Delta - \frac{\dot{V}_c}{A_L} b_0^2 + 2\frac{b_\Delta}{L_2} \dot{V}_{\text{in}}\right) \\
&= \left(\frac{\dot{V}_c}{A_L^2}\right) \left(\dot{V}_{\text{in}} \cdot \left(2\frac{b_\Delta}{L_2} A_L\right) - \dot{V}_c \cdot \left(\frac{L_1}{L_2} b_0 b_\Delta + b_0^2\right)\right) \\
&= \left(\frac{\dot{V}_c}{A_L^2}\right) \left(\dot{V}_{\text{in}} \cdot \left(2\frac{b_\Delta}{L_2} \left(\frac{1}{2} b_0 L_1 + \frac{1}{2} (b_0 + b_L) L_2 + \frac{1}{2} L_3 b_L\right)\right) - \dot{V}_c \cdot \left(\frac{L_1}{L_2} b_0 b_\Delta + b_0^2\right)\right) \\
&= \left(\frac{\dot{V}_c}{A_L^2}\right) \left(\dot{V}_{\text{in}} \cdot \left(\frac{L_1}{L_2} b_\Delta b_0 + b_\Delta b_0 + b_\Delta b_L + \frac{L_3}{L_2} b_L b_\Delta\right) - \dot{V}_c \cdot \left(\frac{L_1}{L_2} b_0 b_\Delta + b_0^2\right)\right)
\end{aligned} \tag{S.31}$$

It turns out that the sign of the discriminant cannot be determined exactly without prior knowledge about the parameters. and the sign of the discriminants have to be determined “at runtime”.

## Simplified formalism

A much shorter version has already been derived with the assumptions  $L_2 \approx L_2 + L_3$  and  $b(L) \approx b(L_{12}) = b_L$ .<sup>[6]</sup> This leads to the expression:

$$\begin{aligned}
t_{\text{void}} &= \frac{V^{\approx \text{geo}}}{\dot{V}_c} \ln \left( 1 + \frac{\dot{V}_c}{\dot{V}_e} \left( 1 - \frac{w \left( b_0 z_0 - \frac{z_0^2 b_\Delta}{2L} - \int_0^{z_0} b(z) dz \right)}{V^{\approx \text{geo}}} \right) \right) \\
&= \frac{V^{\approx \text{geo}}}{\dot{V}_c} \ln \left( 1 + \frac{\dot{V}_c}{\dot{V}_e} \left( 1 - \frac{b_0 z_0 - \frac{z_0^2 b_\Delta}{2L} - \int_0^{z_0} b(z) dz}{A_L - \int_0^{z_0} b(z) dz} \right) \right)
\end{aligned} \tag{S.32}$$

## UML class diagram

Perhaps, but not mandatory

## User interface

2 images

## Detailed description of applied algorithms

### Classical Calibration

#### Inputs:

- void peak  $t_{\text{void}}$
- elution flow  $\dot{V}_e$
- elution time  $t_e$
- cross flow  $\dot{V}_c$
- diffusion coefficient  $D$
- relative focus  $z\%$ ;

#### Outputs:

- channel width  $w$
- channel volume  $V^0$

#### Constants:

- $w_{\min} \leftarrow 10^{-4}$
- $w_{\max} \leftarrow 10$

#### Temporary variables:

- measured retention  $R_{\text{meas}}$
- variation  $\delta_w$
- $\lambda$

#### Calculations:

- 1 Calculate volume:

$$V^0 \leftarrow \frac{V_c \cdot t_{\text{void}}}{\ln \left( \frac{z\% - (V_e + V_c)/V_c}{1 - (V_e + V_c)/V_c} \right)}$$

- 2 Calculate  $R_{\text{meas}}$ :

$$R_{\text{meas}} \leftarrow \frac{t_{\text{void}}}{t_e}$$

- 3 Initialize  $w$  and  $\delta$ :

$$w \leftarrow \frac{w_{\max} + w_{\min}}{2}$$

$$\delta_w \leftarrow \frac{w_{\max} - w_{\min}}{4}$$

- 4 Find  $w$  such that  $|R_{\text{meas}} - R_{\text{calc}}| \stackrel{!}{=} \min$  by bisection:

**for**  $i \leftarrow 0$  to 50 **do**

$$\lambda \leftarrow \frac{D \cdot V^0}{V_c \cdot w^2}$$

$$R_{\text{calc}} \leftarrow 6\lambda \left( \frac{1}{\tanh(1/2\lambda)} - 2\lambda \right) \# 1/\tanh(x) = \coth(x)$$

**if**  $R_{\text{calc}} > R_{\text{meas}}$  **then**

$$w \leftarrow w + \delta_w$$

**else**

$$w \leftarrow w - \delta_w$$

**end if**

$$\delta_w \leftarrow \delta_w/2$$

**end for**

## Calibration of channel height by $V^{\text{geo}}$

### Inputs:

- void peak  $t_{\text{void}}$
- elution time  $t_e$
- cross flow  $\dot{V}_c$
- diffusion coefficient  $D$
- relative focus  $z_0$ ;
- $L_1, L_2, L_3$
- $b_0, b_L$

### Outputs:

- channel height  $w$
- channel volume  $V^{\text{geo}}$

### Temporary variables:

- measured retention  $R_{\text{meas}}$
- calculated retention  $R_{\text{calc}}$
- variation  $\delta_\lambda$
- $\lambda$
- $S$
- $L_{12}, L$
- $z_0$
- $m_1, m_2$
- $t_2$
- $A_z$
- $A_3$

### Constants:

- $\lambda_{\min} \leftarrow 10^{-5}$
- $\lambda_{\max} \leftarrow 100$

### Calculations:

- 1 Calculate  $R_{\text{meas}}$ :

$$R_{\text{meas}} \leftarrow \frac{t_{\text{void}}}{t_e}$$

- 2 Initialize  $\lambda$  and  $\delta_\lambda$ :

$$\lambda \leftarrow \frac{\lambda_{\min} + \lambda_{\max}}{2}$$

$$\delta_\lambda \leftarrow \frac{\lambda_{\max} - \lambda_{\min}}{4}$$

- 3 Find  $\lambda$  such that  $|R_{\text{meas}} - R_{\text{calc}}| \stackrel{!}{=} \min$  by bisection:

**for**  $i \leftarrow 0$  to 50 **do**

$$R_{\text{calc}} \leftarrow 6\lambda \left( \frac{1}{\tanh(1/2\lambda)} - 2\lambda \right) \# 1/\tanh(x) = \coth(x)$$

**if**  $R_{\text{calc}} > R_{\text{meas}}$  **then**

$$\lambda \leftarrow \lambda + \delta_\lambda$$

**else**

$$\lambda \leftarrow \lambda - \delta_\lambda$$

**end if**

$$\delta_\lambda \leftarrow \delta_\lambda / 2$$

**end for**

- 4 Calculate substitution term  $S$ :

$$S \leftarrow \frac{\lambda \cdot \dot{V}_c}{D}$$

**5** Calculate passed channel area  $A_z$ :

$$A_3 \leftarrow \frac{1}{2} \cdot b_L L_3 \quad L_{12} \leftarrow L_1 + L_2 \quad L \leftarrow L_{12} + L_3 \quad z_0 \leftarrow z_{\%} \cdot L$$

**if**  $z_0 \geq L_1$  **then**

$$m_2 \leftarrow \frac{b_0 - b_L}{2 \cdot L_2} \quad b_{\Delta} \leftarrow b_0 - b_L \quad t_2 \leftarrow \frac{1}{2} \left( b_0 + \frac{L_1}{L_2} b_{\Delta} \right)$$

$$A_z \leftarrow (L_{12} - z_0) \cdot (m_2(L_{12} + z_0) + t_2) + A_3$$

**else**

$$m_1 \leftarrow \frac{b_0}{2L_1}$$

$$A_z \leftarrow m_1 \cdot (L_1^2 - z_0^2) + \frac{1}{2}(b_0 + b_L)L_2 + A_3$$

**end if**

**6** Calculate  $w$ :

$$w \leftarrow \frac{A_z}{S}$$

**7** Calculate  $V^{\text{geo}}$ :

$$V^{\text{geo}} \leftarrow A_z \cdot w$$

## Calibration of channel height by $V^{\text{hyd}}$

### Inputs:

- void peak  $t_{\text{void}}$
- elution flow  $\dot{V}_e$
- cross flow  $\dot{V}_c$
- relative focus  $z_{\%}$ ;
- $L_1, L_2, L_3$
- $b_0, b_L$

### Outputs:

- channel width  $w$
- channel volume  $V^{\text{hyd}}$

### Temporary variables:

- $z_0$
- $\dot{V}_{\text{in}}$
- $L_{12}, L$
- $b_{\Delta}$
- $m_1, m_2, m_3$
- $t_2, t_3$
- $\alpha_2, \alpha_3$
- $\beta_1, \beta_2, \beta_3$
- $\gamma_2, \gamma_3$
- $\delta_1, \delta_2, \delta_3$
- $\Delta_2, \Delta_3$
- $C_{F1}, C_{F2}, C_{F3}, C_F$
- $T_1, T_2$

### Calculations:

1 Calculate "derived" parameters:

$$L_{12} \leftarrow L_1 + L_2 \quad L \leftarrow L_{12} + L_3 \quad z_0 \leftarrow z_{\%} \cdot L \quad b_{\Delta} \leftarrow b_0 - b_L \quad \dot{V}_{\text{in}} \leftarrow \dot{V}_e + \dot{V}_c$$

2 Calculate slopes and offsets of the border lines of the channel plain:

$$m_1 \leftarrow \frac{b_0}{2L_1} \quad m_2 \leftarrow -\frac{b_{\Delta}}{2L_2} \quad m_3 \leftarrow -\frac{b_L}{2L_3}$$

$$t_2 \leftarrow \frac{1}{2} \left( b_0 + \frac{L_1 b_{\Delta}}{L_2} \right) \quad t_3 \leftarrow \frac{L b_L}{2L_3}$$

3 Calculate area sections of the channel plain:

$$A_1 \leftarrow \frac{1}{2} b_0 L_1 \quad A_2 \leftarrow \frac{1}{2} (b_0 + b_L) L_2 \quad A_3 \leftarrow \frac{1}{2} L_3 b_L$$

$$A_L \leftarrow A_1 + A_2 + A_3$$

4 Calculate substitution parameters and discriminants:

$$\alpha_2 \leftarrow \frac{t_2}{m_2} \quad \alpha_3 \leftarrow \frac{t_3}{m_3}$$

$$\beta_1 \leftarrow -\frac{\dot{V}_c m_1}{A_L} \quad \beta_2 \leftarrow -\frac{\dot{V}_c m_2}{A_L} \quad \beta_3 \leftarrow -\frac{\dot{V}_c m_3}{A_L}$$

$$\gamma_2 \leftarrow -\frac{2\dot{V}_c t_2}{A_L} \quad \gamma_3 \leftarrow -\frac{2\dot{V}_c t_3}{A_L}$$

$$\delta_1 \leftarrow \dot{V}_{\text{in}} \quad \delta_2 \leftarrow \dot{V}_{\text{in}} - \frac{\dot{V}_c}{A_L} (A_1 - m_2 L_1^2 - 2t_2 L_1)$$

$$\delta_3 \leftarrow \dot{V}_{\text{in}} - \frac{\dot{V}_c}{A_L} (A_1 + A_2 - m_3 L_{12}^2 - 2t_3 L_{12})$$

$$\Delta_2 \leftarrow 4\beta_2 \delta_2 - \gamma_2^2 \quad \Delta_3 \leftarrow 4\beta_3 \delta_3 - \gamma_3^2$$

**5** Calculate conversion factor  $C_F$ :

**if**  $\Delta_3 > 0$  **then**

$$C_{F3} \leftarrow \text{IntPosDisc}(\alpha_3, \beta_3, \gamma_3, \delta_3, \Delta_3, L_{12}, L, m_3)$$

**else**

$$C_{F3} \leftarrow \text{IntNegDisc}(\alpha_3, \beta_3, \gamma_3, \delta_3, \Delta_3, L_{12}, L, m_3)$$

**end if**

**if**  $z_0 \geq L_1$  **then**

**if**  $\Delta_2 > 0$  **then**

$$C_{F2} \leftarrow \text{IntPosDisc}(\alpha_2, \beta_2, \gamma_2, \delta_2, \Delta_2, z_0, L_{12}, m_2)$$

**else**

$$C_{F2} \leftarrow \text{IntNegDisc}(\alpha_2, \beta_2, \gamma_2, \delta_2, \Delta_2, z_0, L_{12}, m_2)$$

**end if**

$$C_F \leftarrow C_{F2} + C_{F3}$$

**else**

**if**  $\Delta_2 > 0$  **then**

$$C_{F2} \leftarrow \text{IntPosDisc}(\alpha_2, \beta_2, \gamma_2, \delta_2, \Delta_2, L_1, L_{12}, m_2)$$

**else**

$$C_{F2} \leftarrow \text{IntNegDisc}(\alpha_2, \beta_2, \gamma_2, \delta_2, \Delta_2, L_1, L_{12}, m_2)$$

**end if**

$$C_{F1} \leftarrow \text{IntOne}(\beta_1, \delta_1, z_0, L_1, m_1)$$

$$C_F \leftarrow C_{F1} + C_{F2} + C_{F3}$$

**end if**

**6** Calculate  $w$ :

$$w \leftarrow \frac{t_{\text{void}}}{2 \cdot C_F}$$

**7** Calculate passed channel area  $A$ :

**if**  $z_0 \geq L_1$  **then**

$$A_z \leftarrow (L_{12} - z_0) \cdot (m_2(L_{12} + z_0) + t_2) + A_3$$

**else**

$$A_z \leftarrow m_1 \cdot (L_1^2 - z_0^2) + A_2 + A_3$$

**end if**

**8** Calculate  $V^{\text{hyd}}$ :

$$V^{\text{hyd}} \leftarrow A_z \cdot w$$

## S subroutines

**S1** Polynomial  $P$ :

$$P(\beta, \gamma, \delta, \xi) := \beta\xi^2 + \gamma\xi + \delta$$

**S2**

$$\text{IntPosDisc}(\alpha, \beta, \gamma, \delta, \Delta, s_0, s_1, m_i) :=$$

$$C_{Fi} \leftarrow \ln\left(\frac{P(\beta, \gamma, \delta, s_1)}{P(\beta, \gamma, \delta, s_0)}\right)$$

$$C_{Fi} \leftarrow \frac{C_{Fi}}{2\beta}$$

$$T_0 \leftarrow \sqrt{\Delta}$$

$$T_1 \leftarrow \arctan\left(\frac{2\beta s_1 + \gamma}{T_0}\right)$$

$$T_2 \leftarrow \arctan\left(\frac{2\beta s_0 + \gamma}{T_0}\right)$$

$$T_3 \leftarrow \left(\frac{2}{T_0}\right) \cdot \left(\alpha - \frac{\gamma}{\beta}\right) \cdot (T_1 - T_2)$$

$$C_{Fi} \leftarrow (C_{Fi} + T_3) \cdot m_i$$

**return**  $C_{Fi}$

**S3**

$$\text{IntNegDisc}(\alpha, \beta, \gamma, \delta, \Delta, s_0, s_1, m_i) :=$$

$$C_{Fi} \leftarrow \ln\left(\frac{P(\beta, \gamma, \delta, s_1)}{P(\beta, \gamma, \delta, s_0)}\right)$$

$$C_{Fi} \leftarrow \frac{C_{Fi}}{2\beta}$$

$$T_0 \leftarrow \sqrt{-\Delta}$$

$$T_1 \leftarrow (2 \cdot \beta \cdot s_1 + \gamma) (2 \cdot \beta \cdot s_0 + \gamma)$$

$$T_1 \leftarrow T_0 - \frac{T_1}{T_0}$$

$$T_1 \leftarrow \frac{2 \cdot \beta \cdot (s_1 - s_0)}{T_1}$$

$$T_1 \leftarrow \text{artanh}(T_1)$$

$$T_1 \leftarrow \left(\frac{2}{T_0}\right) \cdot \left(\alpha - \frac{\gamma}{\beta}\right) \cdot T_1$$

$$C_{Fi} \leftarrow (C_{Fi} - T_1) \cdot m_i$$

**return**  $C_{Fi}$

**S4**

$$\text{IntOne}(\beta, \delta, s_0, s_1, m_1) :=$$

$$T_0 \leftarrow \frac{\delta}{\beta}$$

$$C_{F1} \leftarrow \ln|T_0 + s_1^2|$$

$$C_{F1} \leftarrow C_{F1} - \ln|T_0 + s_0^2|$$

$$C_{F1} \leftarrow \frac{m_1}{2\beta} \cdot C_{F1}$$

**return**  $C_{F1}$



## Classical axis conversion of $t \longrightarrow D \longrightarrow R_S$

### Inputs:

- time  $t_j$
- volume  $V^0$
- relative focus  $z\%$ ;
- cross flow  $\dot{V}_c$
- channel width  $w$
- temperature  $T$
- viscosity  $\eta$

### Outputs:

- $D_j$
- $R_{Sj}$

### Temporary Variables:

- void Peak  $t_{\text{void}}$
- measured retention  $R_{\text{meas}}$
- variation  $\delta_\lambda$
- $\lambda$
- temp. variable  $T_0$

### Constants:

- $\lambda_{\min} \leftarrow 10^{-5}$
- $\lambda_{\max} \leftarrow 100$

1 Calculate  $t_{\text{void}}$ :

$$t_{\text{void}} \leftarrow \frac{V^0}{\dot{V}_c} \cdot \ln \left( \frac{z\% - (\dot{V}_e + \dot{V}_c)/\dot{V}_c}{1 - (\dot{V}_e + \dot{V}_c)/\dot{V}_c} \right)$$

2 Initialize  $\lambda$  and  $\delta_\lambda$ :

$$\lambda \leftarrow \frac{\lambda_{\min} + \lambda_{\max}}{2}$$

$$\delta_\lambda \leftarrow \frac{\lambda_{\max} - \lambda_{\min}}{4}$$

3 Find such  $\lambda$  that  $|R_{\text{meas}} - R_{\text{calc}}| \stackrel{!}{=} \min$  by bisection and convert to  $D_j$ :

$$T_0 \leftarrow \frac{V^0}{\dot{V}_c \cdot w^2}$$

**for all**  $t_j > t_{\text{void}}$  **do**

$$R_{\text{meas}} \leftarrow \frac{t_{\text{void}}}{t_j}$$

**for**  $k \leftarrow 0$  **to** 50 **do**

$$R_{\text{calc}} \leftarrow 6\lambda \left( \frac{1}{\tanh(1/2\lambda)} - 2\lambda \right) \# 1/\tanh(x) = \coth(x)$$

**if**  $R_{\text{calc}} > R_{\text{Meas}}$  **then**

$$\lambda \leftarrow \lambda - \delta_\lambda$$

**else**

$$\lambda \leftarrow \lambda + \delta_\lambda$$

**end if**

$$\delta_\lambda \leftarrow \delta/2$$

**end for**

$$D_j \leftarrow \frac{\lambda}{T_0}$$

**end for**

4 Calculate  $R_{Sj}$ :

**for all**  $D_j$  **do**

$$R_{Sj} \leftarrow \frac{k_B \cdot T}{6\pi \cdot \eta D_j}$$

**end for**

### Axis conversion of $t \longrightarrow D \longrightarrow R_S$ with $V^{\text{hyd}}$

#### Inputs:

- $t_j$
- channel width  $w$
- channel volume  $V^{\text{hyd}}$
- elution flow  $\dot{V}_e$
- cross flow  $\dot{V}_c$
- relative focus  $z\%$ ;
- $L_1, L_2, L_3$
- $b_0, b_L$

#### Outputs:

- $D_j$
- $R_{Sj}$

#### Temporary variables:

- void peak  $t_{\text{void}}$
- $T_0$
- $\lambda$
- $\delta_\lambda$
- $R_{\text{meas}}, R_{\text{calc}}$
- $z_0$
- $L_{12}, L$
- $b_\Delta$
- $m_1, m_2, m_3$
- $t_2, t_3$
- $\alpha_2, \alpha_3$
- $\beta_1, \beta_2, \beta_3$
- $\gamma_2, \gamma_3$
- $\delta_1, \delta_2, \delta_3$
- $\Delta_2, \Delta_3$
- $C_{F1}, C_{F2}, C_{F3}, C_F$
- $T_1, T_2$

#### Constants:

- $\lambda_{\min} \leftarrow 10^{-5}$
- $\lambda_{\max} \leftarrow 100$

#### Calculations

**1-5** Same steps as for the calibration with  $V^{\text{hyd}}$  (gives  $C_F$ )

**6**  $t_{\text{void}} \leftarrow 2w \cdot C_F$

**7** Initialize  $\lambda$  and  $\delta_\lambda$ :

$$\lambda \leftarrow \frac{\lambda_{\min} + \lambda_{\max}}{2}$$

$$\delta_\lambda \leftarrow \frac{\lambda_{\max} - \lambda_{\min}}{4}$$

**8** Find such  $\lambda$  that  $|R_{\text{meas}} - R_{\text{calc}}| \stackrel{!}{=} \min$  by bisection and convert to  $D_j$ :

$$T_0 \leftarrow \frac{V^{\text{hyd}}}{\dot{V}_c \cdot w^2}$$

**for all**  $t_j > t_{\text{void}}$  **do**

$$R_{\text{meas}} \leftarrow \frac{t_{\text{void}}}{t_j}$$

**for**  $k \leftarrow 0$  to 50 **do**

$$R_{\text{calc}} \leftarrow 6\lambda \left( \frac{1}{\tanh(1/2\lambda)} - 2\lambda \right) \# 1/\tanh(x) = \coth(x)$$

**if**  $R_{\text{calc}} > R_{\text{Meas}}$  **then**

$$\lambda \leftarrow \lambda - \delta_\lambda$$

**else**

$$\lambda \leftarrow \lambda + \delta_\lambda$$

**end if**

$$\delta_\lambda \leftarrow \delta_\lambda / 2$$

**end for**

$$D_j \leftarrow \frac{\lambda}{T_0}$$

**end for**

**9** Calculate  $R_{Sj}$ :

**for all**  $D_j$  **do**

$$R_{Sj} \leftarrow \frac{k_B \cdot T}{6\pi \cdot \eta D_j}$$

**end for**

**S subroutines** The subroutines are exactly the same as for the calibration with  $V^{\text{hyd}}$ .

### Axis conversion of $t \longrightarrow D \longrightarrow R_S$ without calibration

#### Inputs:

- $t_j$
- void Peak  $t_{\text{void}}$
- elution flow  $\dot{V}_e$
- cross flow  $\dot{V}_c$
- relative focus  $z_{\%}$ ;
- $L_1, L_2, L_3$
- $b_0, b_L$

#### Outputs:

- $D_j$
- $R_{Sj}$

#### Temporary variables:

- $T_0$
- $\lambda$
- $\delta_\lambda$
- $R_{\text{meas}}, R_{\text{calc}}$
- $z_0$
- $L_{12}, L$
- $b_\Delta$
- $m_1, m_2, m_3$
- $t_2, t_3$
- $\alpha_2, \alpha_3$
- $\beta_1, \beta_2, \beta_3$
- $\gamma_2, \gamma_3$
- $\delta_1, \delta_2, \delta_3$
- $\Delta_2, \Delta_3$
- $C_{F1}, C_{F2}, C_{F3}, C_F$
- $T_1, T_2$
- channel width  $w$
- channel volume  $V^{\text{hyd}}$

#### Constants:

- $\lambda_{\min} \leftarrow 10^{-5}$
- $\lambda_{\max} \leftarrow 100$

#### Calculations:

**1-5** Same steps as for the calibration with  $V^{\text{hyd}}$  (gives  $C_F$ )

**6** Calculate  $w$ :

$$w \leftarrow \frac{t_{\text{void}}}{2 \cdot C_F}$$

**7** Calculate passed channel area  $A_z$ :

**if**  $z_0 \geq L_1$  **then**

$$A_z \leftarrow (L_{12} - z_0) \cdot (m_2(L_{12} + z_0) + t_2) + A_3$$

**else**

$$A_z \leftarrow m_1 \cdot (L_1^2 - z_0^2) + A_2 + A_3$$

**end if**

**8** Initialize  $\lambda$  and  $\delta_\lambda$ :

$$\lambda \leftarrow \frac{\lambda_{\min} + \lambda_{\max}}{2}$$

$$\delta_\lambda \leftarrow \frac{\lambda_{\max} - \lambda_{\min}}{4}$$

**9** Find such  $\lambda$  that  $|R_{\text{meas}} - R_{\text{calc}}| \stackrel{!}{=} \min$  by bisection and convert to  $D_j$ :

```

T0  $\leftarrow \frac{A_z}{V_c \cdot w}$ 
for all  $t_j > t_{\text{void}}$  do
   $R_{\text{meas}} \leftarrow \frac{t_{\text{void}}}{t_j}$ 
  for  $k \leftarrow 0$  to 50 do
     $R_{\text{meas}} \leftarrow 6\lambda \left( \frac{1}{\tanh(1/2\lambda)} - 2\lambda \right) \# 1/\tanh(x) = \coth(x)$ 
    if  $R_{\text{meas}} > R_{\text{meas}}$  then
       $\lambda \leftarrow \lambda - \delta_\lambda$ 
    else
       $\lambda \leftarrow \lambda + \delta_\lambda$ 
    end if
     $\delta_\lambda \leftarrow \delta_\lambda / 2$ 
  end for
   $D_j \leftarrow \frac{\lambda}{T_0}$ 
end for

```

**10** Calculate  $R_S$ :

```

for all  $D_j$  do
   $R_{Sj} \leftarrow \frac{k_B \cdot T}{6\pi \cdot \eta D_j}$ 
end for

```

## Complete data sets

### Detailed measurement method

#### Sequence order

3xBSA VC3

VC 3

VC 2

VC 1

VC 3

VC 2

VC 1

VC 3

VC 2

VC 1

Thyro

VC 1

VC 0.75

VC 0.5

VC 1

VC 0.75

VC 0.5

VC 1

VC 0.75

VC 0.5

## References

- [1] K.-G. Wahlund, *Journal of chromatography. A* **2013**, *1287*, 97–112.
- [2] E. Magnusson, A. Håkansson, J. Janiak, B. Bergenståhl, L. Nilsson, *Journal of chromatography. A* **2012**, *1253*, 127–133.
- [3] H. Bolinsson, Y. Lu, S. Hall, L. Nilsson, A. Hakansson, *Journal of chromatography. A* **2018**, *1533*, 155–163.
- [4] A. Håkansson, E. Magnusson, B. Bergenståhl, L. Nilsson, *Journal of chromatography. A* **2012**, *1253*, 120–126.
- [5] K. G. Wahlund, J. C. Giddings, *Anal Chem* **1987**, *59*, 1332–1339.
- [6] A. Litzén, K.-G. Wahlund, *Anal. Chem.* **1991**, *63*, (Ed.: P. A. Jansson), 1001–1007.
- [7] I. Bronstein, K. Semendjajew, G. Musiol, H. Mühlig in *Taschenbuch der Mathematik*, Harri Deutsch, **2008**, Chapter 21.7.1.2, p. 1077.
- [8] I. Bronstein, K. Semendjajew, G. Musiol, H. Mühlig in *Taschenbuch der Mathematik*, Harri Deutsch, **2008**, Chapter 21.7.1.2, p. 1076.
- [9] I. Bronstein, K. Semendjajew, G. Musiol, H. Mühlig in *Taschenbuch der Mathematik*, Harri Deutsch, **2008**, Chapter 21.7.1.3, p. 1078.