

CNN

Alok Yadav

# The CNN model, Step by Step

**STEP 1:** Convolution



**STEP 2:** Max Pooling





**STEP 3:** Flattening



**STEP 4:** Full Connection

# Simple Input Image - Happy Face

---

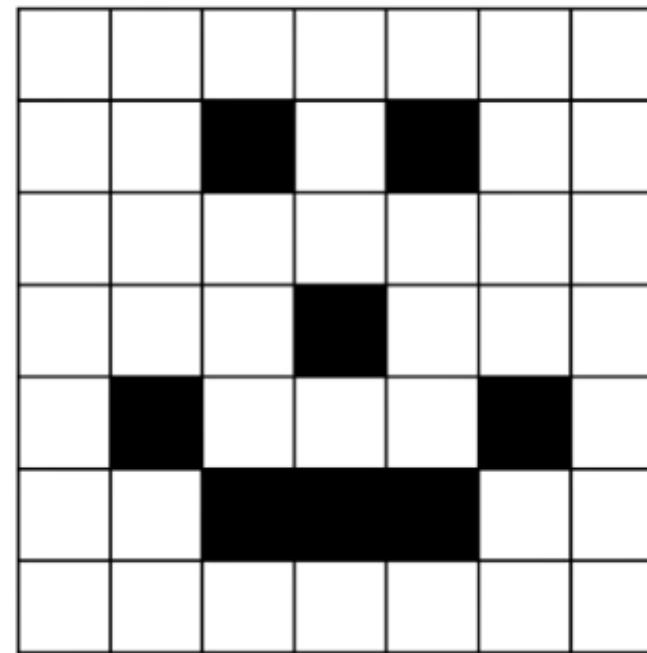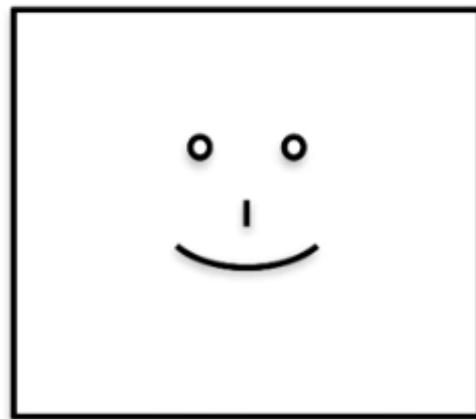

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0

To simplify, let's take a simple black and white image with 0 and 1 pixels

# Step 1 - Convolution

---

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0

Input Image

0	0	1
1	0	0
0	1	1

Feature Detector

# Step 1 - Convolution

---

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



0	0	1
1	0	0
0	1	1



0				

Input Image

Feature Detector

Feature Map

# Step 1 - Convolution

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



0	0	1
1	0	0
0	1	1

=

0	1			

Input Image

Feature Detector

Feature Map

# Step 1 - Convolution

---

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



0	0	1
1	0	0
0	1	1

=

0	1	0		

Input Image

Feature Detector

Feature Map

# Step 1 - Convolution

---

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0

Input Image



0	0	1
1	0	0
0	1	1

Feature Detector

=

0	1	0	0	

Feature Map

# Step 1 - Convolution

---

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



Input Image

0	0	1
1	0	0
0	1	1

Feature Detector

=

0	1	0	0	0

Feature Map

# Step 1 - Convolution

---

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



Input Image

0	0	1
1	0	0
0	1	1

Feature Detector

=

0	1	0	0	0
0				

Feature Map

# Step 1 - Convolution

---

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



0	0	1
1	0	0
0	1	1

=

0	1	0	0	0
0	1			

Input Image

Feature Detector

Feature Map

# Step 1 - Convolution

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0

Input Image



0	0	1
1	0	0
0	1	1

Feature Detector

=

0	1	0	0	0
0	1	1		

Feature Map

# Step 1 - Convolution

---

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



Input Image

0	0	1
1	0	0
0	1	1

Feature Detector



0	1	0	0	0
0	1	1	1	

Feature Map

# Step 1 - Convolution

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



0	0	1
1	0	0
0	1	1

=

0	1	0	0	0
0	1	1	1	0

Input Image

Feature Detector

Feature Map

# Step 1 - Convolution

---

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



Input Image

0	0	1
1	0	0
0	1	1

Feature Detector



0	1	0	0	0
0	1	1	1	0
1				

Feature Map

# Step 1 - Convolution

---

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



Input Image

0	0	1
1	0	0
0	1	1

Feature Detector

0	1	0	0	0
0	1	1	1	0
1	0			

Feature Map

# Step 1 - Convolution

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



0	0	1
1	0	0
0	1	1

=

0	1	0	0	0
0	1	1	1	0
1	0	1		

Input Image

Feature Detector

Feature Map

# Step 1 - Convolution

---

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



Input Image

0	0	1
1	0	0
0	1	1

Feature Detector



0	1	0	0	0
0	1	1	1	0
1	0	1	2	

Feature Map

# Step 1 - Convolution

---

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



0	0	1
1	0	0
0	1	1

=

0	1	0	0	0
0	1	1	1	0
1	0	1	2	1

Input Image

Feature Detector

Feature Map

# Step 1 - Convolution

---

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



0	0	1
1	0	0
0	1	1

=

0	1	0	0	0
0	1	1	1	0
1	0	1	2	1
1				

Input Image

Feature Detector

Feature Map

# Step 1 - Convolution

---

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



0	0	1
1	0	0
0	1	1

=

0	1	0	0	0
0	1	1	1	0
1	0	1	2	1
1	4			

Input Image

Feature Detector

Feature Map

# Step 1 - Convolution

---

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



0	0	1
1	0	0
0	1	1

=

0	1	0	0	0
0	1	1	1	0
1	0	1	2	1
1	4	2		

Input Image

Feature Detector

Feature Map

# Step 1 - Convolution

---

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



Input Image

0	0	1
1	0	0
0	1	1

Feature Detector



0	1	0	0	0
0	1	1	1	0
1	0	1	2	1
1	4	2	1	

Feature Map

# Step 1 - Convolution

---

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



Input Image

0	0	1
1	0	0
0	1	1

Feature Detector

0	1	0	0	0
0	1	1	1	0
1	0	1	2	1
1	4	2	1	0

Feature Map

# Step 1 - Convolution

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



0	0	1
1	0	0
0	1	1

=

0	1	0	0	0
0	1	1	1	0
1	0	1	2	1
1	4	2	1	0
0				

Input Image

Feature Detector

Feature Map

# Step 1 - Convolution

---

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



0	0	1
1	0	0
0	1	1

=

0	1	0	0	0
0	1	1	1	0
1	0	1	2	1
1	4	2	1	0
0	0			

Input Image

Feature Detector

Feature Map

# Step 1 - Convolution

---

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



0	0	1
1	0	0
0	1	1

=

0	1	0	0	0
0	1	1	1	0
1	0	1	2	1
1	4	2	1	0
0	0	1	2	

Input Image

Feature Detector

Feature Map

# Step 1 - Convolution

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



0	0	1
1	0	0
0	1	1

=

0	1	0	0	0
0	1	1	1	0
1	0	1	2	1
1	4	2	1	0
0	0	1		

Input Image

Feature Detector

Feature Map

# Step 1 - Convolution

---

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



0	0	1
1	0	0
0	1	1

=

0	1	0	0	0
0	1	1	1	0
1	0	1	2	1
1	4	2	1	0
0	0	1	2	1

Input Image

Feature Detector

Feature Map

# Step 1 - Convolution

---

0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0



0	0	1
1	0	0
0	1	1

=

0	1	0	0	0
0	1	1	1	0
1	0	1	2	1
1	4	2	1	0
0	0	1	2	1

Input Image


Feature Detector

Feature Map

# Step 1 - Convolution


0	0	0	0	0	0	0	0
0	1	0	0	0	1	0	0
0	0	0	0	0	0	0	0
0	0	0	1	0	0	0	0
0	1	0	0	0	1	0	0
0	0	1	1	1	0	0	0
0	0	0	0	0	0	0	0

We create many feature maps to obtain our first convolution layer

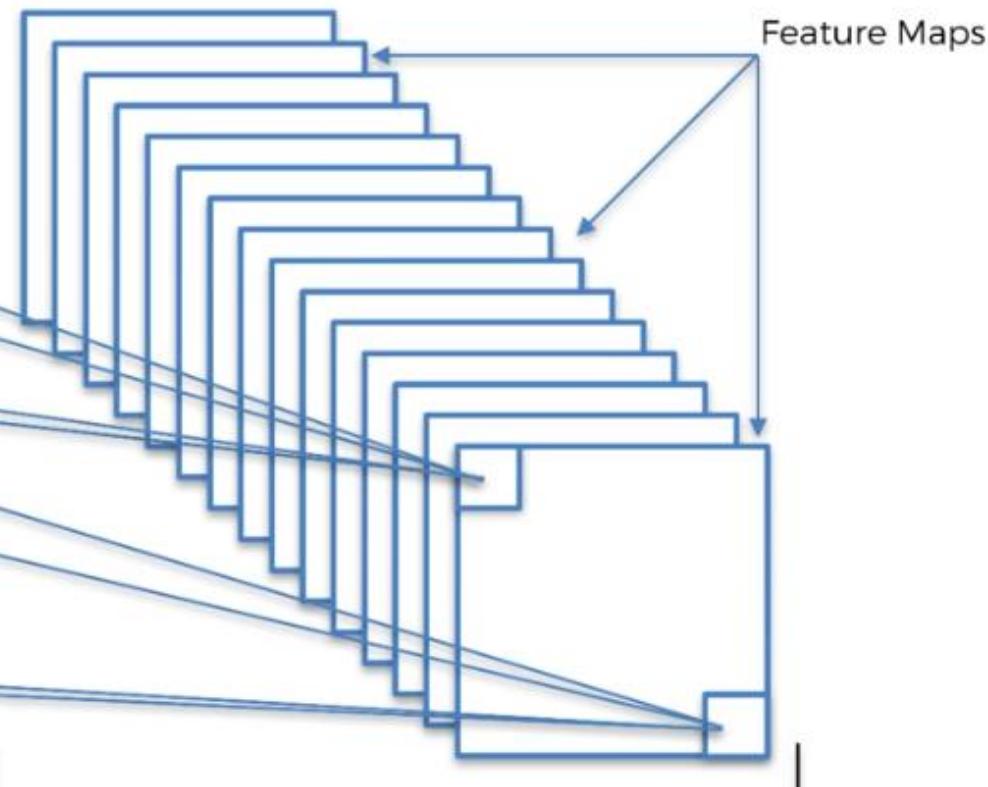

Convolutional Layer

# Input Images are converted into arrays

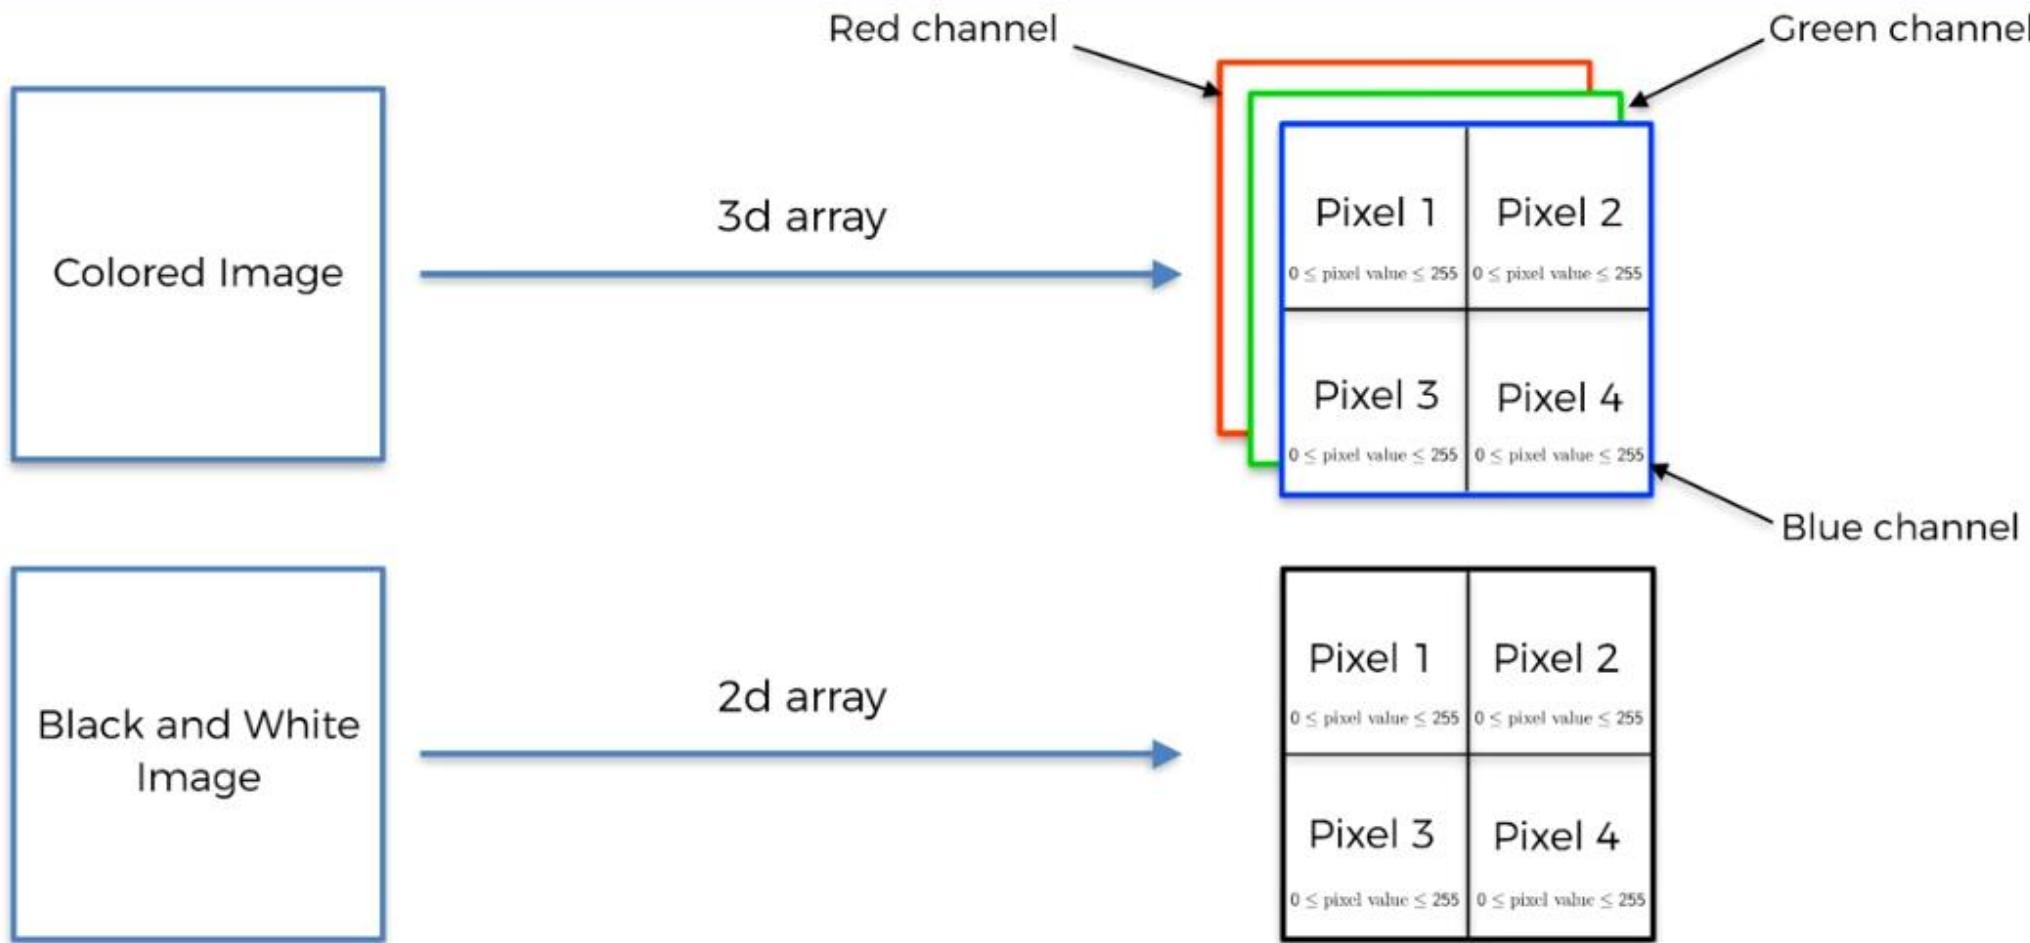

## Step 2 - Max Pooling

---

0	1	0	0	0
0	1	1	1	0
1	0	1	2	1
1	4	2	1	0
0	0	1	2	1

Feature Map

Max Pooling



1		

Pooled Feature Map

## Step 2 - Max Pooling

---

0	1	0	0	0
0	1	1	1	0
1	0	1	2	1
1	4	2	1	0
0	0	1	2	1

Feature Map

Max Pooling



1	1	

Pooled Feature Map

## Step 2 - Max Pooling

---

0	1	0	0	0
0	1	1	1	0
1	0	1	2	1
1	4	2	1	0
0	0	1	2	1

Feature Map

Max Pooling

1	1	0

Pooled Feature Map

## Step 2 - Max Pooling

---

0	1	0	0	0
0	1	1	1	0
1	0	1	2	1
1	4	2	1	0
0	0	1	2	1

Feature Map

Max Pooling



1	1	0
4		

Pooled Feature Map

## Step 2 - Max Pooling

---

0	1	0	0	0
0	1	1	1	0
1	0	1	2	1
1	4	2	1	0
0	0	1	2	1

Feature Map

Max Pooling  
→

1	1	0
4	2	

Pooled Feature Map

## Step 2 - Max Pooling

---

0	1	0	0	0
0	1	1	1	0
1	0	1	2	1
1	4	2	1	0
0	0	1	2	1

Feature Map

Max Pooling

1	1	0
4	2	1

Pooled Feature Map

## Step 2 - Max Pooling

0	1	0	0	0
0	1	1	1	0
1	0	1	2	1
1	4	2	1	0
0	0	1	2	1

Feature Map

Max Pooling



1	1	0
4	2	1
0		

Pooled Feature Map

## Step 2 - Max Pooling

---

0	1	0	0	0
0	1	1	1	0
1	0	1	2	1
1	4	2	1	0
0	0	1	2	1

Feature Map

Max Pooling




1	1	0
4	2	1
0	2	

Pooled Feature Map

## Step 2 - Max Pooling

---

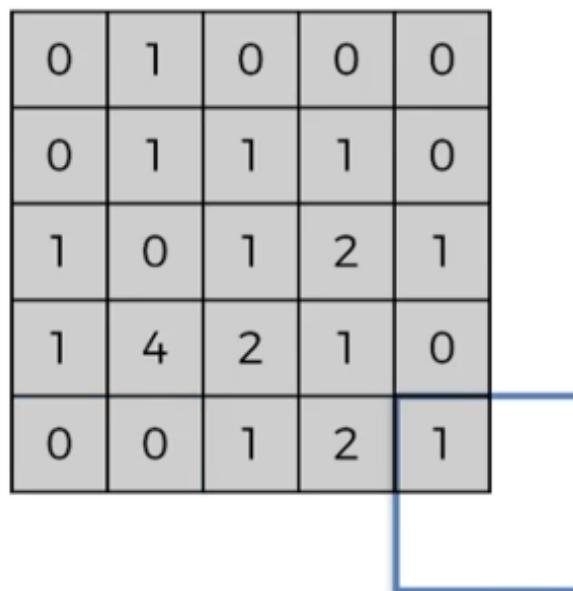

Feature Map

Max Pooling


1	1	0
4	2	1
0	2	1

Pooled Feature Map

## Step 2 - Max Pooling

0	0	0	0	0	0	0	0
0	1	0	0	0	1	0	0
0	0	0	0	0	0	0	0
0	0	0	1	0	0	0	0
0	1	0	0	0	1	0	0
0	0	1	1	1	0	0	0
0	0	0	0	0	0	0	0

Input Image

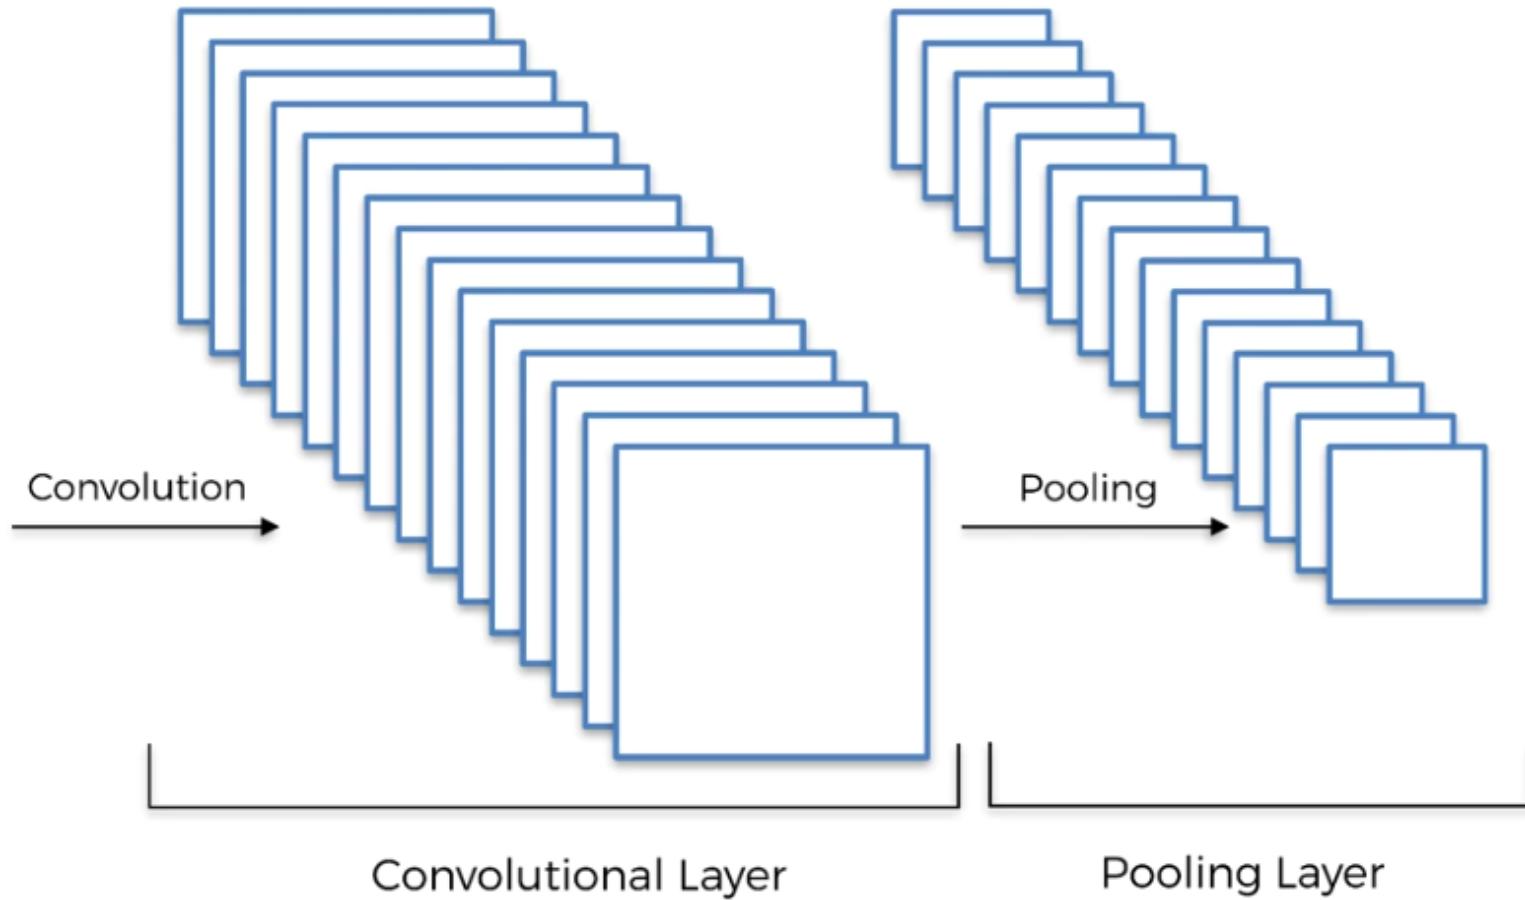

# The CNN model, Step by Step

---

**STEP 1:** Convolution



**STEP 2:** Max Pooling



**STEP 3:** Flattening



**STEP 4:** Full Connection

## Step 3 - Flattening

---

1	1	0
4	2	1
0	2	1

Pooled Feature Map


Flattening



1
1
0
4
2
1
0
2
1

## Step 3 - Flattening


---

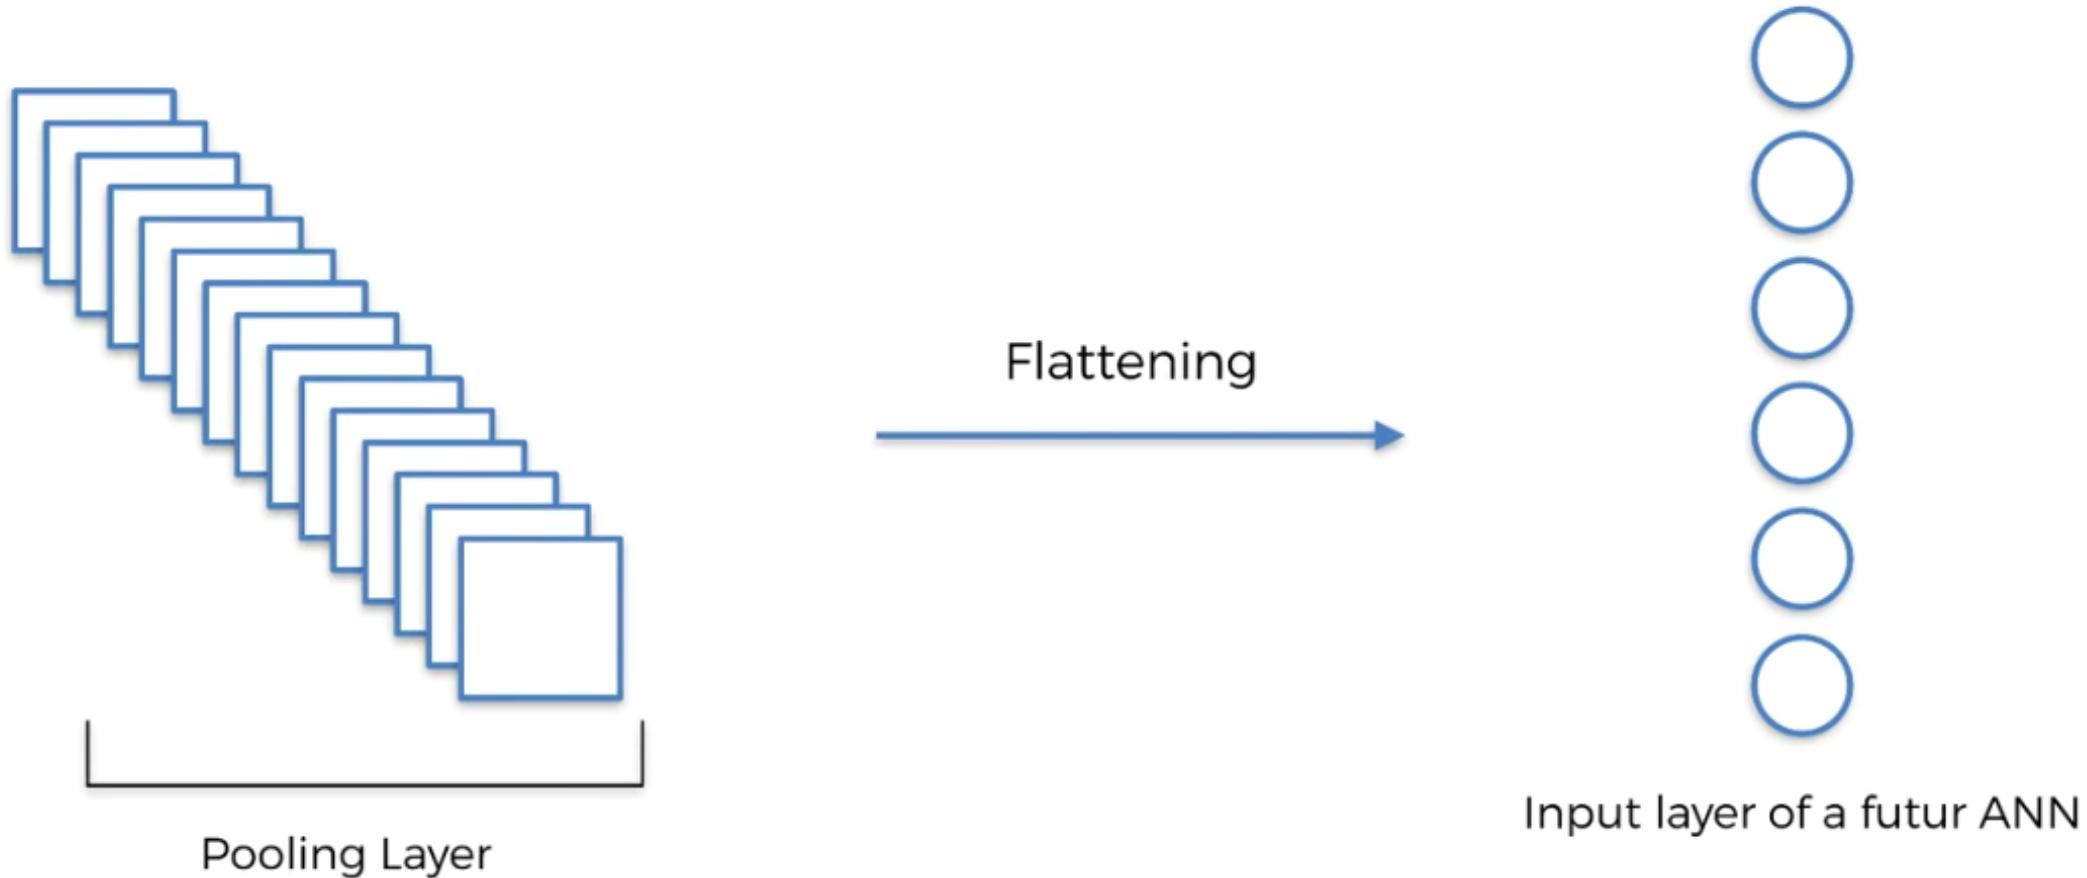

## Step 3 - Flattening


0	0	0	0	0	0	0
0	1	0	0	0	1	0
0	0	0	0	0	0	0
0	0	0	1	0	0	0
0	1	0	0	0	1	0
0	0	1	1	1	0	0
0	0	0	0	0	0	0

Input Image

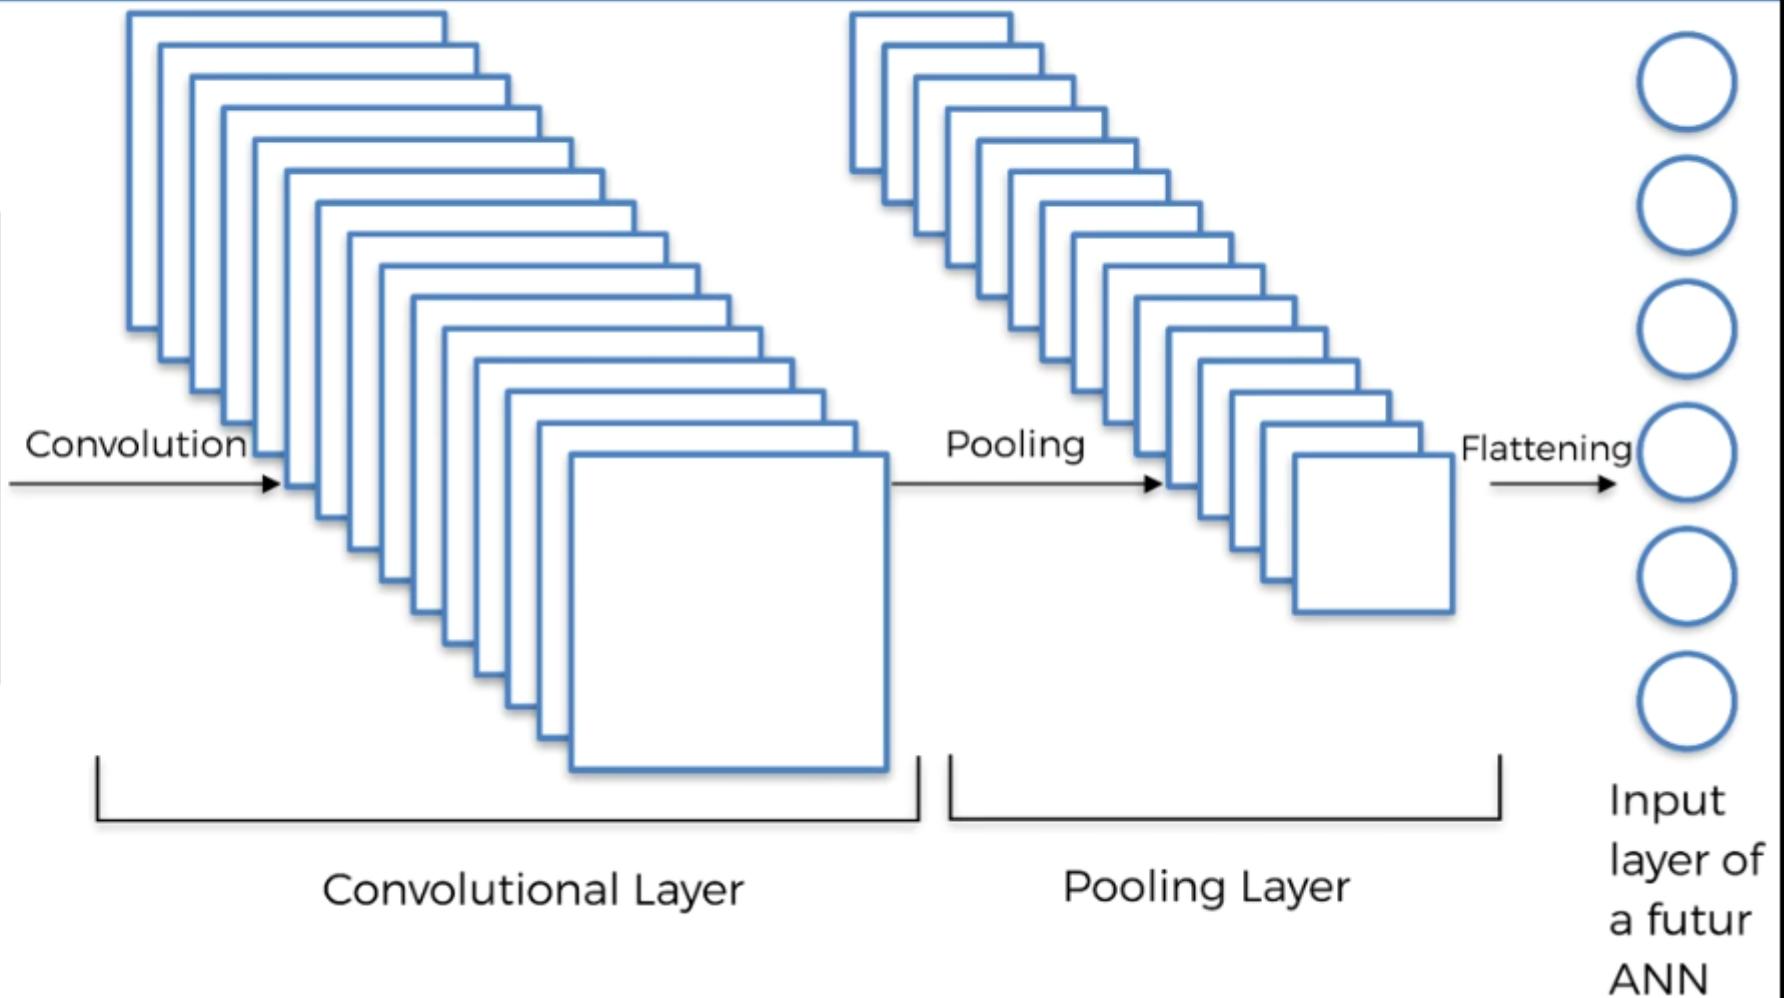


Input  
layer of  
a futur  
ANN


## Step 4 - Full Connection

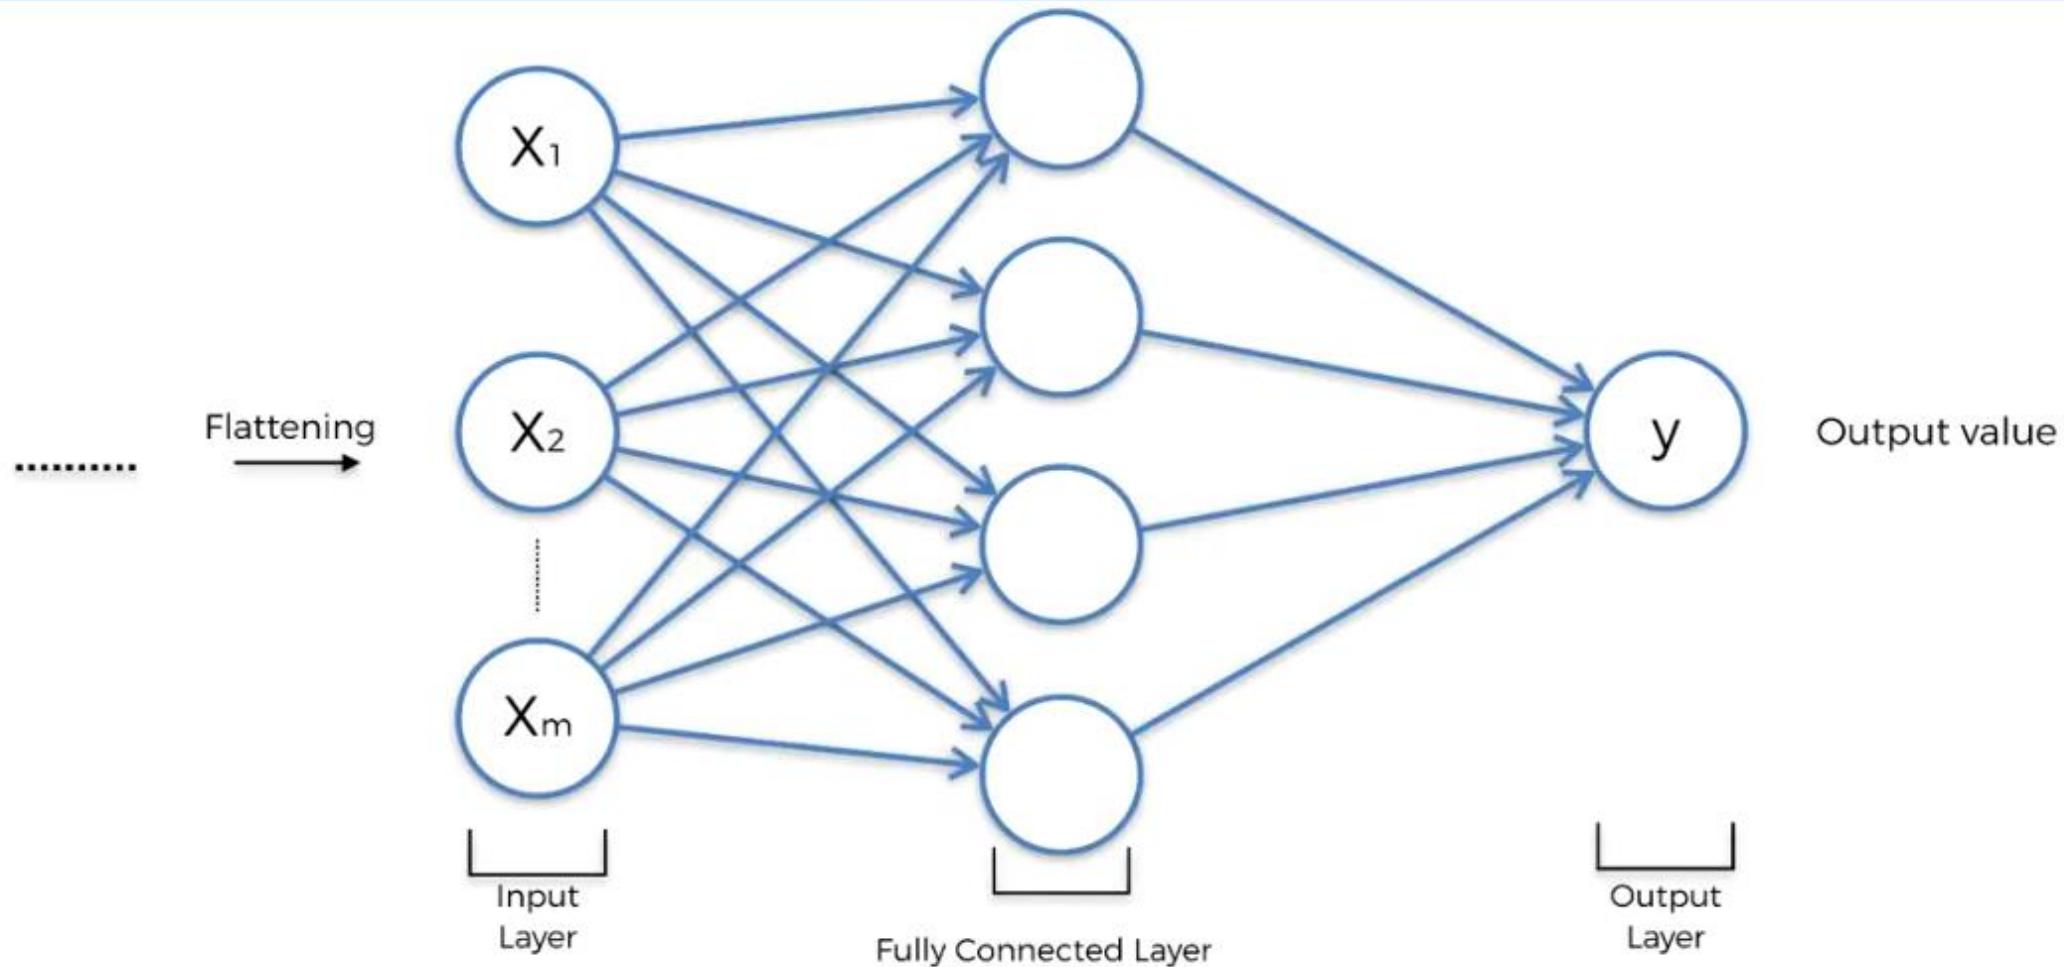

## Step 3 - Flattening

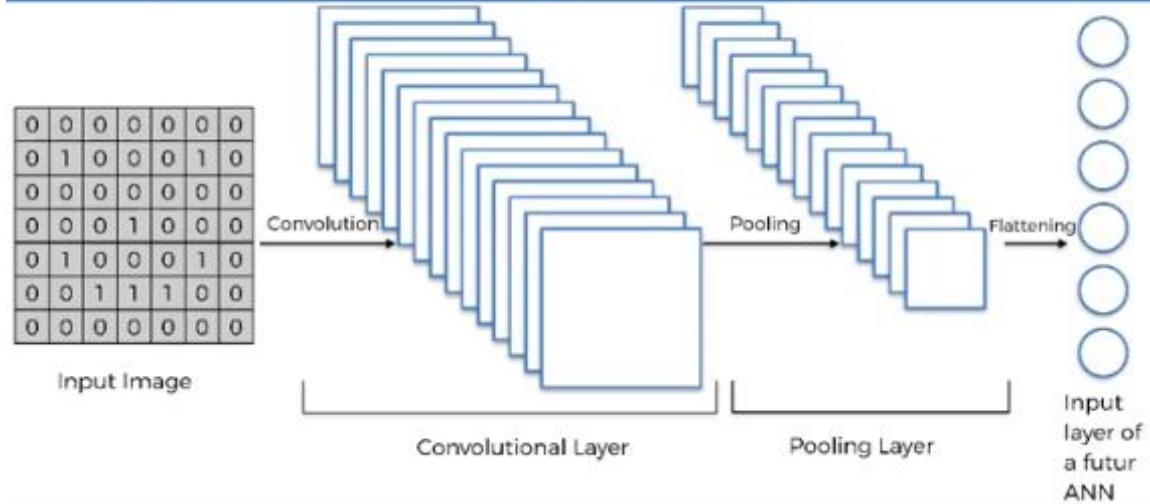

## Step 4 - Full Connection

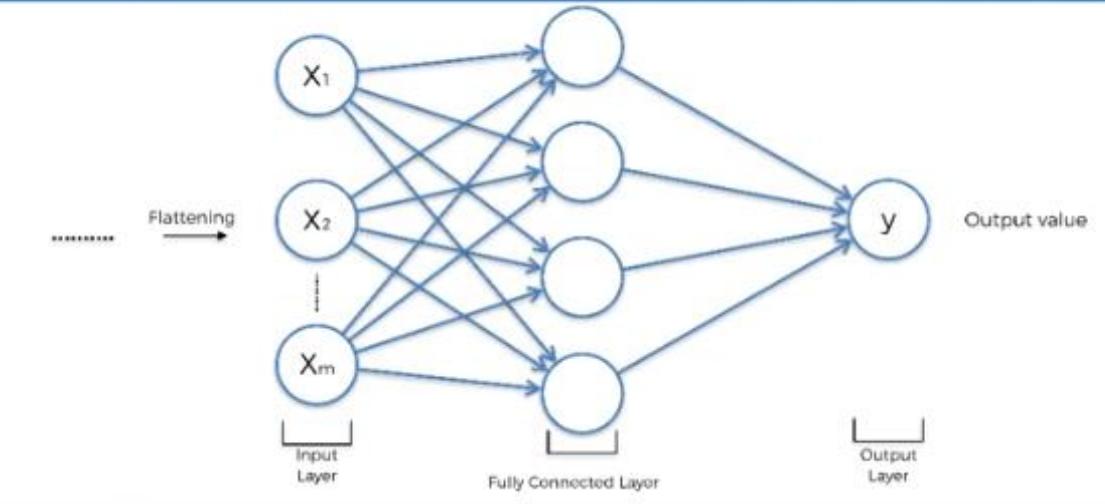

# The CNN model, Step by Step

---

**STEP 1:** Convolution



**STEP 2:** Max Pooling




**STEP 3:** Flattening



**STEP 4:** Full Connection

### Step 3 - Flattening

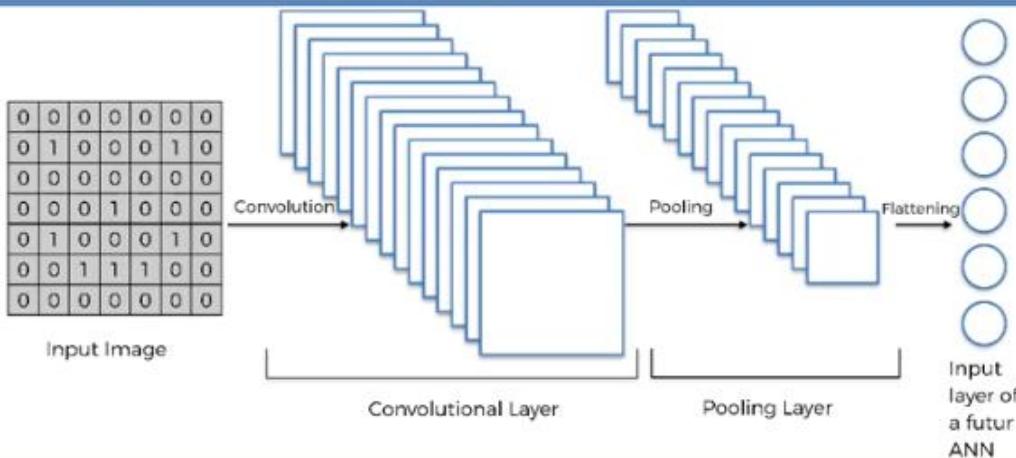

### Step 4 - Full Connection

