


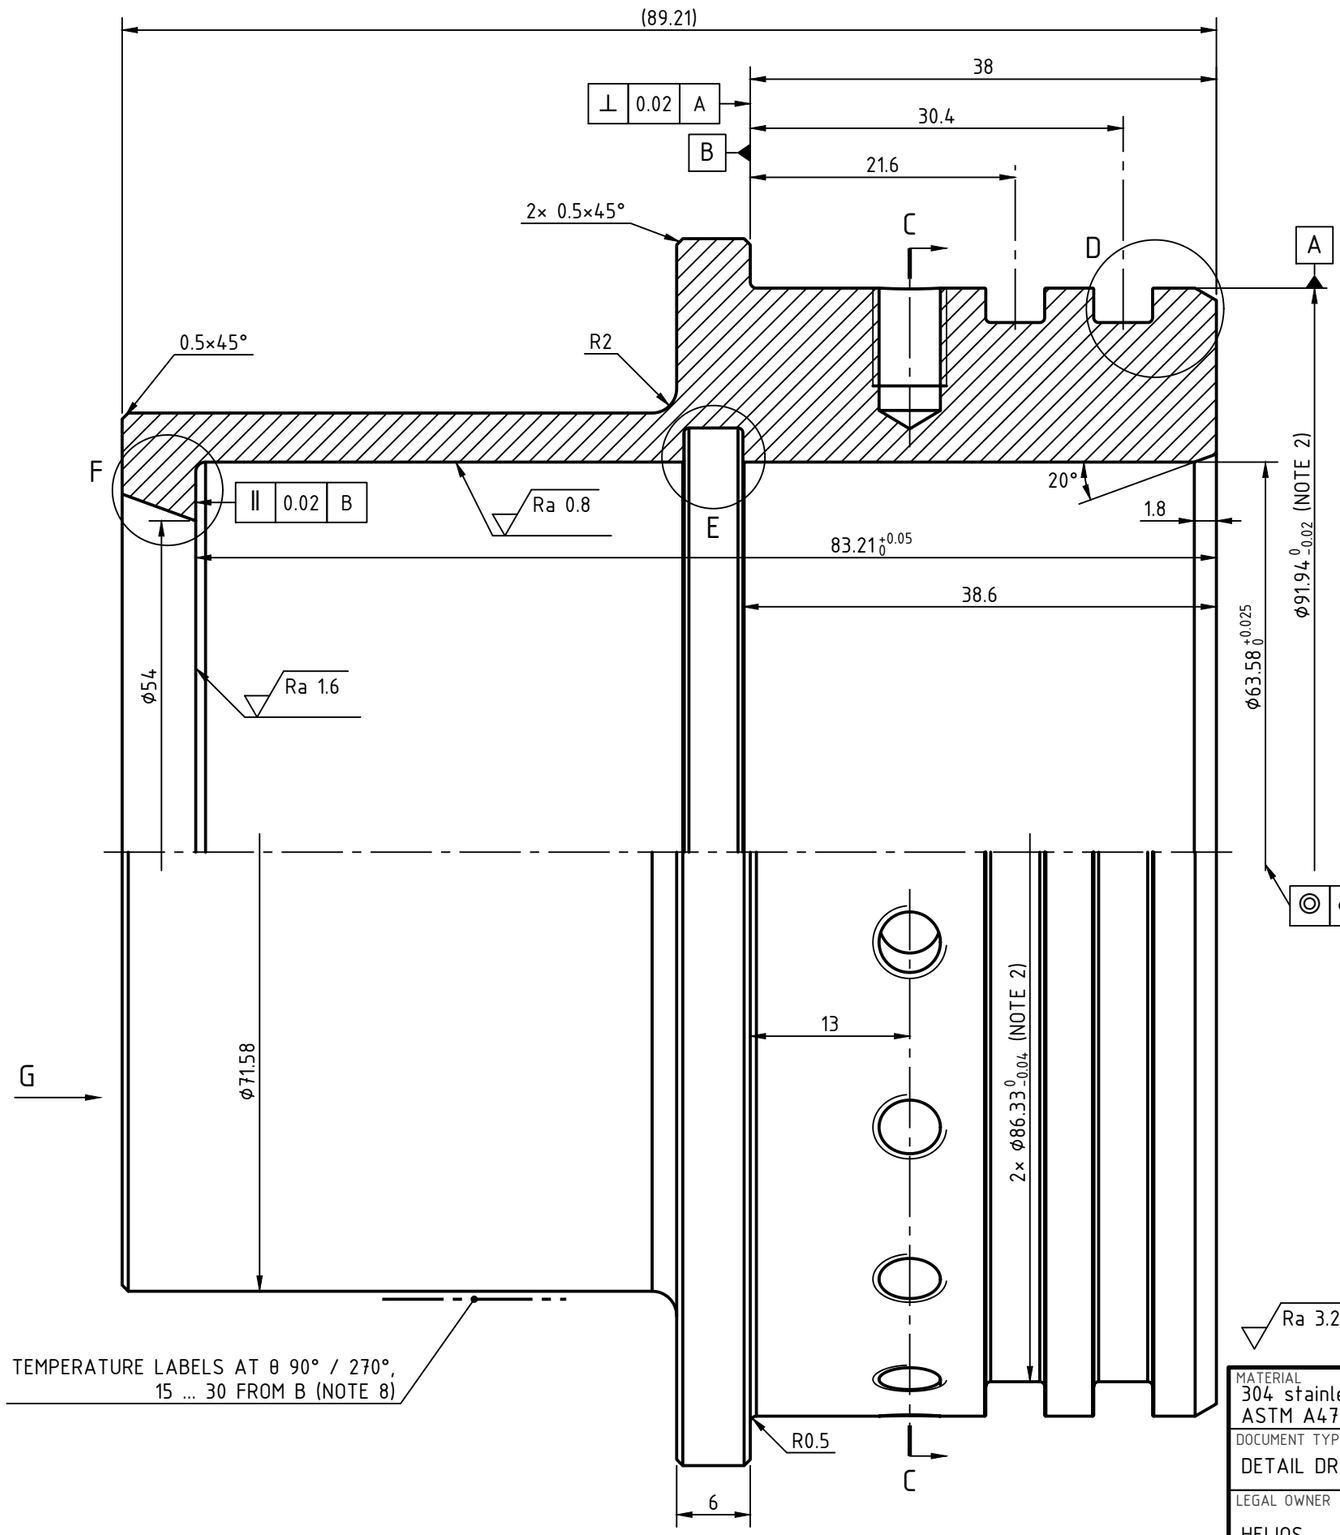


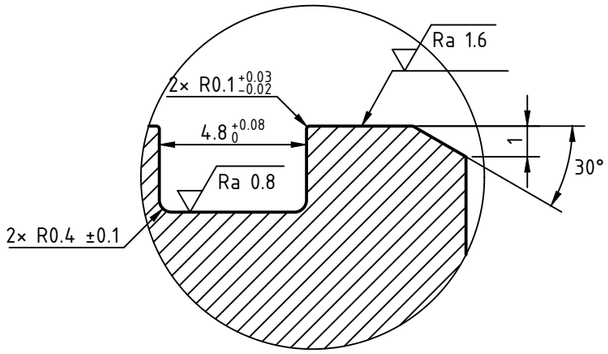

DETAIL D (5:1)
BOTH CASE GROOVES ALIKE, WALLS Ra 1.6



DETAIL E (5:1)
R0.4 AND R0.1 AS DETAIL D

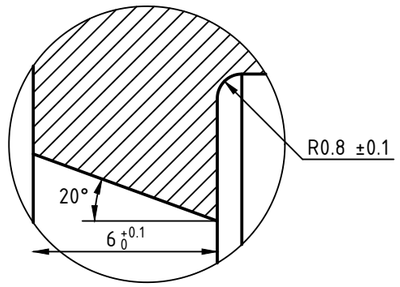

DETAIL F (5:1)

SEAL DIAMETERS FROM THE MEASURED CASE BORE A (NOTE 2)

FEATURE	CUT TO	A = 92.000 (DRAWN)	A = 92.070 (MAX)
Land (datum A)	A − 0.06 0/−0.02	ϕ91.94 0/−0.02	ϕ92.01 0/−0.02
Case grooves (2×)	A − 5.67 0/−0.04	ϕ86.33 0/−0.04	ϕ86.40 0/−0.04
Case bore A	recorded: _____	92.000	92.070

A = the smallest reading in the case's aft seal zone, honed and recorded on SRM100-101 (op 30, R4): 92.000 ≤ A ≤ 92.070; the zone is held to A +0.030/0, ≤ 92.10.

Upper half: section in the plane of hole 0 (θ 0.8°). SECTION C-C, VIEW G and the NOTES (for both sheets) are on sheet 2.

Ra 3.2 (✓)

USED ON: SRM100-000 item 2; SRM100-001 item 2

MATERIAL	MASS	GENERAL TOLERANCES	SURFACE TEXTURE	EDGES
304 stainless (1.4301) ASTM A479 annealed bar	1501.2 g	ISO 2768-mK	Ra 3.2	ISO 13715 −0.3 / +0.3

DOCUMENT TYPE	DOCUMENT STATUS	SCALE	PROJECTION	UNITS
DETAIL DRAWING	NOT CHECKED – FOR REVIEW	2:1		mm

LEGAL OWNER	TITLE, SUPPLEMENTARY TITLE
HELIOS SRM-100 SOLID ROCKET MOTOR	NOZZLE HOLDER Aft closure – 18× M6 radial – insert bore ϕ63.58

CREATED BY	APPROVED BY	DATE OF ISSUE	IDENTIFICATION NUMBER	REV	SHEET
text-to-cad / Claude	–	2026-09-23	SRM100-102	A	1 / 2