

USB-C plug, CC and ESD

Direct-attach device: Rd 5.1k on CC asks the host for 5 V. USBLC6 behind the plug, 22R near the module.

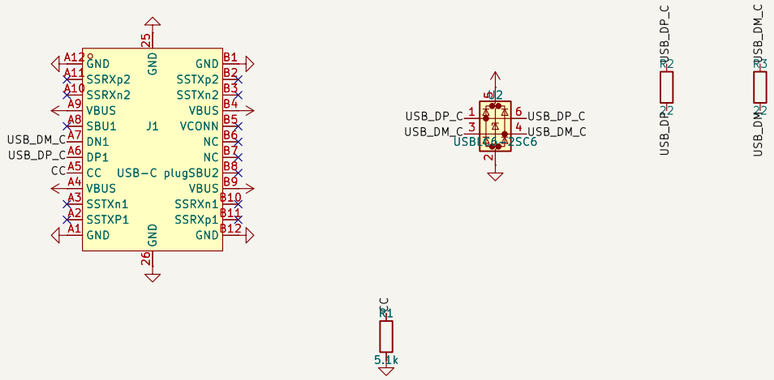


3.3 V supply

AP2112K-3.3: 600 mA for a 355 mA Wi-Fi peak. 4.7u + 100n in, 10u out, 4.7u + 100n at the module.



Ring power switch

GPIO7 high: Q2 pulls Q1 on. C16 holds it off at plug-in, R9/C16 soften the turn-on; R10 keeps it off until the firmware runs.

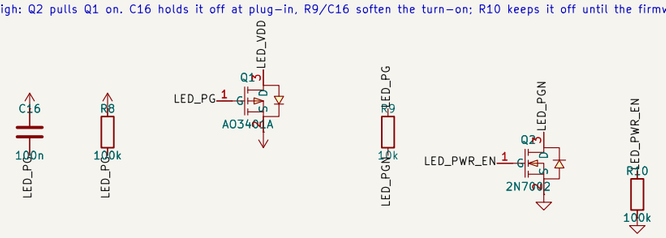


Power flags




ESP32-S3-MINI-1-N8


8 MB flash, no PSRAM. Antenna at the board end: no copper under it.

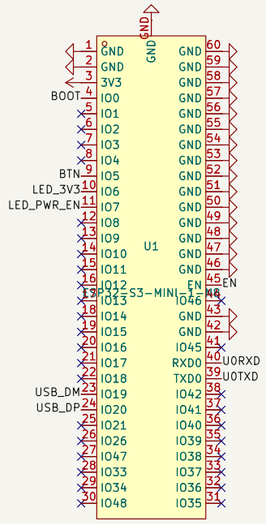

Status ring

8 x SK6805-EC20 on LED_VDD; SN74LV1T125 lifts GPIO6 to a 5 V data swing; 100n at each LED.

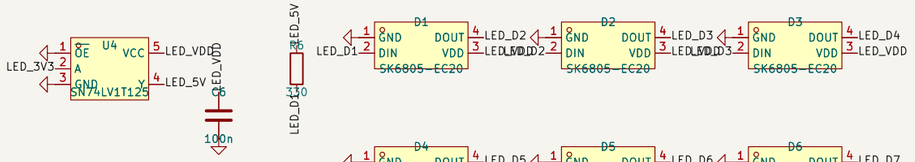

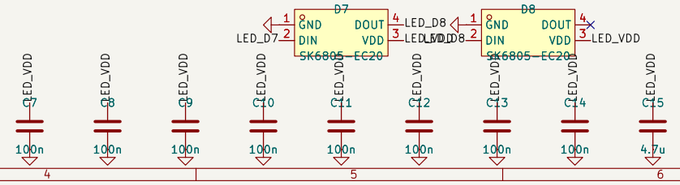

Confirmation button

GPIO5, active low, the chip's own pull-up. GPIO0 (BOOT) is only the bottom jumper.



Test points (bottom)

Bring-up and the UART console; JP1 shorted = download mode.





Generated by gen/make_sch.py from gen/design.py: edit those, not this file
USB-C stick: ESP32-S3-MINI-1-N8, one button, 8 LED ring
Keyra open hardware (MIT)

Sheet: /
File: keyra-stick.kicad_sch

Title: Keyra Stick

Size: A3	Date: 2026-11-03	**Rev: 1.0**
KiCad E.D.A. 10.0.7		Id: 1/1