


Work-Package 4: “Verification and Validation”

Preliminary safety Evaluation Criteria

Latex Document Draft

Jan Welte

May 2013
Revised June 2013

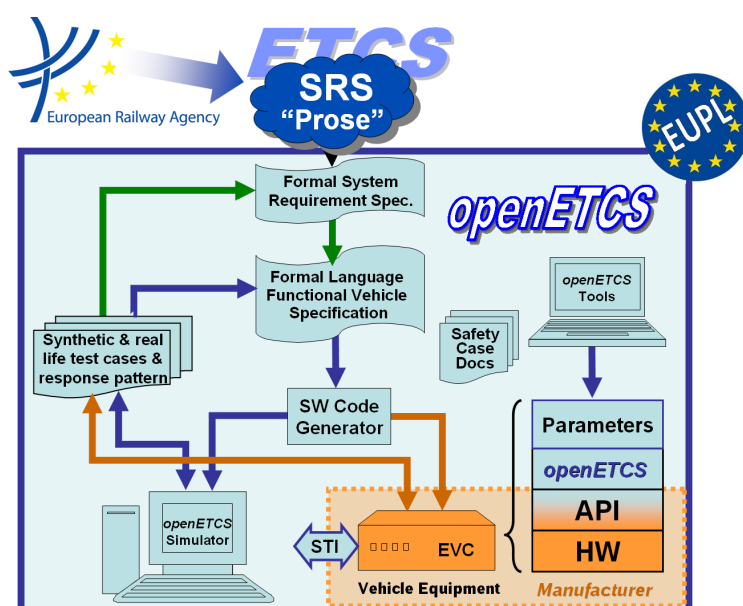

Funded by:



Federal Ministry
of Education
and Research

Région de
Bruxelles-
Capitale

MINISTERIO
DE INDUSTRIA, ENERGÍA
Y TURISMO

This page is intentionally left blank

Work-Package 4: “Verification and Validation”

OETCS/WP4/D4.4a

May 2013

Revised June 2013

Preliminary safety Evaluation Criteria

Latex Document Draft

Jan Welte

Technische Universität Braunschweig
Institute for Traffic Safety and Automation Engineering
Langer Kamp 8
38118 Braunschweig
Germany

Output for secondary tool evaluation

Prepared for openETCS@ITEA2 Project

Abstract: This document presents an overview of the safety related evaluation criteria used within the openETCS document structure and based on this derives evaluation criteria for the choice of suitable tools and methods for all safety activities which have to be performed during the openETCS development process. These criteria are based on the safety activities required in D2.6 and the general concept for an openETCS safety process.

Disclaimer: This work is licensed under the "openETCS Open License Terms" (oOLT) dual Licensing: European Union Public Licence (EURL v.1.1+) AND Creative Commons Attribution-ShareAlike 3.0 – (cc by-sa 3.0)

THE WORK IS PROVIDED UNDER openETCS OPEN LICENSE TERMS (oOLT) WHICH IS A DUAL LICENSE AGREEMENT INCLUDING THE TERMS OF THE EUROPEAN UNION PUBLIC LICENSE (VERSION 1.1 OR ANY LATER VERSION) AND THE TERMS OF THE CREATIVE COMMONS PUBLIC LICENSE ("CCPL"). THE WORK IS PROTECTED BY COPYRIGHT AND/OR OTHER APPLICABLE LAW. ANY USE OF THE WORK OTHER THAN AS AUTHORIZED UNDER THIS OLT LICENSE OR COPYRIGHT LAW IS PROHIBITED.

BY EXERCISING ANY RIGHTS TO THE WORK PROVIDED HERE, YOU ACCEPT AND AGREE TO BE BOUND BY THE TERMS OF THIS LICENSE. TO THE EXTENT THIS LICENSE MAY BE CONSIDERED TO BE A CONTRACT, THE LICENSOR GRANTS YOU THE RIGHTS CONTAINED HERE IN CONSIDERATION OF YOUR ACCEPTANCE OF SUCH TERMS AND CONDITIONS.

<http://creativecommons.org/licenses/by-sa/3.0/>
<http://joinup.ec.europa.eu/software/page/eupl/licence-eupl>

Table of Contents

1	Safety Process	5
1.1	Safety artifacts	5
1.2	Safety activities	6
1.3	OpenETCS safety process.....	6
1.4	Safety process supporting tools	8
2	Evaluation Criteria.....	8
2.1	Safety Process.....	10
2.2	Supporting tools	10
3	Conclusion	13
	References	13

Figures and Tables

Figures

Figure 1. Risk-Genesis-Model showing the relations between the safety-related terms [2]	5
Figure 2. OpenETCS Safety Process	8

Tables

Table 1. Safety Activities and their inputs and outputs	7
Table 2. Main openETCS safety process artifacts	9
Table 3. Main openETCS safety process activities	9
Table 4. CENELEC Safety Process Requirements	10
Table 5. Supporting tools and associated evaluation criteria	11

1 Safety Process

The EN50128 standard defines safety as the “freedom from unacceptable levels of risk of harm to people” [1], which shows that the safety approach required by the CENELEC standards is risk-based. As the risk is defined as the “combination of the rate of occurrence of accidents and incidents resulting in harm (caused by a hazard) and the degree of severity of that harm” [1] this approach is based on a probabilistic understanding of event occurrence. The overall relations between all these safety-related terms used to define the safety characteristics and the properties are demonstrated by the Risk-Genesis-Model of Schnieder, which is shown in the following figure 1.

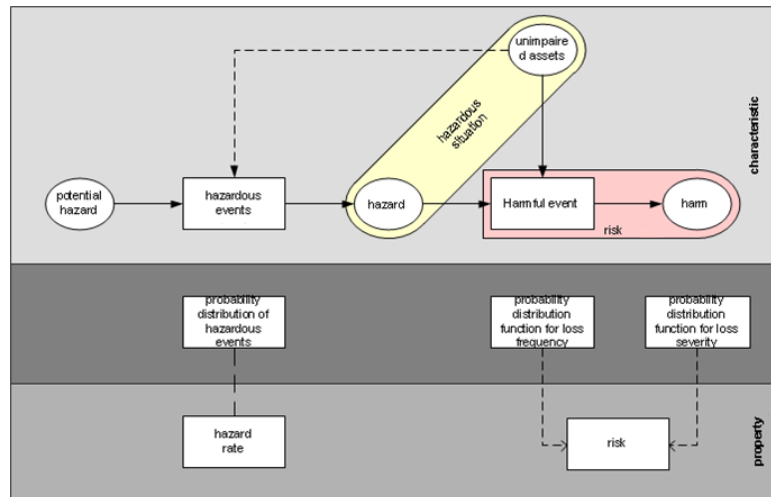


Figure 1. Risk-Genesis-Model showing the relations between the safety-related terms [2]

This demonstrates that the first step is to define the system characteristics of a system identifying the harms and their related hazardous situations. This has to be performed during a system hazard analysis. Afterwards the specific properties of this characteristics have to be defined by assessing the risk concerning the identified hazards. Based on this work safety integrity levels can be determined for all safety functionalities which are then allocated during the design to certain safety-related systems. As this work is closely related to all design decisions, it has to be specified for all abstraction levels during the system design. This leads to safety requirements which have to be implemented in the software design and verified, as well as validated specifically on system level.

Respectively the EN50126 describes the safety process as a series of safety tasks for each life cycle phase. This task are related to a number of safety artifacts which are created, used and adapted over time by different safety activities.

1.1 Safety artifacts

Since all safety activities are based on the system development activities all system design artifacts are part of the safety process. Therefore, the following design artifacts of the CENELEC standard development process build the basis for all safety artifacts:

- System Concept
- System Requirements Specification
- Software Requirement Specification

- Software Architecture Specification
- Software Design Specification
- Software Module Design Specification
- Software Source Code

The main safety artifacts are those which are set-up to build the reference for the safety-related aspect during the system development, which are continuously evolved during the design phases. Correspondingly the safety process has to create artifacts to demonstrate that all safety and quality-related requirements included in the system design. Respectively the following artifacts are created during the safety process:

- System Safety Plan
- Software Quality Assurance Plan
- Hazard Log
- System Safety Requirement Specification
- Safety Case

These artifacts have to be managed over the development process. Since all safety requirements have to be verified and validated there is likewise a close to all Test and Validation Reports.

1.2 Safety activities

The safety activities set-up or evolve the safety artifacts in relation to the different design artifacts. Respectively, every activity has certain input and output artifacts as defined in table 1:

Overall the safety activities have to be performed in close relation to the overall verification and validation activities as these have to verify and validate all safety requirements and their results become part of the safety plan.

1.3 OpenETCS safety process

The presented CENELEC standard safety artifacts and activities are always related to the overall system development. Since the openETCS development process just describes the development of the on-board unit software for ETCS additional system informations are needed for the openETCS safety process. These are mainly the following two parts of the CCS TSI:

- UNISIG SUBSET-026 System Requirements Specification (Version 3.3.0)
- UNISIG SUBSET-091 Safety Requirements for the Technical Interoperability of ETCS in Levels 1 and 2 (Version 3.2.0)

In relation to SUBSET-91 further documents should be considered:

Table 1. Safety Activities and their inputs and outputs

Safety Activity	Input Artifact(s)	Output Artifact(s)
Preliminary Hazard Analysis	System Concept	Safety Plan
System Hazard and Safety Risk Analysis	System Concept and Description	Hazard Log
Risk Assessment	System Concept and Description + Hazard Log	Hazard Log
Specification of System Safety Requirements	System Requirements Specification + Hazard Log	System Safety Requirement Specifications
Define Safety Acceptance Criteria	Hazard Log	Safety Plan
Define Safety Related Functional Requirements	System Safety Requirement Specifications	System Requirements Specification
Specify Sub-System and Component Safety requirements	System Requirements Specification + System Safety Requirement Specification	System Safety Plan + System Requirements Specification + System Safety Requirement Specification
Implement Safety Plan	Safety Plan	Hazard Log + Safety Case
Validate System Safety Requirements	System Safety Requirements	Safety Case

- Part of TSI Annex A
 - SUBSET-036
 - SUBSET-037
 - SUBSET-040
 - SUBSET-041
 - SUBSET-098
- Not part of TSI Annex A
 - SUBSET-039
 - SUBSET-078
 - SUBSET-079
 - SUBSET-080
 - SUBSET-081
 - SUBSET-088

From these documents the Preliminary Hazard Analysis and the System Safety Goals have to be derived which are needed as the starting point for the openETCS safety process. Based on these information a subsystem hazard and risk analysis for the openETCS scope can be performed which set-up the openETCS hazard log. Based on these results the openETCS safety requirements will be specified, which are then further developed to functional requirements. During the development these requirements are adopted if necessary for the different abstraction

levels from the high level model down to the source code. This is done using corresponding safety backlogs, which are the reference for the safety requirement verification. Altogether the source code has to be validated against all safety requirements to demonstrate, that the software can not cause any harm. The safety case has to present all needed documentation.

The main task of the openETCS safety process concerning the interactions with the development process are shown in figure 2.

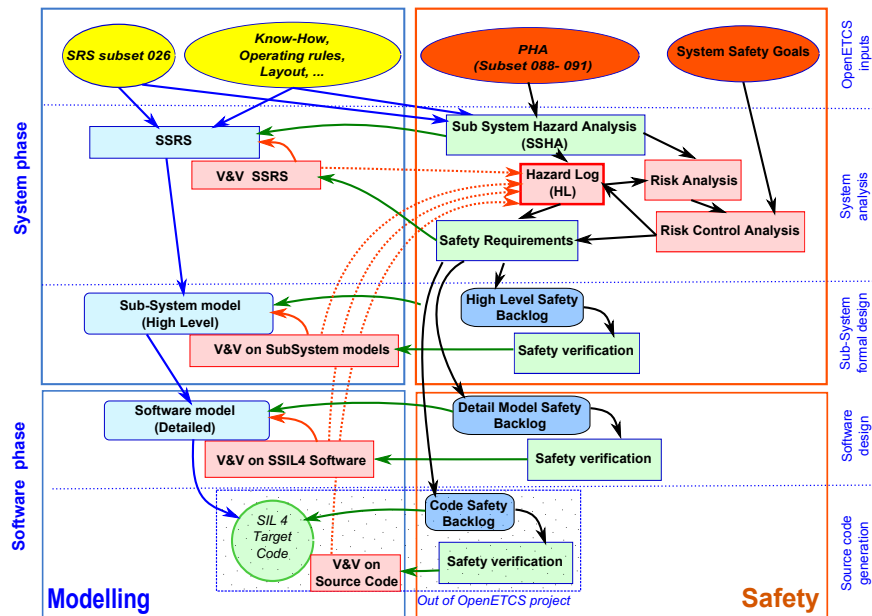


Figure 2. OpenETCS Safety Process

The openETCS safety process will be specified more detailed in the safety plan. Correspondingly, the main safety artifacts and safety activities which have to be handled during the openETCS safety process are shown in table 2 and 3.

1.4 Safety process supporting tools

Supporting software tools are needed to handle the safety artifacts and to some degree to more efficiently perform the safety activities. As some safety artifacts like the safety requirement specifications and the safety backlogs are closely related to design artifacts the same tools can be used. Especially all requirements should be handled by one tool to ensure full traceability and provide one main interface for the verification and validation activities.

Depending on the methods used for hazard and risk analysis appropriate tools are needed to perform the analysis, collect the hazards and associated risks in the hazard log and to evaluated possible risk control measures. Thereby, traceability has to be guaranteed between all activities.

Since the safety plan and safety case provide the basis for the safety approval the tools used to generated these artifacts should help to generate a consistent argumentation and efficiently collect the data needed to provide evidence. Respectively, interfaces to manage documents and automatically generate reports would be helpful functionalities.

Table 2. Main openETCS safety process artifacts

Abbreviation	Safety Artifact	Degree of Formalisation
Safety Req	Safety Requirements: list of all requirements which have to be respected during the system development to reach the safety goals	Informal/ Semi-Formal / Formal
HL	Hazard Log: List of identified hazards and its associated risk classification as well as information concerning the risk control	Informal
SP	Safety Plan: Document which specifies all activities, resources and events to ensure that the source code will satisfy all relevant safety requirements	Informal
SC	Safety Case: Documentation which demonstrates that the used development process and the resulting source code fulfil all safety requirements	Informal
CSB	Code Safety Backlog: list of requirements/ properties to be implemented inside the dM derived from the HL (and the dMSB)	Semi-Formal/ Strictly-Formal
dMSB	Detailed Model Safety Backlog: list of requirements/ properties to be implemented inside the dM derived from the HL (and the hLSB)	Semi-Formal/ Strictly-Formal
hLSB	High Level Safety Backlog: list of requirements/ properties to be implemented inside the hM derived from the HL	Informal/ Semi-Formal

Table 3. Main openETCS safety process activities

Safety Activity	Input Artifact(s)	Output Artifact(s)
Preliminary Hazard Analysis (PHA)	Mainly SUBSET-91	Safety Plan + Safety Goals
Sub-System Hazard and Risk Analysis (SSHA)	Mainly SSRS + Safety Goals	Hazard Log
Specification of Sub-System Safety Requirements	SUBSET-26 + SUBSET-91 + Hazard Log	Safety Requirement Specifications
Define Safety Acceptance Criteria	Hazard Log	Safety Plan
Update Hazard Log	Verification Reports + Test Cases	Hazard Log
Specify functional and model specific Requirements	SSRS + Safety Requirement Specification	Safety Plan + Model Backlogs
Verify Safety Requirements	Models + Safety Requirements + Model Backlogs	Verification Report + Safety Case
Validate Safety Requirements	Source Code + Safety Requirements	Validation Report + Safety Case

2 Evaluation Criteria

The safety process has to ensure and demonstrated that the development process in general and the specific source code provide adequate protection against all relevant hazards. Therefore the safety process and the supporting tools have to be linked to the development process and especially the requirement handling and verification and validation activities. Thereby traceability between safety artifacts and design artifacts is the main issue.

2.1 Safety Process

The safety process and the resulting documentation constitute the main documents for the system approval, as it is required by European and national law to do everything reasonable expectable to prevent harm. Accordingly the CENELEC standards build the common technical rules for the development process. The Common Safety Methods present a concept based on the EN50126 how the risk evaluation and management has to be performed.

Therefore the main references concerning the safety process are the CENELEC standards, mainly the EN50126 on how the safety aspects have to be handled as part of the RAMS management over the development process. The overall risk evaluation concept is also defined at this point. The specific concerning the safety case preparations are defined in the EN50129 including the Safety Integrity Level concept.

Therefore the overall safety management process has to be followed during the openETCS project, as far as it is concerning the scope of openETCS. Therefore the following table 4 presents a first list of relevant requirements:

Table 4. CENELEC Safety Process Requirements

Standard	Section	Titel
EN 50126	4	Railway RAMS
EN 50126	6	RAMS lifecycle
EN 50128	Table A.3	Software Error Effect Analysis
EN 50129	5.3	Evidence of safety management
EN 50129	Annex A	Safety Integrity Levels
EN 50129	Annex B	Detailed technical requirements

2.2 Supporting tools

All tasks of the safety process have to be supported by suitable tools, which are able to handle the artifacts. As the openETCS project wants to use FLOSS tools, this is also one important evaluation criteria for all tools of the safety process. As it has been demonstrated in subsection 1.2 most safety activities have to deal with in- and output from design artifacts, therefore the tools shall be able to interact with those data formats chosen for the specific design artifacts. Overall the safety process tools should be integrated into the tool chain as far as possible.

In addition some tools needed to support the safety process basically provide the same functionality as it is used during the design or the verification and validation process. If there is no specific need to use different tools to avoid common failures, the same tools shall be used for the same functionalities to reduce interfaces.

Table 5 gives an overview about the needed supporting tools and the main evaluation criteria for each of the tools.

Table 5. Supporting tools and associated evaluation criteria

Evaluation Criteria	Description	Evaluation Criteria
Text Editor	Editor to write mainly textual documents e.g. Safety Plan,	<ul style="list-style-type: none"> • Usability • Open formats • Tool chain integration
Modelling (and Analysis) tool for top-down Hazard Analysis	To identify potential hazards a top-down system analysis will be performed. To do this methods like FTA or STAMP use different kinds of modelling tools to systematically identify hazards in the system structure and behaviour. To efficiently use this methods a modelling editor with limited functionalities to analyse the model is needed.	<ul style="list-style-type: none"> • Simple Usability • Modelling (and Analysis) functionality depending on method • Vertical tool chain integration (import system information/export hazard information) • Traceability to SRS and SSRS
Modelling (and Analysis) tool for bottom-up Hazard and Risk Analysis	To identify potential hazards and to estimate the risk a bottom-up system analysis will be performed. To do this methods like FMEA or HAZOP use different kinds of systematic approaches to evaluated the system structure and its behaviour. To efficiently use this methods a modelling editor with limited functionalities to analyse the model is needed.	<ul style="list-style-type: none"> • Simple Usability • Modelling (and Analysis) functionality depending on method • Vertical tool chain integration (import system information/export hazard and risk information) • Traceability to SRS and SSRS

Fortsetzung auf der nächsten Seite

Evaluation Criteria	Description	Evaluation Criteria
Database for Hazard Log	The hazard log is the central artifact to collect all identified hazards and their associated risks as well as potential risk control measures. A database tool is needed to store these hazards while providing the needed traceability information to retrace their correct identification and evaluation.	<ul style="list-style-type: none"> • Simple Usability • Proper Versioning system • Easy ability for Queries • Horizontal tool chain integration • Traceability to Hazard and Risk Analysis and Safety Requirements • Generation of documentation
Database for Safety Requirements	As the safety requirements have to be defined based on the risk control measures chosen based on the hazard and risk analysis, these have to be stored and handled as all other requirements.	<ul style="list-style-type: none"> • Simple Usability • Proper Versioning system • Easy ability for Queries • Horizontal and vertical tool chain integration • Traceability to Hazard Log, all design, verification and validation artifacts • Generation of documentation
Tools for safety requirement verification and validation	Tools equivalent to verification and validation tools to handle the safety requirements	<ul style="list-style-type: none"> • Simple usability • Efficient performance • Vertical tool chain integration • Traceability to safety requirements • Ability to provide T2 (or T3) tool qualification • Automatic generation of documentation

Fortsetzung auf der nächsten Seite

Evaluation Criteria	Description	Evaluation Criteria
Safety Case management tool	To develop and manage the safety case over time from the generic concept to the specific documentation a tool is needed. This tool has to help to develop a consistent generic argumentation chain and to link this to the actual documents. Thereby the information concerning the documents should be provided mostly automatically to avoid inconsistencies.	<ul style="list-style-type: none"> • Simple Usability • Modelling functionality for safety case structure • Linking to versioning and configuration systems • Automatic document generation

3 Conclusion

This document presents a general overview about the safety process as it will be implemented in the openETCS project and which references have to be respected. This plan will be developed further in the actual safety plan. As most safety activities are closely related to design, verification and validation activities more details will be defined as these processes are refined.

Based on this safety process concept evaluation criteria mainly for the needed supporting tools are defined, which shall build the basis for a first tool evaluation. These criteria have to be defined more specific with respect to the overall tool chain development taking the specific data formats and tool interfaces into account.

References

- [1] EN50128: Railway applications - communications, signalling and processing systems - software for railway control and protection systems, 2011.
- [2] Lars Schnieder. *Formalisierte Terminologien technischer Systeme und ihrer Zuverlässigkeit*. PhD thesis, Technische Universität Braunschweig, Braunschweig, 2010.