



Power Input Connector & Filter

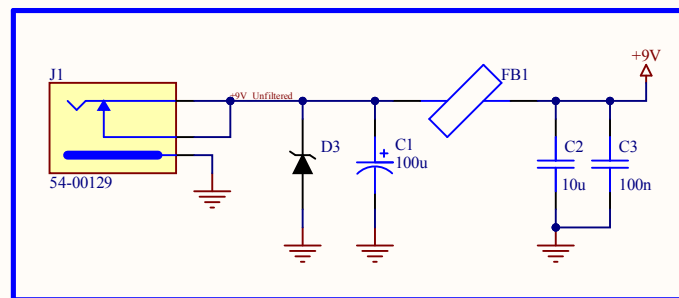


⚠ Pi filter to ensure that any high frequencies do not contaminate the power rails. 100uF for current spikes, 10uF and 100nF help filter out any lingering high frequencies.

4.5V DV Bias

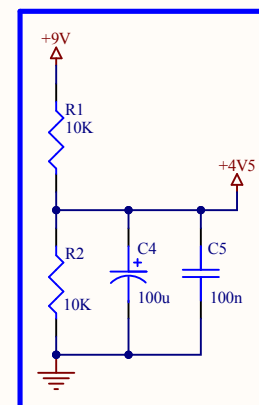

⚠ 100uF and 100nF help clean up the 4.5V bias power rail. 10K ohm resistors limit thermal noise, we want to limit voltage noise.

Indicator LEDs

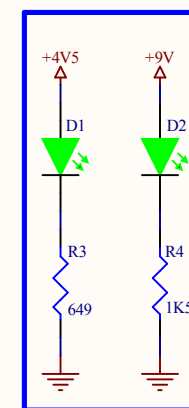

Title		
Size A4	Number	Revision
Date: 10/03/2026	Sheet of	
File: C:\pcb\...\Power.SchDoc	Drawn By:	