




Fiddler Set Up

1. Download Fiddler from <http://www.telerik.com/download/fiddler>
2. Install Fiddler on a machine which is on the same domain and network as that of the mobile device.
3. Click Tools > Fiddler Options > Connections.
4. Click the checkbox by Allow remote computers to connect.

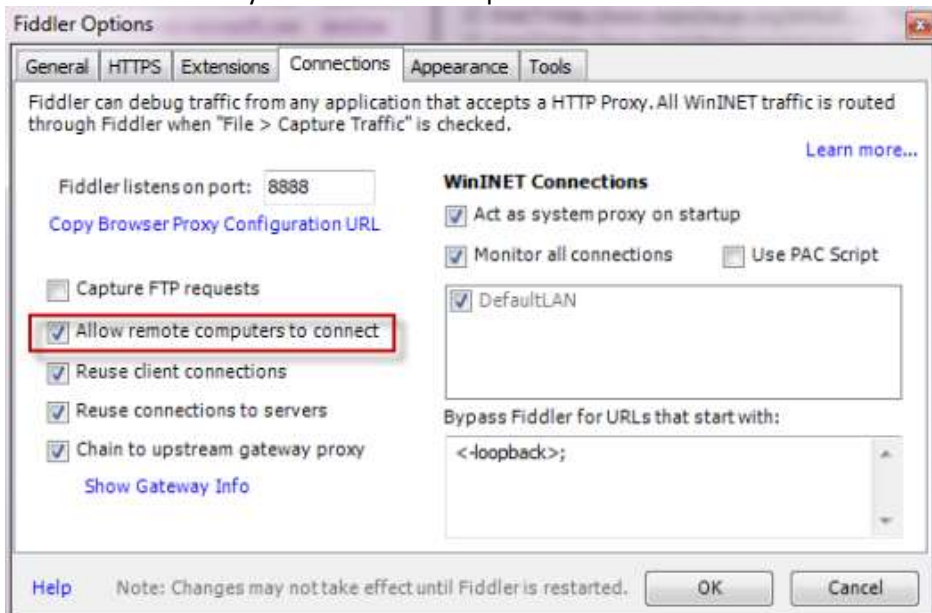

4. Now, go to the HTTPS tab and enable Decrypt HTTPS Traffic option
5. Restart Fiddler.
6. Ensure your firewall allows incoming connections to the Fiddler process.
7. Find the IP for the network that both devices are connected on (for ease make sure it's the same network)
 - a. One way to do this Hover over the Online indicator at the far right of the Fiddler toolbar to display the IP addresses assigned to Fiddler's machine.
 - b. Another is to go to wifi find the connection that both devices are connected on:
 - i. Click "properties"
 - ii. Scroll to the bottom where the network properties are listed
 - iii. Find the listing for "IPv4 address"

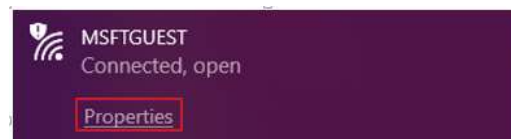

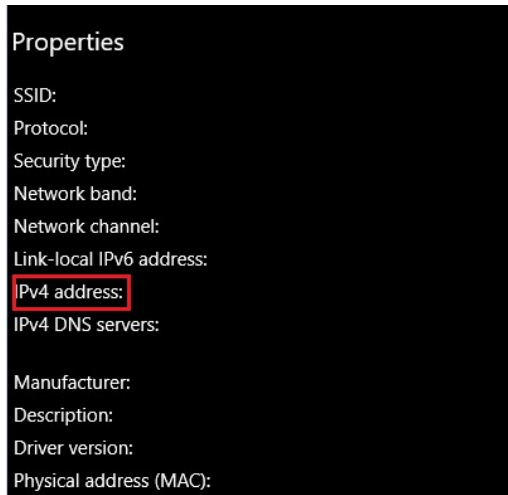

7. Verify client iOS device can reach Fiddler by navigating in the browser to <http://FiddlerMachineIP:8888>. This address should return the Fiddler Echo Service page.
 - a. Fiddler needs to be capturing for this to work.
 - i. If Fiddle is not already capturing traffic, enable it by selecting File menu -> Capture Traffic and ensuring it's checked (alternatively you can also enable by hitting F12 or clicking on the lower left corner).
 - b. Replace the "*FiddlerMachineIP*" with the IP you located above. (for example <http://123.45.67.89:8888>)
8. For iPhone: Disable the 3g/4g connection.

iOS set up

1. Before proceeding with these steps please confirm that you are getting the splash page when performing step 7 above
2. To allow for HTTPS decryption we need to install Fiddler's certificate on the device this can be downloaded from the splash page when clicking the "FiddlerRoot certificate" link
 - a. This step will need to be performed from Safari. From our testing and research, it seems that Apple only allows installation of certificates from Safari.
 - b. For more information on Fiddler's certificate please see their documentation <https://docs.telerik.com/fiddler/Configure-Fiddler/Tasks/ConfigureForiOS>



Fiddler Echo Service

```
GET / HTTP/1.1
Host: 10.106.198.68:8888
Upgrade-Insecure-Requests: 1
Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8
User-Agent: Mozilla/5.0 (iPhone; CPU iPhone OS 12_2 like Mac OS X) AppleWebKit/605.1.15 (KHTML, like Gecko) Version/12.1
Accept-Language: en-us
Accept-Encoding: gzip, deflate
Connection: keep-alive
```

This page returned a **HTTP/200** response

- To configure Fiddler as a reverse proxy instead of seeing this page, see [Reverse Proxy Setup](#)
- You can download the [FiddlerRoot certificate](#)

3. After clicking you will get a prompt on whether you would like to allow the installation of the "Profile". Select allow. Once installed you will get a second prompt notifying that the profile has been downloaded. This however does not mean that we have finished setting up the certificate

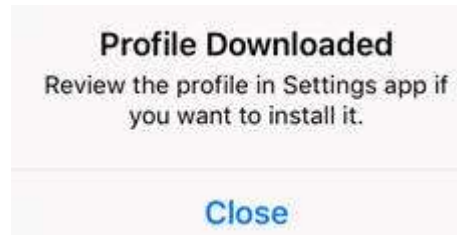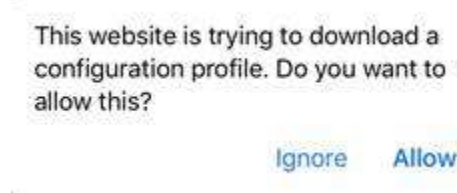

4. Next go to Settings -> General -> Profile Management
 - a. Here you should see in the list an option under Downloaded Profile section "DO_NOT_TRUST_FiddlerRoot". Select this to navigate to the install pane.



5. After opening the profile click the Install button located in the top right.
 - a. Once it's installed you should see the Not verified section below turn to a green "Verified" with a check mark and the title of the section should change from "Install Profile" to just "Profile"





6. The final step to allow for https decryption, go to settings -> general -> about -> Certificate Trust -> settings and enable "DO_NOT_TRUST_FiddlerRoot" option



7. Now that we have HTTPS decryption set up change the wifi to use Fiddler as a proxy
 - a. Go to settings -> wifi and select the information option next to the wifi that we are using




8. At the bottom select to configure proxy. Once the page for Configure Proxy comes up choose Manual and enter :
 - a. In Server enter -> <IP that we used in first section step 7>
 - b. In port enter -> 8888




Data Collection

1. Before starting prep both the mobile device and the "proxy" machine for collection.
 - a. To try and minimize the data we capture please try to close out of all applications on both the proxy machine and mobile device that are not needed for the repro.
 - b. If there are any other tabs that are open, please close out of these
2. Clear the browser cache
 - a. Go to Settings -> Privacy -> Clear browsing data and make sure the following are checked:

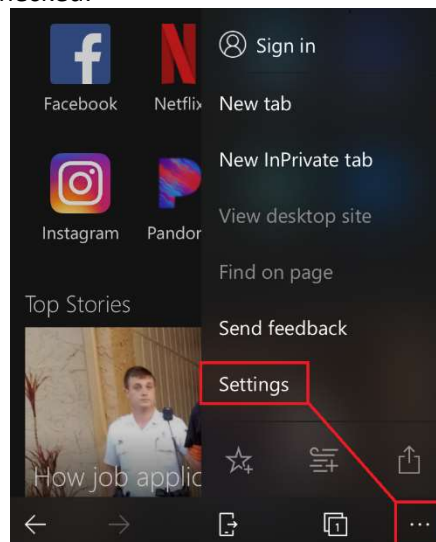

- i. Cookies and site data
- ii. Cache
- iii. Form Data

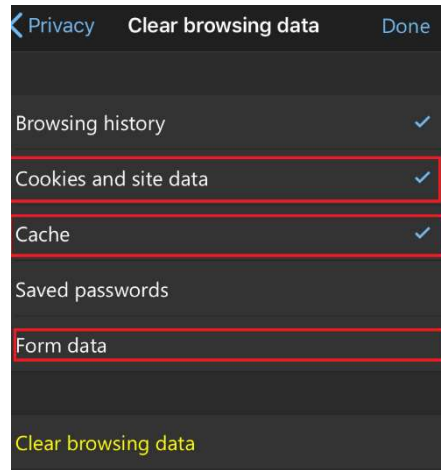

- b. Once checked click the button to clear browsing data
1. Now that we have the environments set for collection, start capturing traffic in fiddler
 - a. If you had Fiddler capturing traffic during the set-up phase, please clear out any traffic not related to the issue at this time.
 - b. If Fiddle is not already capturing traffic, enable it by selecting File menu -> Capture Traffic and ensuring it's checked (alternatively you can also enable by hitting F12 or clicking on the lower left corner).
2. Perform the steps necessary to reproduce the issue
3. Once finished, stop capturing traffic by repeating the above step
4. Save all sessions by selecting File menu -> Save -> All sessions...

How to Uninstall Fiddler Certificate once finished

1. Go back to where we installed the Fiddler profile/certificate (Settings -> General -> Profile Management)
 - a. Select "DO_NOT_TRUST_FiddlerRoot"
2. Once inside the detail view for the profile press the Remove Profile button at the bottom