


5 V harness: J_OUT (Micro-Fit 3.0, 4 ckt) -> Raspberry Pi 5 GPIO header [RC2 - terminal and wire part numbers to be confirmed]

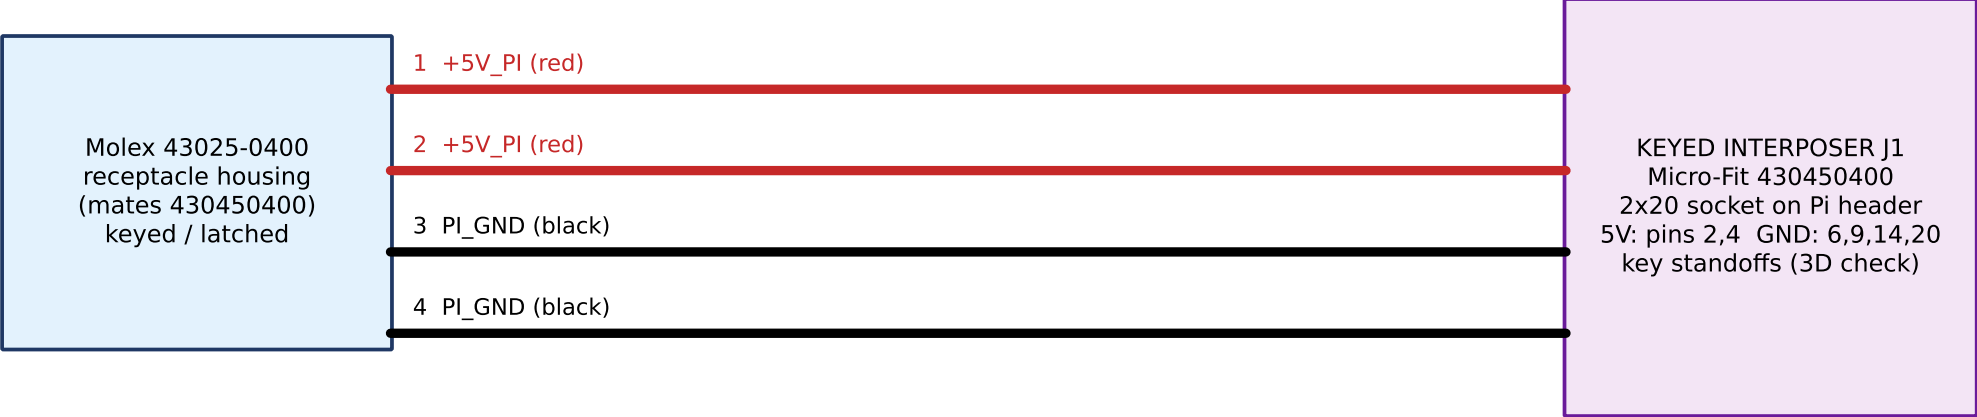

Wire: 16 AWG stranded silicone preferred (18 AWG min), length <= 150 mm, twisted pairs per rail.
16 AWG 1:1 to the interposer, 43025-0400 housings both ends (Molex 43030 terminals - confirm AWG range).
Circuit 1+2 = +5 V pair (outer row), 3+4 = GND pair (inner row) - Molex dual-row numbering runs along rows.
Key: housing is polarised - cannot be mated backwards. Mark pin 1 on harness label.
PI USB-C must not be connected to any power source when this harness is fitted.