


5 V harness: J_OUT (Micro-Fit 3.0, 4 ckt) -> Raspberry Pi 5 GPIO header [RC1 - verify all part numbers]

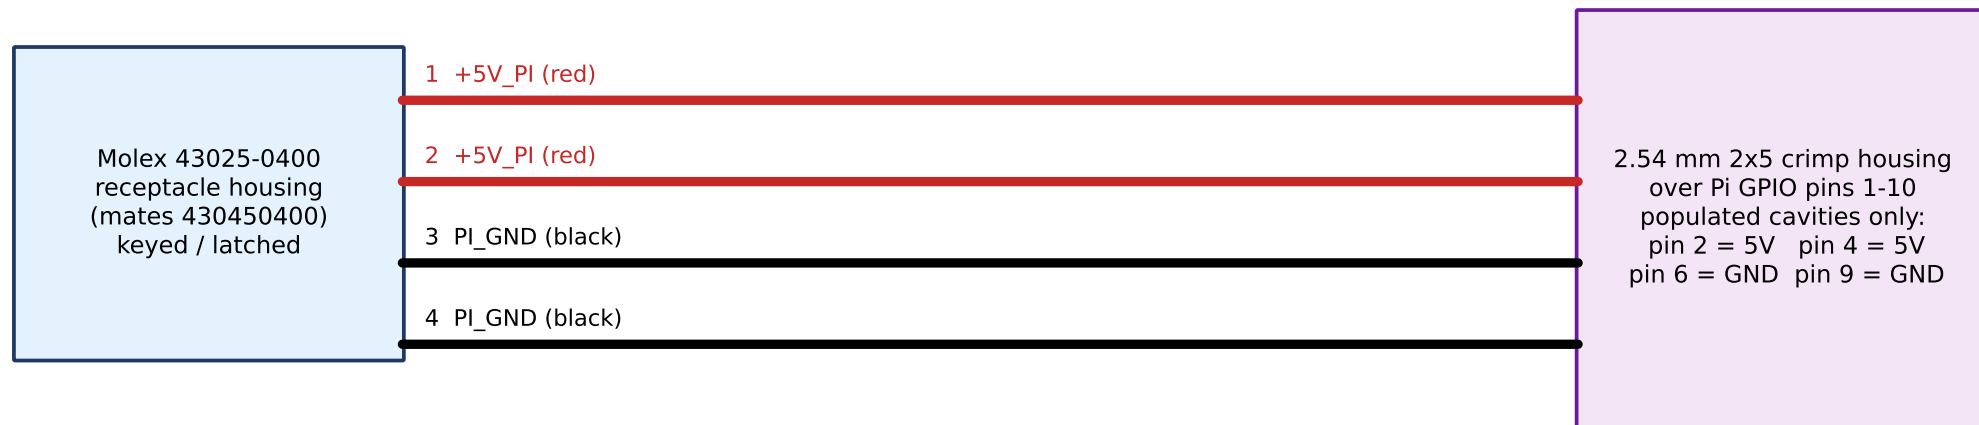

Wire: 16 AWG stranded silicone preferred (18 AWG min), length $\leq$ 150 mm, twisted pairs per rail.

Terminals: Molex 43030 family crimp (candidate 43030-0007; confirm AWG range / current rating).

Circuit 1+2 = +5 V pair (outer row), 3+4 = GND pair (inner row) - Molex dual-row numbering runs along rows.

Key: housing is polarised - cannot be mated backwards. Mark pin 1 on harness label.

PI USB-C must not be connected to any power source when this harness is fitted.