


## 5 V harness: J\_OUT (Micro-Fit 3.0, 4 ckt) -> Raspberry Pi 5 GPIO header [RC1 - verify all part numbers]

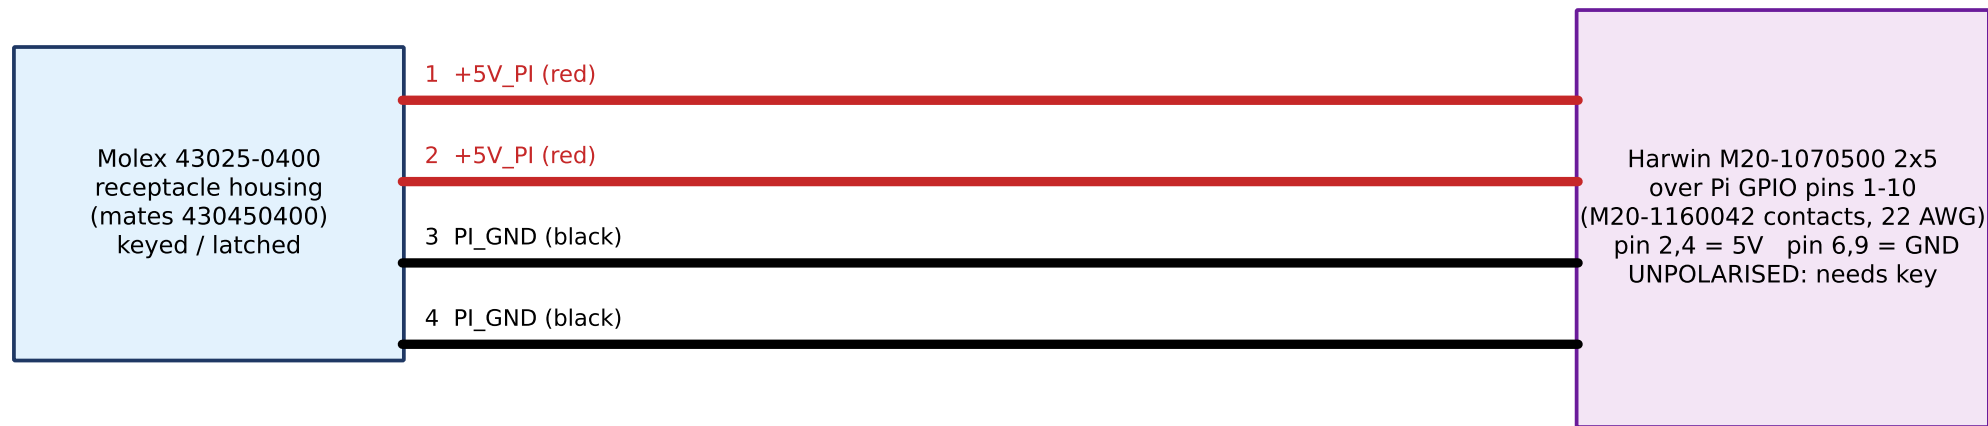

Wire: 16 AWG stranded silicone preferred (18 AWG min), length  $\leq$  150 mm, twisted pairs per rail.  
Trunk 16 AWG splices to 22 AWG branch leads near the Pi; Molex 43030 terminals at J\_OUT (confirm AWG range).  
Circuit 1+2 = +5 V pair (outer row), 3+4 = GND pair (inner row) - Molex dual-row numbering runs along rows.  
Key: housing is polarised - cannot be mated backwards. Mark pin 1 on harness label.  
PI USB-C must not be connected to any power source when this harness is fitted.