


5 V harness: J_OUT (Micro-Fit 3.0, 4 ckt) -> Raspberry Pi 5 GPIO header [RC1 - verify all part numbers]

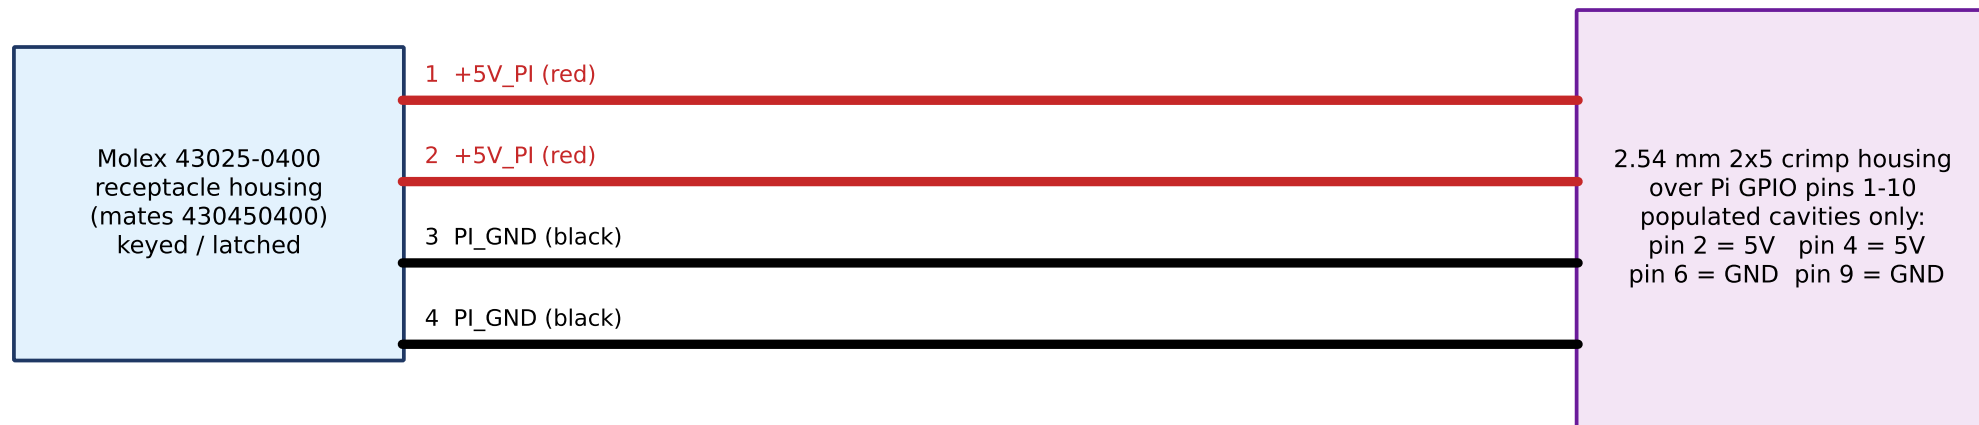

Wire: 18 AWG stranded silicone (16 AWG optional), length $\leq$ 250 mm, twisted pairs per rail.
Terminals: Molex 43030 family crimp (candidate 43030-0007; confirm AWG range / current rating).
Circuit 1+2 = +5 V pair, 3+4 = GND pair. Each pair splits to two Pi header contacts.
Key: housing is polarised - cannot be mated backwards. Mark pin 1 on harness label.
PI USB-C must not be connected to any power source when this harness is fitted.