



1-Phase 3-Wire (LLN) Delta 240V L-L

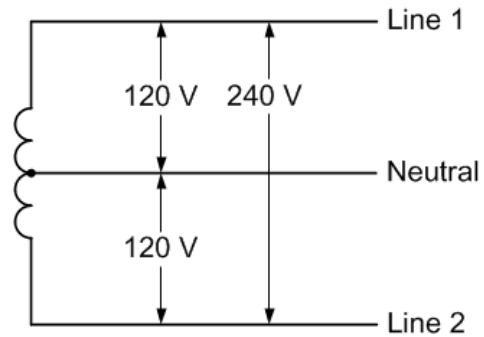


Medium	# wires	L-L	L-N	Countries	Phase Possibilities
AC-240VLL-120VLN-3PH-60Hz	3	240	120	US	AN, BN, AB, ABN
AC-240VLL-1PH-60Hz	2	240	–	US	AB
AC-120VLN-1PH-60Hz	2	–	120	US	AN, BN

3-Phase 3-Wire (LLL) Delta 480V L-L

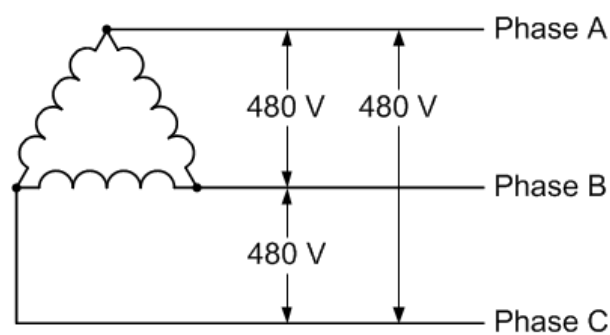


Medium	# wires	L-L	L-N	Countries	Phase Possibilities
AC-480VLL-3PH-60Hz	3	480	–	US	ABC, AB, BC, AC
AC-480VLL-1PH-60Hz	2	480	–	US	AB, BC, AC

3-Phase 3-Wire (LLL) Delta 600V L-L

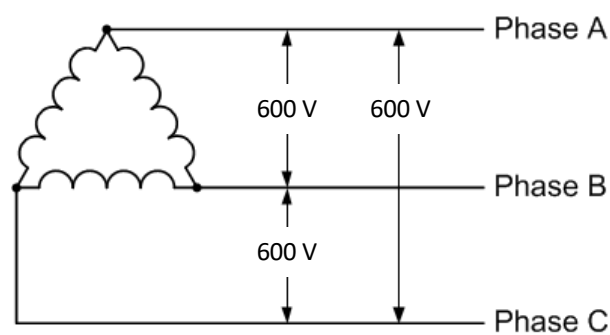


Medium	# wires	L-L	L-N	Countries	Phase Possibilities
AC-600VLL-3PH-60Hz	3	600	–	US	ABC, AB, BC, AC
AC-600VLL-1PH-60Hz	2	600	–	US	AB, BC, AC

3-Phase 4-Wire (LLLN) Delta 240 V L-L

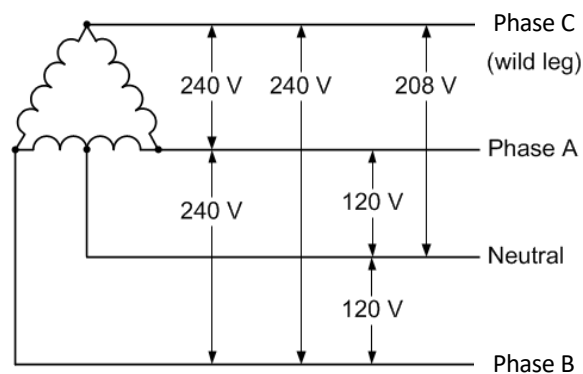


Medium	# wires	L-L	L-N	Countries	Phase Possibilities
AC-240VLL-208VLN-120VLN-3PH-60Hz	4	240	208, 120	US	AN, BN, CN, AB, BC, AC, ABN, BCN, ACN, ABC, ABCN
AC-240VLL-3PH-60Hz	3	240	–	US	ABC
AC-240VLL-120VLN-1PH-60Hz	3	240	120	US	ABN, BCN, ACN , AN, BN
AC-240VLL-1PH-60Hz	2	240	–	US	AB, BC, AC
AC-120VLN-1PH-60Hz	2	–	120	US	AN, BN

3-Phase 4-Wire (LLLN) Delta 480 V L-L

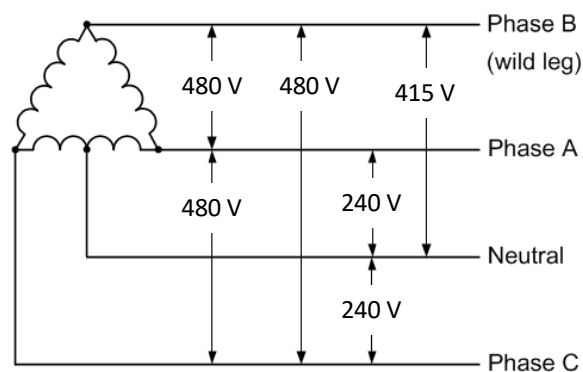


Medium	# wires	L-L	L-N	Countries	Phase Possibilities
AC-480VLL-415VLN-240VLN-3PH-60Hz	4	480	415, 240	US	AN, BN, CN, AB, BC, AC, ABN, BCN, ACN, ABC, ABCN
AC-480VLL-3PH-60Hz	3	480		US	ABC
AC-480VLL-240VLN-1PH-60Hz	3	480	240	US	ABN, BCN, ACN , AN, BN
AC-480VLL-1PH-60Hz	2	480	–	US	AB, BC, AC
AC-240VLN-1PH-60Hz	2	–	240	US	AN, BN

3-Phase 4-Wire (LLLN) Wye 208 V L-L

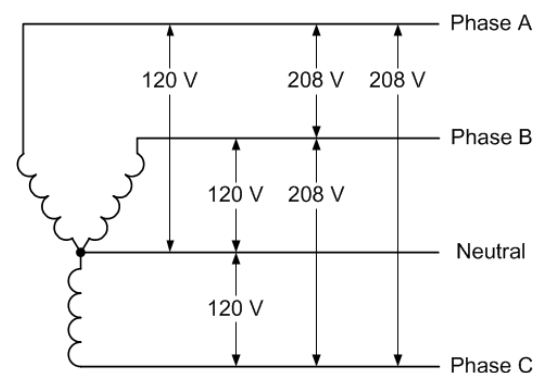


Medium	# wires	L-L	L-N	Countries	Phase Possibilities
AC-208VLL-120VLN-3PH-60Hz	4	208	120	US	AN, BN, CN, AB, BC, AC, ABN, BCN, ACN, ABC, ABCN
AC-208VLL-3PH-60Hz	3	208	–	US	ABC
AC-208VLL-120VLN-1PH-60Hz	3	208	120	US	ABN, BCN, ACN
AC-208VLL-1PH-60Hz	2	208	–	US	AB, BC, AC
AC-120VLN-1PH-60Hz	2	–	120	US	AN, BN, CN

2-Phase 4-Wire (LLLN) Wye 415 V L-L

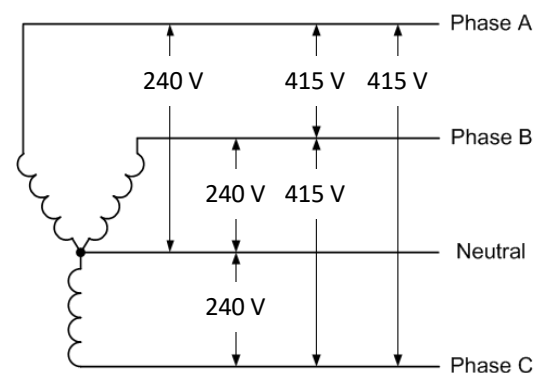

Medium	# wires	L-L	L-N	Countries	Phase Possibilities
AC-415VLL-240VLN-3PH-60Hz	4	415	240	ASTL	AN, BN, CN, AB, BC, AC, ABN, BCN, ACN, ABC, ABCN
AC-415VLL-3PH-60Hz	3	415	–	ASTL	ABC
AC-415VLL-240VLN-1PH-60Hz	3	415	240	ASTL	ABN, BCN, ACN
AC-415VLL-1PH-60Hz	2	415	–	ASTL	AB, BC, AC
AC-240VLN-1PH-60Hz	2	–	240	ASTL	AN, BN, CN

2-Phase 4-Wire (LLLN) Wye 480 V L-L

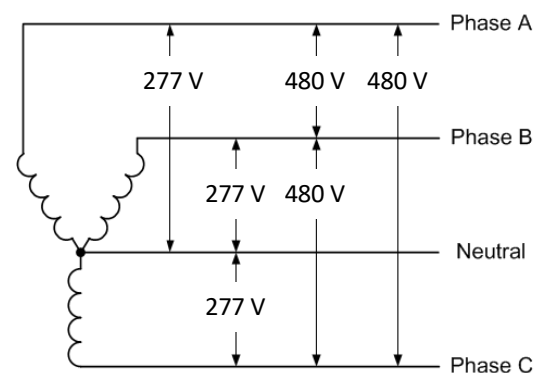

Medium	# wires	L-L	L-N	Countries	Phase Possibilities
AC-480VLL-277VLN-3PH-60Hz	4	480	277	US	AN, BN, CN, AB, BC, AC, ABN, BCN, ACN, ABC, ABCN
AC-480VLL-3PH-60Hz	3	480	–	US	ABC
AC-480VLL-277VLN-1PH-60Hz	3	480	277	US	ABN, BCN, ACN
AC-480VLL-1PH-60Hz	2	480	–	US	AB, BC, AC
AC-277VLN-1PH-60Hz	2	–	277	US	AN, BN, CN