

## Project 2: SATPlan and the Tower of Hanoi

CSCI 561

Fall 2018

The *Tower of Hanoi* is a classic puzzle consisting of round disks stacked on pegs. One must move all disks to the final peg, subject to the following constraints:

1. Only one disk can be moved at a time.
2. Each move consists of taking the upper disk from one of the stacks and placing it on top of another stack.
3. No disk may be placed on top of a smaller disk.

Answer the following questions:

1. (15 pts) Create PDDL domains (operators and facts) for the following Tower of Hanoi instances (it is possible that the PDDL operators will be the same):
  - (a) Three pegs and two disks.
  - (b) Three pegs and four disks.
2. (10 pts) Download one or more of the following planners and use them to produce plans for your PDDL domains:
  - Blackbox: <https://www.cs.rochester.edu/u/kautz/satplan/blackbox/>
  - Madagascar: <http://research.ics.aalto.fi/software/sat/madagascar/>
  - TMKit: <http://tmkit.dyalab.org/>

What plans are produced by each planner for each instance (two and four disks)?

3. (15 pts) Encode the two-disk instance as a Boolean formula using the SATPlan method.
4. (10 pts) Find the satisfying assignments for two-disk boolean formula using your DPLL implementation.
  - (a) What is the satisfying assignment?
  - (b) What is the corresponding plan?
5. **Extra Credit:** Compare the performance/scalability of your DPLL implementation with one or more state-of-the-art SMT solvers such as:
  - Z3: <https://github.com/Z3Prover/z3>
  - CVC4: <http://cvc4.cs.stanford.edu/web/>

(Note: you might find the Lisp TIME macro and SBCL's statistical profiler (<http://www.sbcl.org/manual/#Statistical-Profiler>) useful to evaluate performance).

6. **Extra Credit:** Optimize your DPLL implementation. For example, you could improve the implementation of DPLL-CHOOSE-LITERAL. Discuss the optimizations you implement and characterize the speedup (for example, using TIME or SBCL's statistical profiler).

Names:

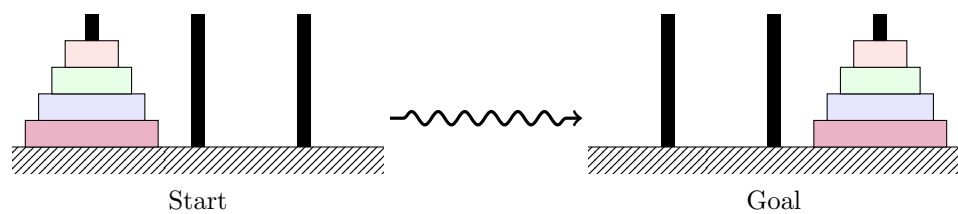


Figure 1: Tower of Hanoi Puzzle with 3 pegs and 4 disks.