


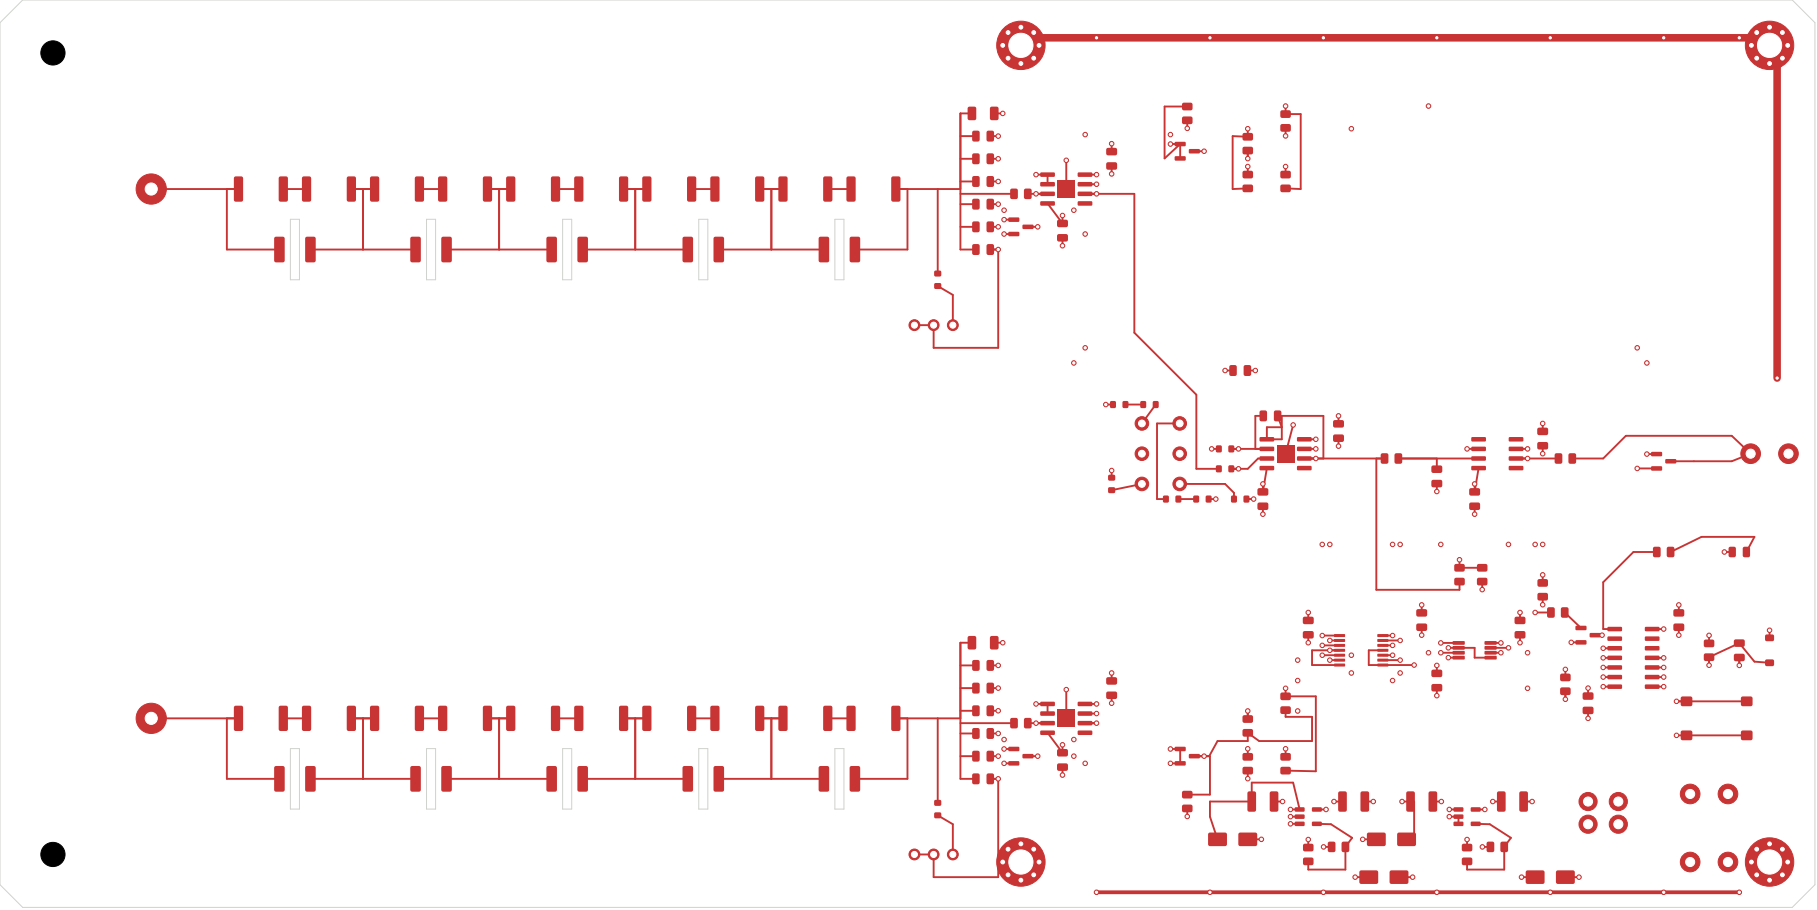


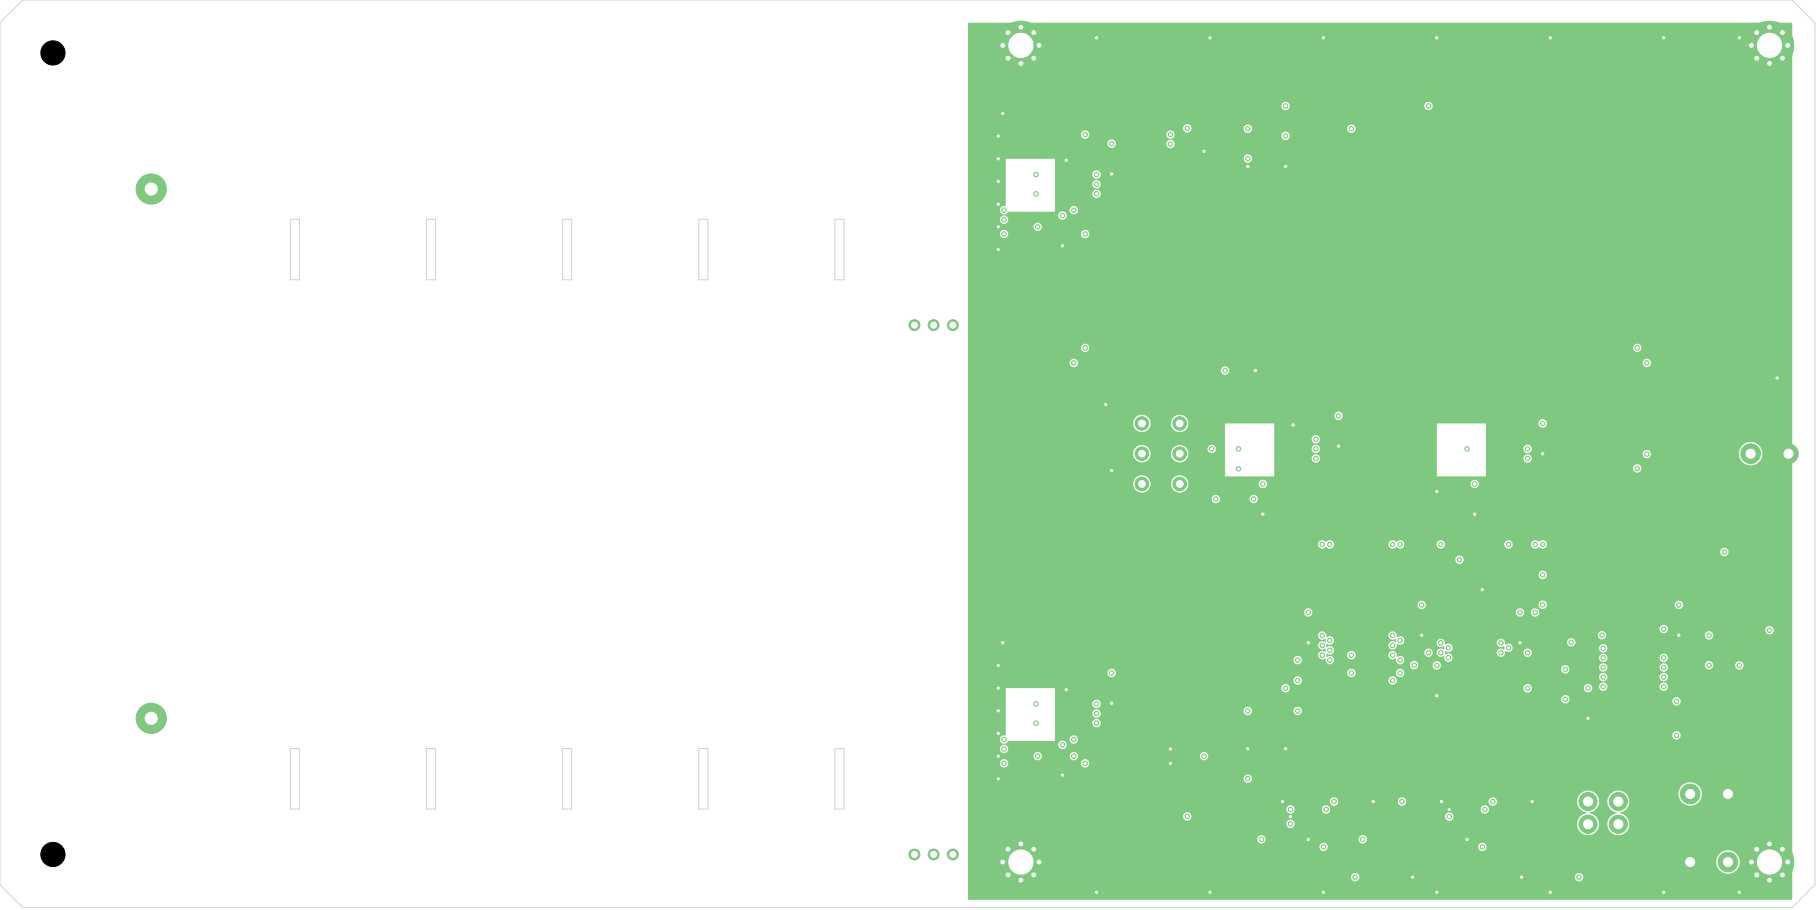

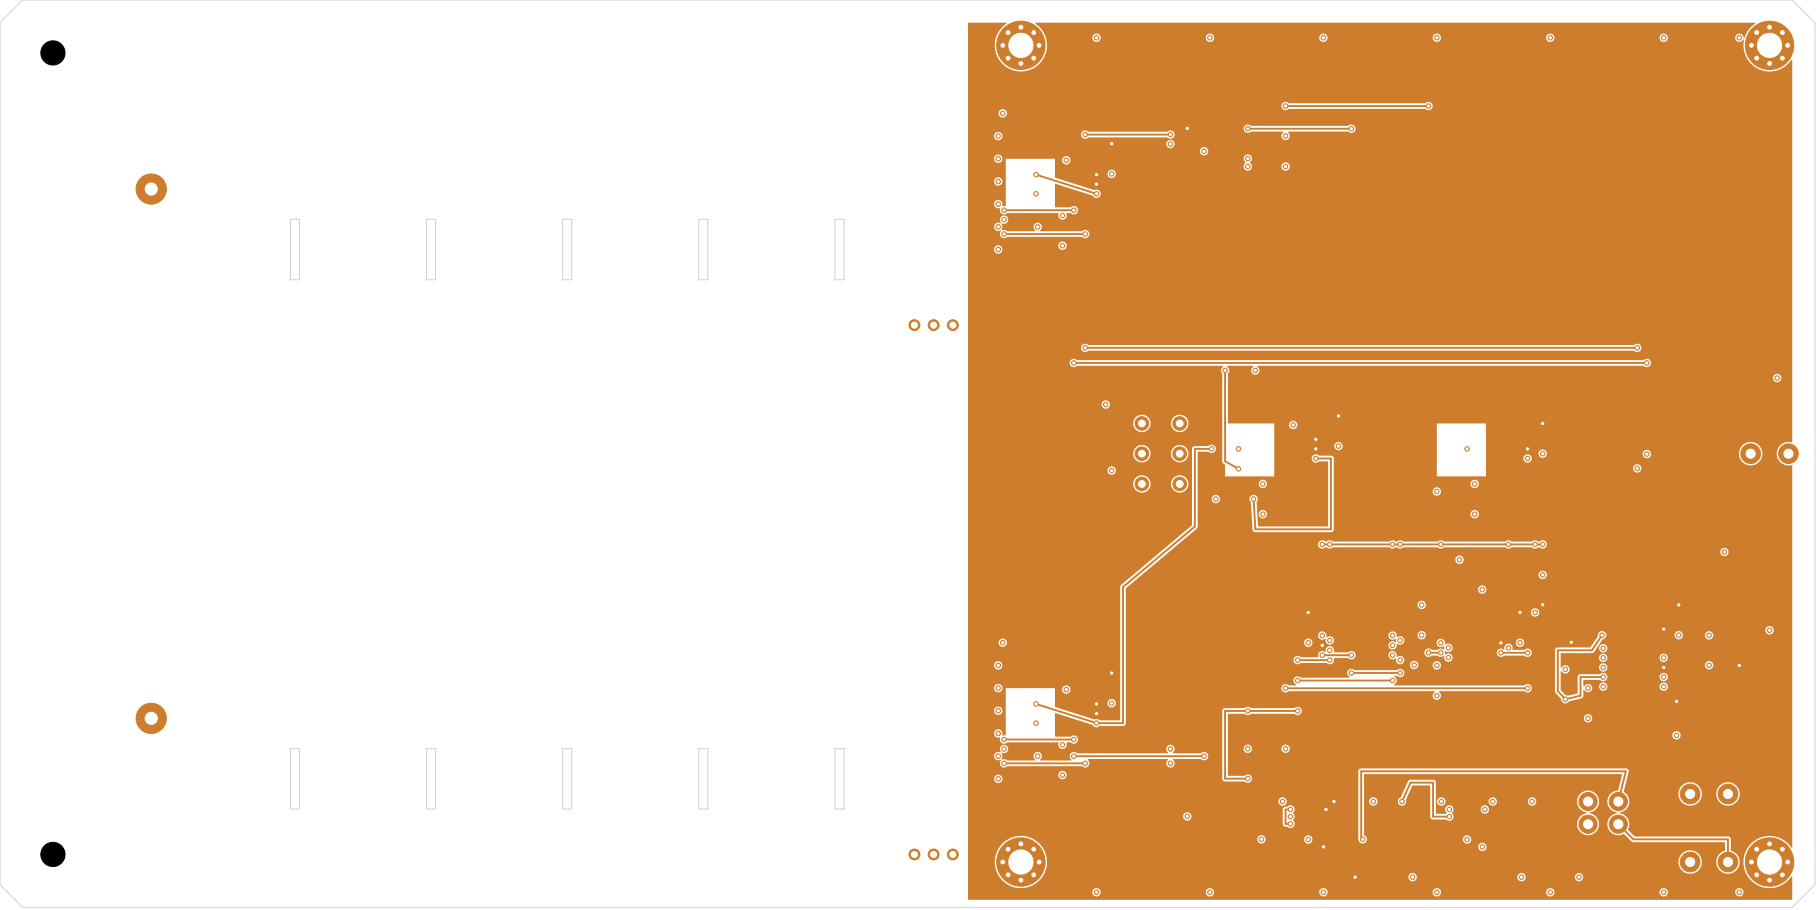

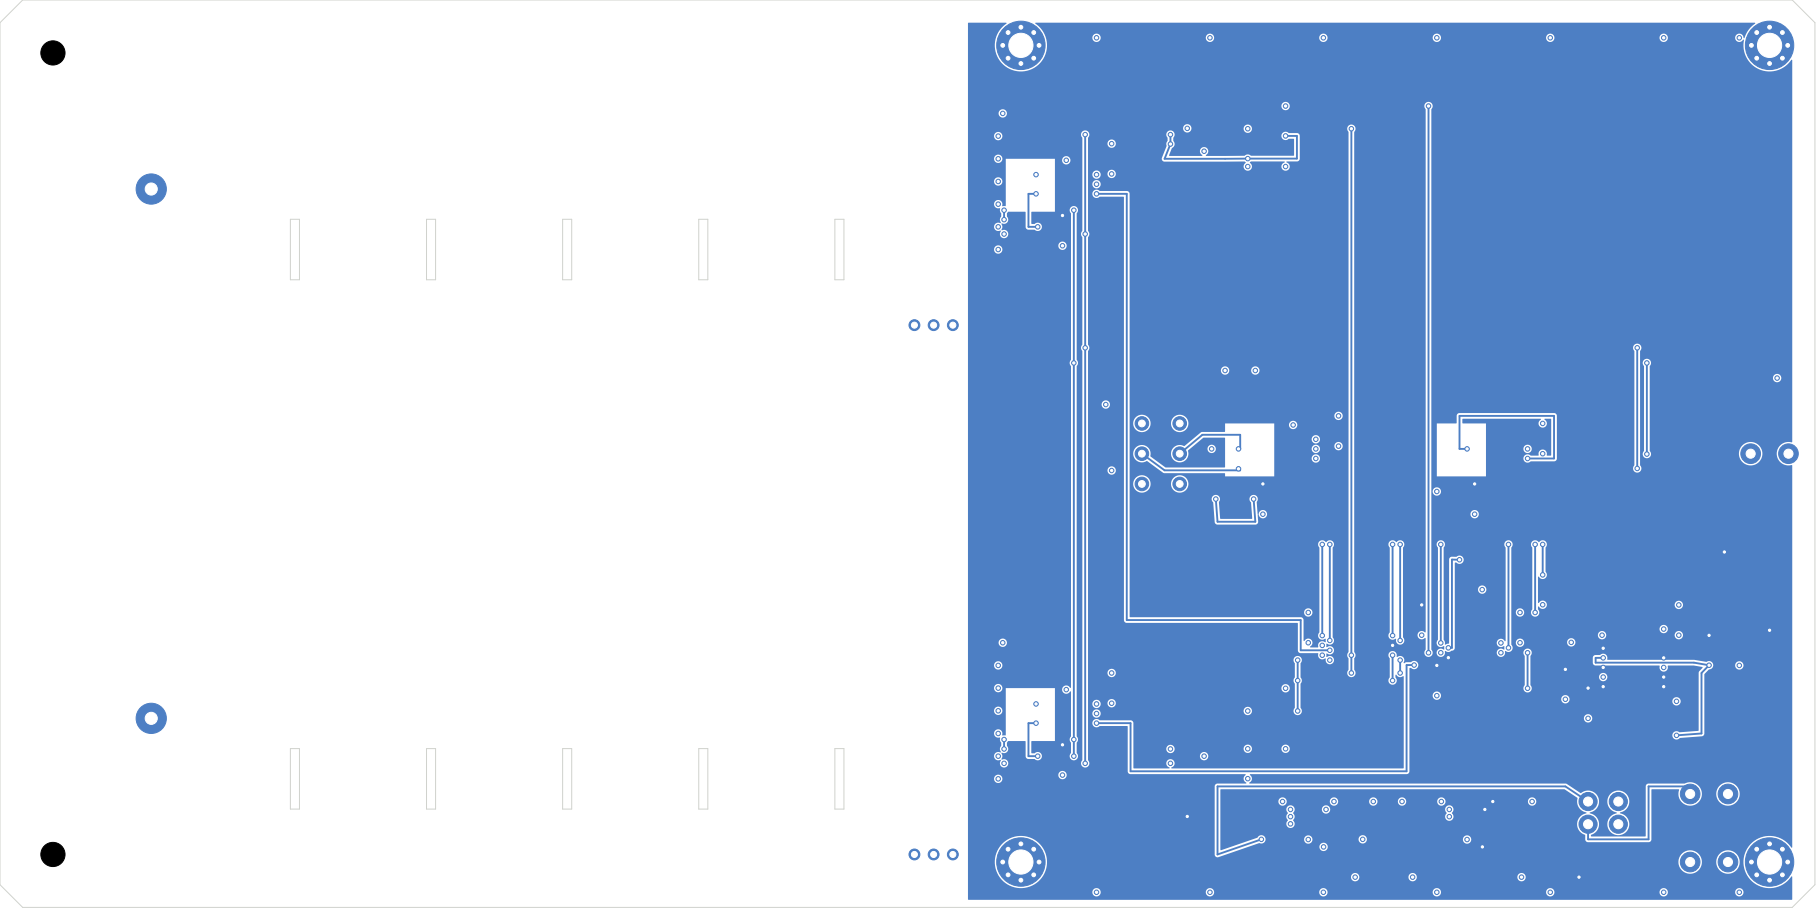

TEMPER | DIFFERENTIAL PROBE
REV A | ENGINEERING PROTOTYPE
EARTH / SHIELD BOND AT OUTPUT
TIP +
W_HV1
TIP –
W_HV2
HV DIVIDERS: NO COPPER ON INNER / BOTTOM LAYERS
FIXED SHIELD: KEEP 20 mm ABOVE / BELOW HV COPPER
NOT CAT RATED | QUALIFICATION REQUIRED
RANGE: SHORT WIRES ONLY
BNC / 1M
W_J3
W_SW1
W_SW2
W_BT1
W_BT2
SW3
H1
H2
H3
H4
H5
H6
R1
R2
R3
R4
R5
R6
R7
R8
R9
R10
R11
R12
R21
R22
R23
R24
R25
R26
R27
R28
R29
R30
R31
R32
R61
R62
R63
R64
R65
R66
R67
R68
R69
R70
R71
R72
R73
R74
R75
R81
R82
R83
R84
R85
R86
R87
R88
R89
R90
R91
R92
R93
R94
R95
R96
C1
C2
C3
C4
C5
C21
C22
C23
C24
C25
C41
C42
C43
C44
C45
C46
C47
C51
C52
C53
C54
C55
C56
C57
C61
C62
C63
C71
C72
C73
C74
C81
C82
C83
C84
C85
C86
C87
C88
C89
C90
C91
C92
C93
C94
C95
RV1
RV2
U1
U2
U3
U4
U5
U6
U7
U8
U9
U10
U11
D1
D2
D3
D4
D5
D6
D7
D8
D9
Q1


H5
H1
H2
R1
R2
R3
R4
R5
R6
R7
R8
R9
R10
C1
C2
C3
C4
C5
RV1
C41
C42
C43
C44
C45
C46
C47
U1
R12
D1
C48
C49
U10
R89
R90
R91
R92
C85
U3
R69
C86
C87
R70
D3
C88
C89
C90
C91
C92
R96
D9
C93
C94
C95
C96
C97
R74
C98
C99
C100
U5
U6
U7
C101
C102
C103
C104
C105
C106
SW3
D8
H6
H3
H4
R21
R22
R23
R24
R25
R26
R27
R28
R29
R30
C21
C22
C23
C24
C25
RV2
C51
C52
C53
C54
C55
C56
C57
U2
R32
D2
C58
C59
C60
C61
C62
C63
C64
C65
C66
C67
C68
C69
C70
U8
U9
R81
R82
R83
C71
C72
C73
C74
D4
D5
D6
D7