


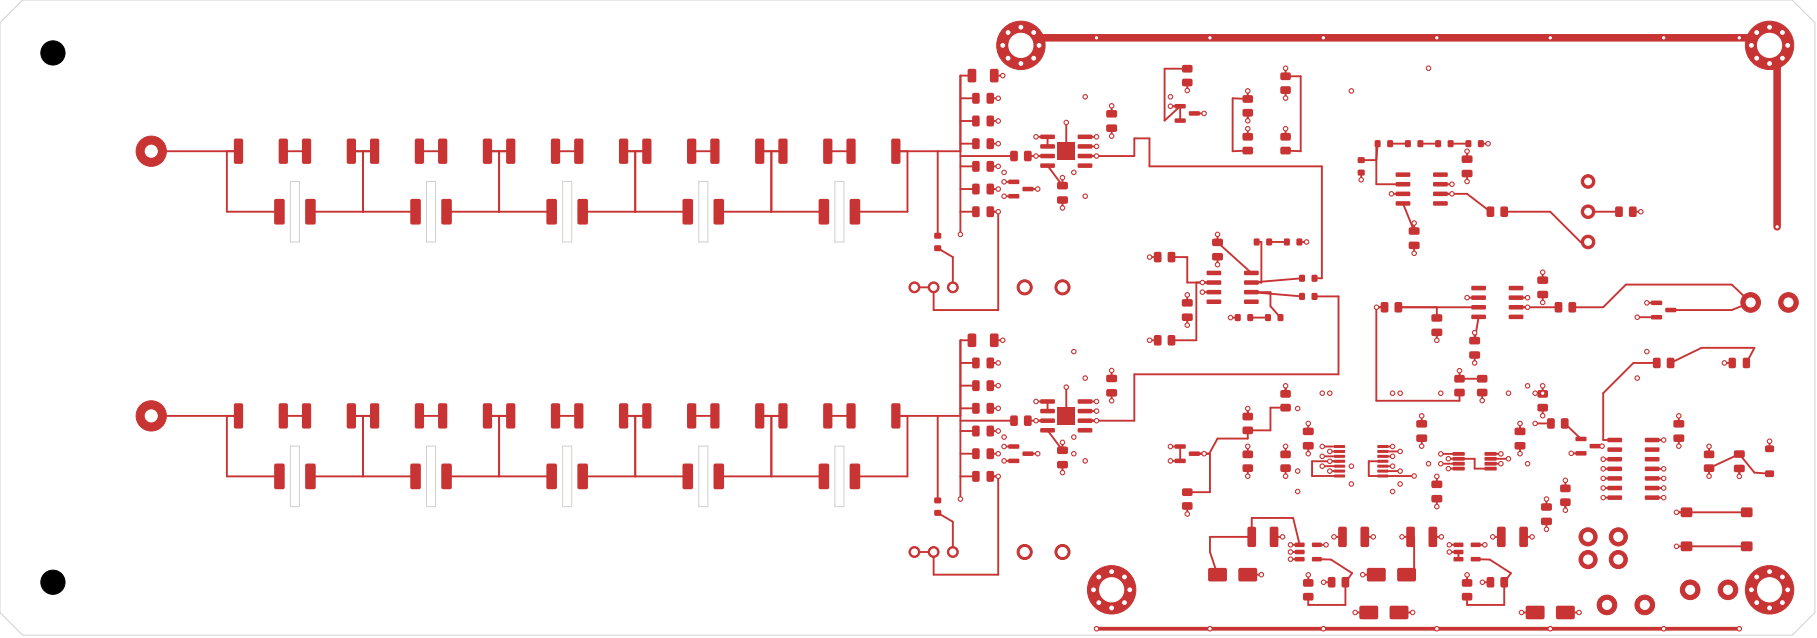
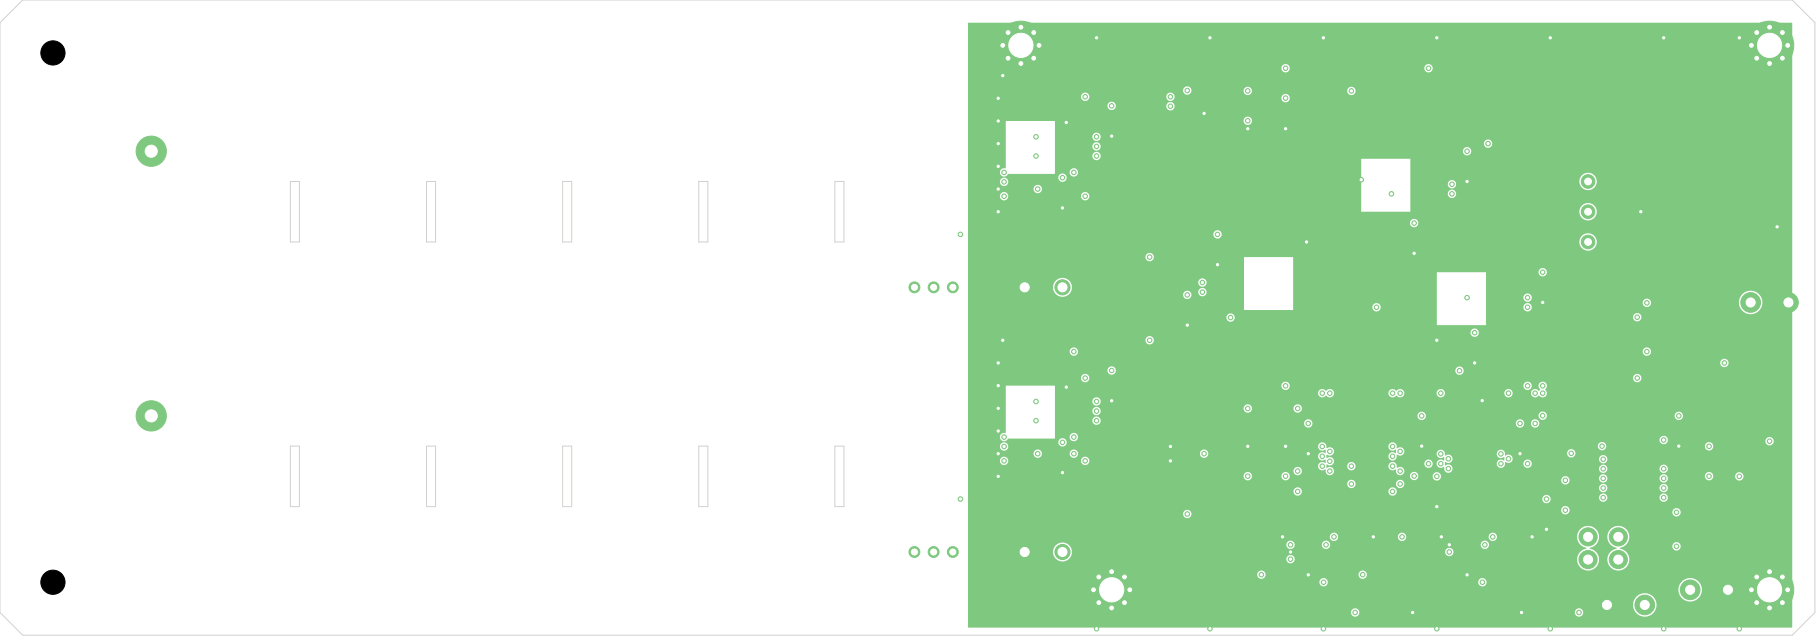


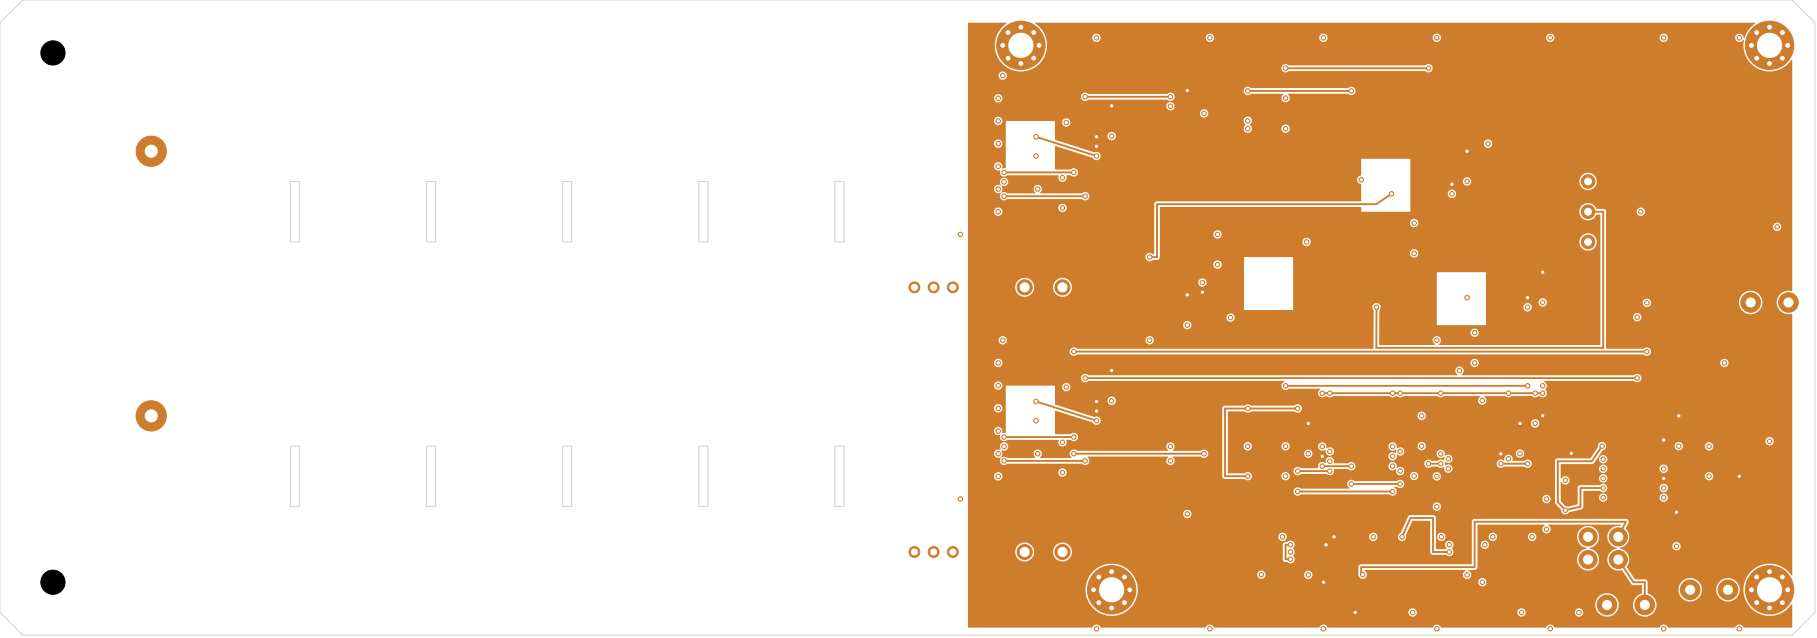

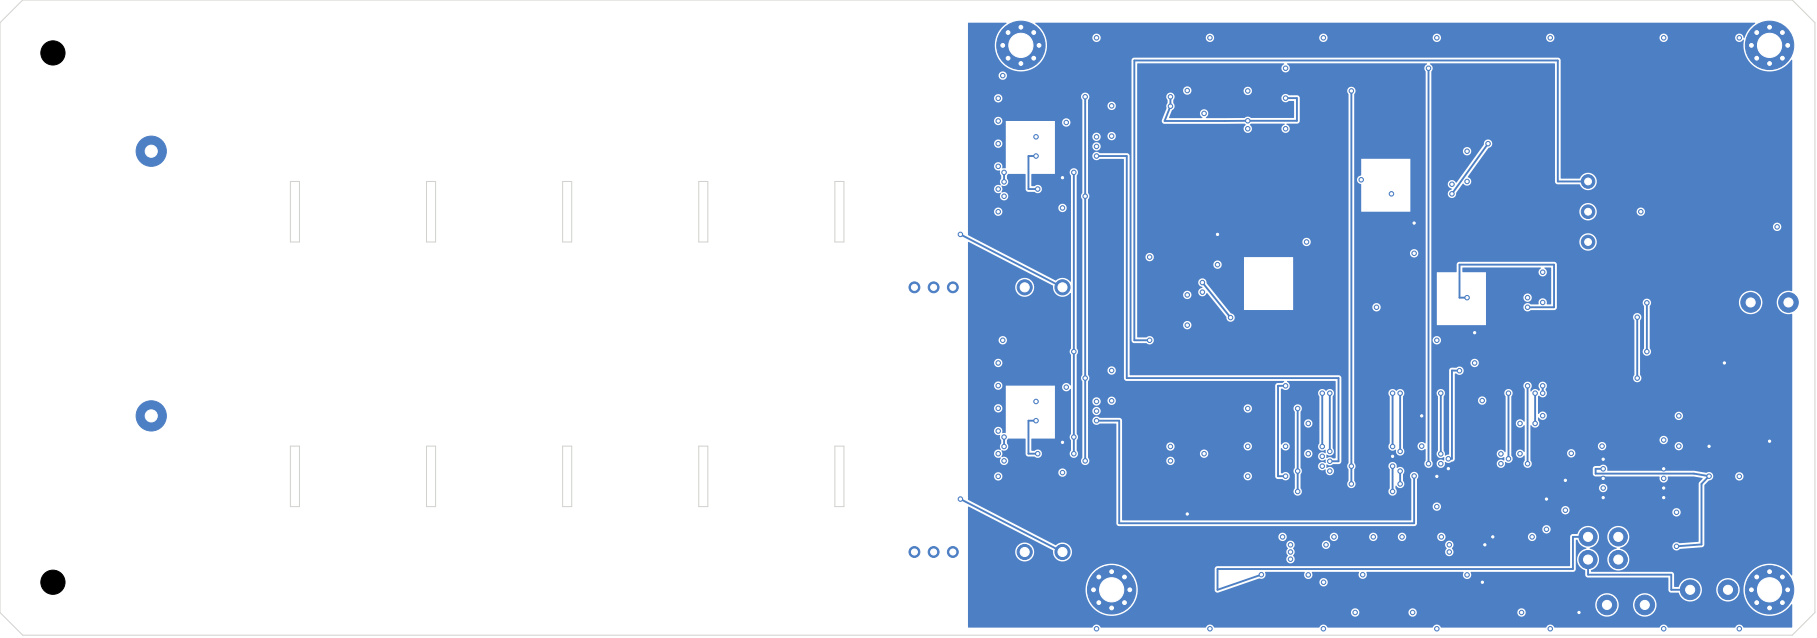

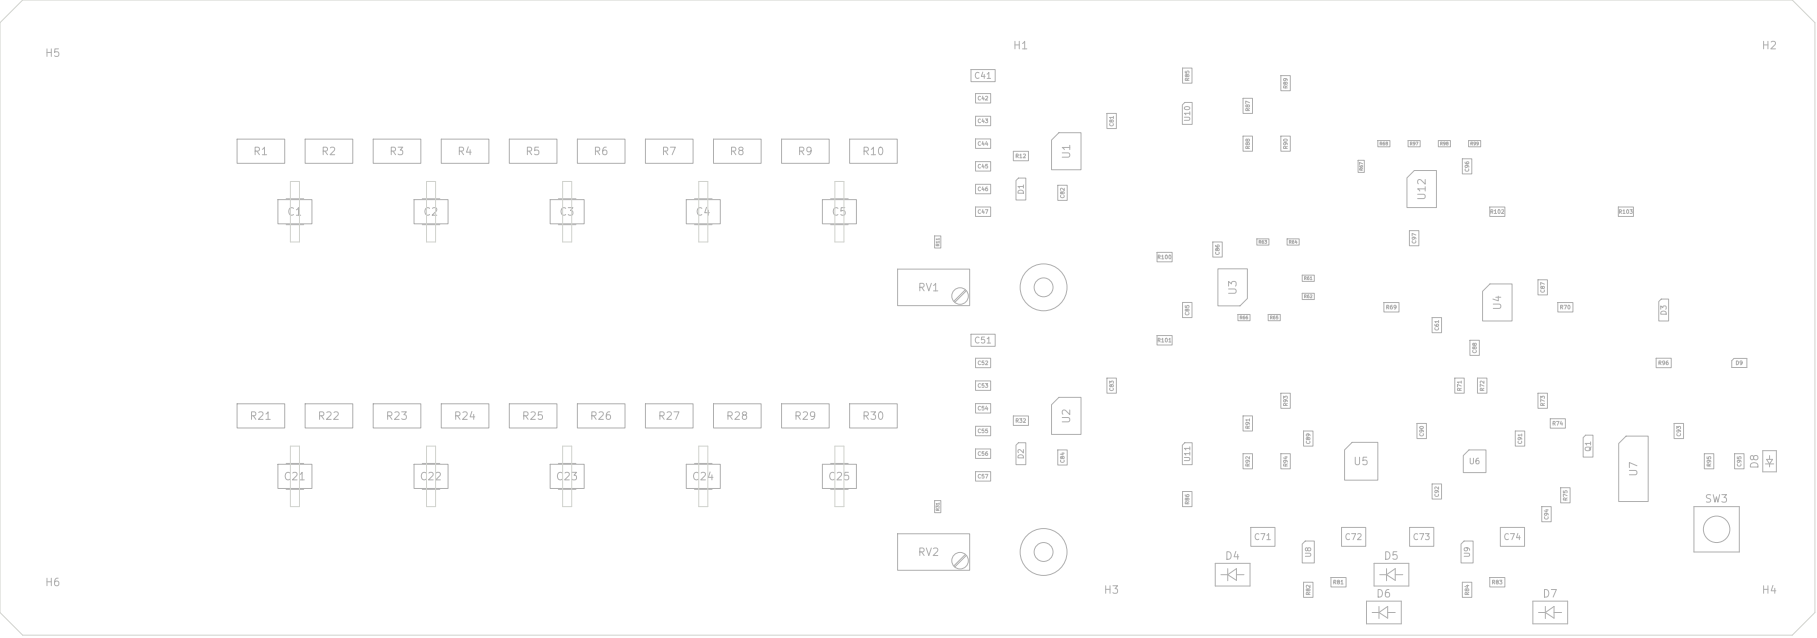

TEMPER | DIFFERENTIAL PROBE
REV B | ENGINEERING PROTOTYPE
TIP +
W_HV1
TIP –
W_HV2
HV DIVIDERS: NO INNER / BOTTOM PLANES
FIXED SHIELD: KEEP 20 mm FROM HV CONDUCTORS
3 kV TIP / DIFFERENTIAL TARGET | NOT CAT RATED
EARTH / SHIELD BOND AT OUTPUT
OUTPUT RANGE SELECT
BNC / 1M
W_J3
W_SW1
W_SW2
W_BT1
W_BT2
SW3
H1
H2
H3
H4
H5
H6
R1
R2
R3
R4
R5
R6
R7
R8
R9
R10
R11
R12
R21
R22
R23
R24
R25
R26
R27
R28
R29
R30
R31
R32
RV1
RV2
C1
C2
C3
C4
C5
C21
C22
C23
C24
C25
C41
C42
C43
C44
C45
C46
C47
C51
C52
C53
C54
C55
C56
C57
C81
C82
C83
C84
U1
U2
D1
D2
CT1
CT2
R85
R86
R87
R88
R89
R90
R91
R92
R93
R94
U10
U11
C86
C85
C89
R100
R101
R63
R64
R66
R65
U3
R61
R62
R67
R68
U12
C96
R97
R98
R99
R102
R103
C97
C87
C88
C90
C91
C92
C93
C94
R71
R72
R73
R74
R75
U4
U5
U6
U7
U8
U9
Q1
R69
R70
C61
D3
D9
R96
R95
C95
D8
C71
C72
C73
C74
R81
R82
R83
R84
D4
D5
D6
D7


H5
H1
H2
R1
R2
R3
R4
R5
R6
R7
R8
R9
R10
C1
C2
C3
C4
C5
C41
C42
C43
C44
C45
C46
C47
U1
D1
RV1
R21
R22
R23
R24
R25
R26
R27
R28
R29
R30
C21
C22
C23
C24
C25
C51
C52
C53
C54
C55
C56
C57
U2
D2
RV2
H6
H3
U3
U4
U5
U6
U7
U8
U9
U10
U11
U12
D3
D4
D5
D6
D7
D8
D9
SW3
H4