**EW Electronics**

CERAMIC DIELECTRIC TRIMMER CAPACITORS

**GKGxx015**

RoHS and Reach Compliant

# PLASTIC ENCASED TYPE
## GKG SERIES


### FEATURES

- Very low cost.
- Wide selection of capacitance ranges.
- Suitable for printed circuit production methods using "spring leads" or "straight leads".

### SPECIFICATIONS

Operating Temperature Range: –25°C to +85°C
Voltage Rating: 100 VDC
Dielectric Withstanding Voltage: 220 VDC
Insulation Resistance: $10^4$ Megohms min
Torque: 15 to 150 g-cm (0.21 to 2.1 oz-in)

### *6 mm Economy Models*




| 6mm Models | | | | | |
|---|---|---|---|---|---|
| MIN | MAX | TCC(ppm/C) | Q Min(1MHz) | Color Code | Top Adj Part # |
| 1.0 | 3.0 | NPO +-250 | 300 | Black | GKG3R015 |
| 2.0 | 5.0 | NPO +-250 | 300 | Blue | GKG5R015 |
| 3.0 | 10.0 | NPO +-250 | 300 | White | GKG10015 |
| 5.0 | 20.0 | N750 +-250 | 300 | Red | GKG20015 |
| 6.5 | 30.0 | N1000 +-500 | 200 | Green | GKG30015 |
| 7.0 | 40.0 | N2200 +-800 | 200 | Yellow | GKG40015 |
| 10.0 | 50.0 | N2200 +-800 | 200 | Brown | GKG50015 |
| 12.0 | 60.0 | N2200 +-800 | 200 | Brown | GKG60015 |
| 15.0 | 70.0 | N2200 +-800 | 200 | Brown | GKG70015 |
| 30.0 | 120.0 | N2200 +-800 | 150 | Brown | GKG12115 |

**GKGxxx15 KIT- 10 pcs each**

**3pf,5pf,10pf,20pf,30pf,40pf,50pf,60pf,70pf,120pf**



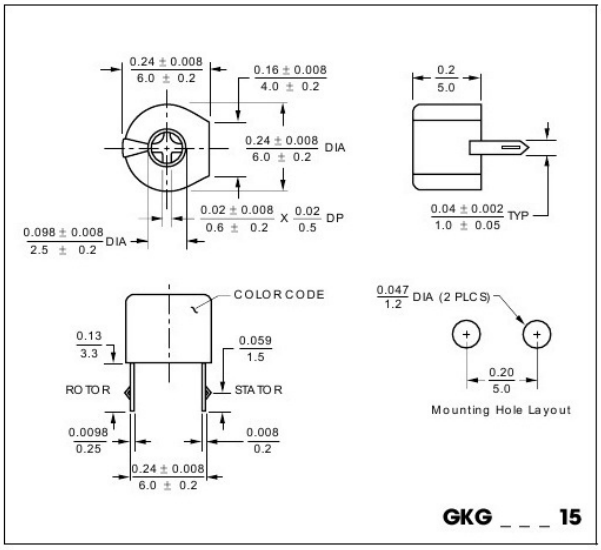


All dimensions are in / mm.
Unless otherwise specified, the tolerance on dimensions is ± 0.004 / 0.1; except slot tolerance is ± 0.008 / 0.2.


**EW Electronics**
**1825 Surveyor Ave.**
**Unit-102**
**Simi Valley, CA 93063**
**(818)718-2500**
**www.ewelectronics.com**