


1800 W nominal AC input / 120 VAC / external 15 A RMS foldback required

ALL control, permit and auxiliary headers are HOT bus-minus referenced

UNQUALIFIED PROTOTYPE – external isolated bias and precharge supervisor required

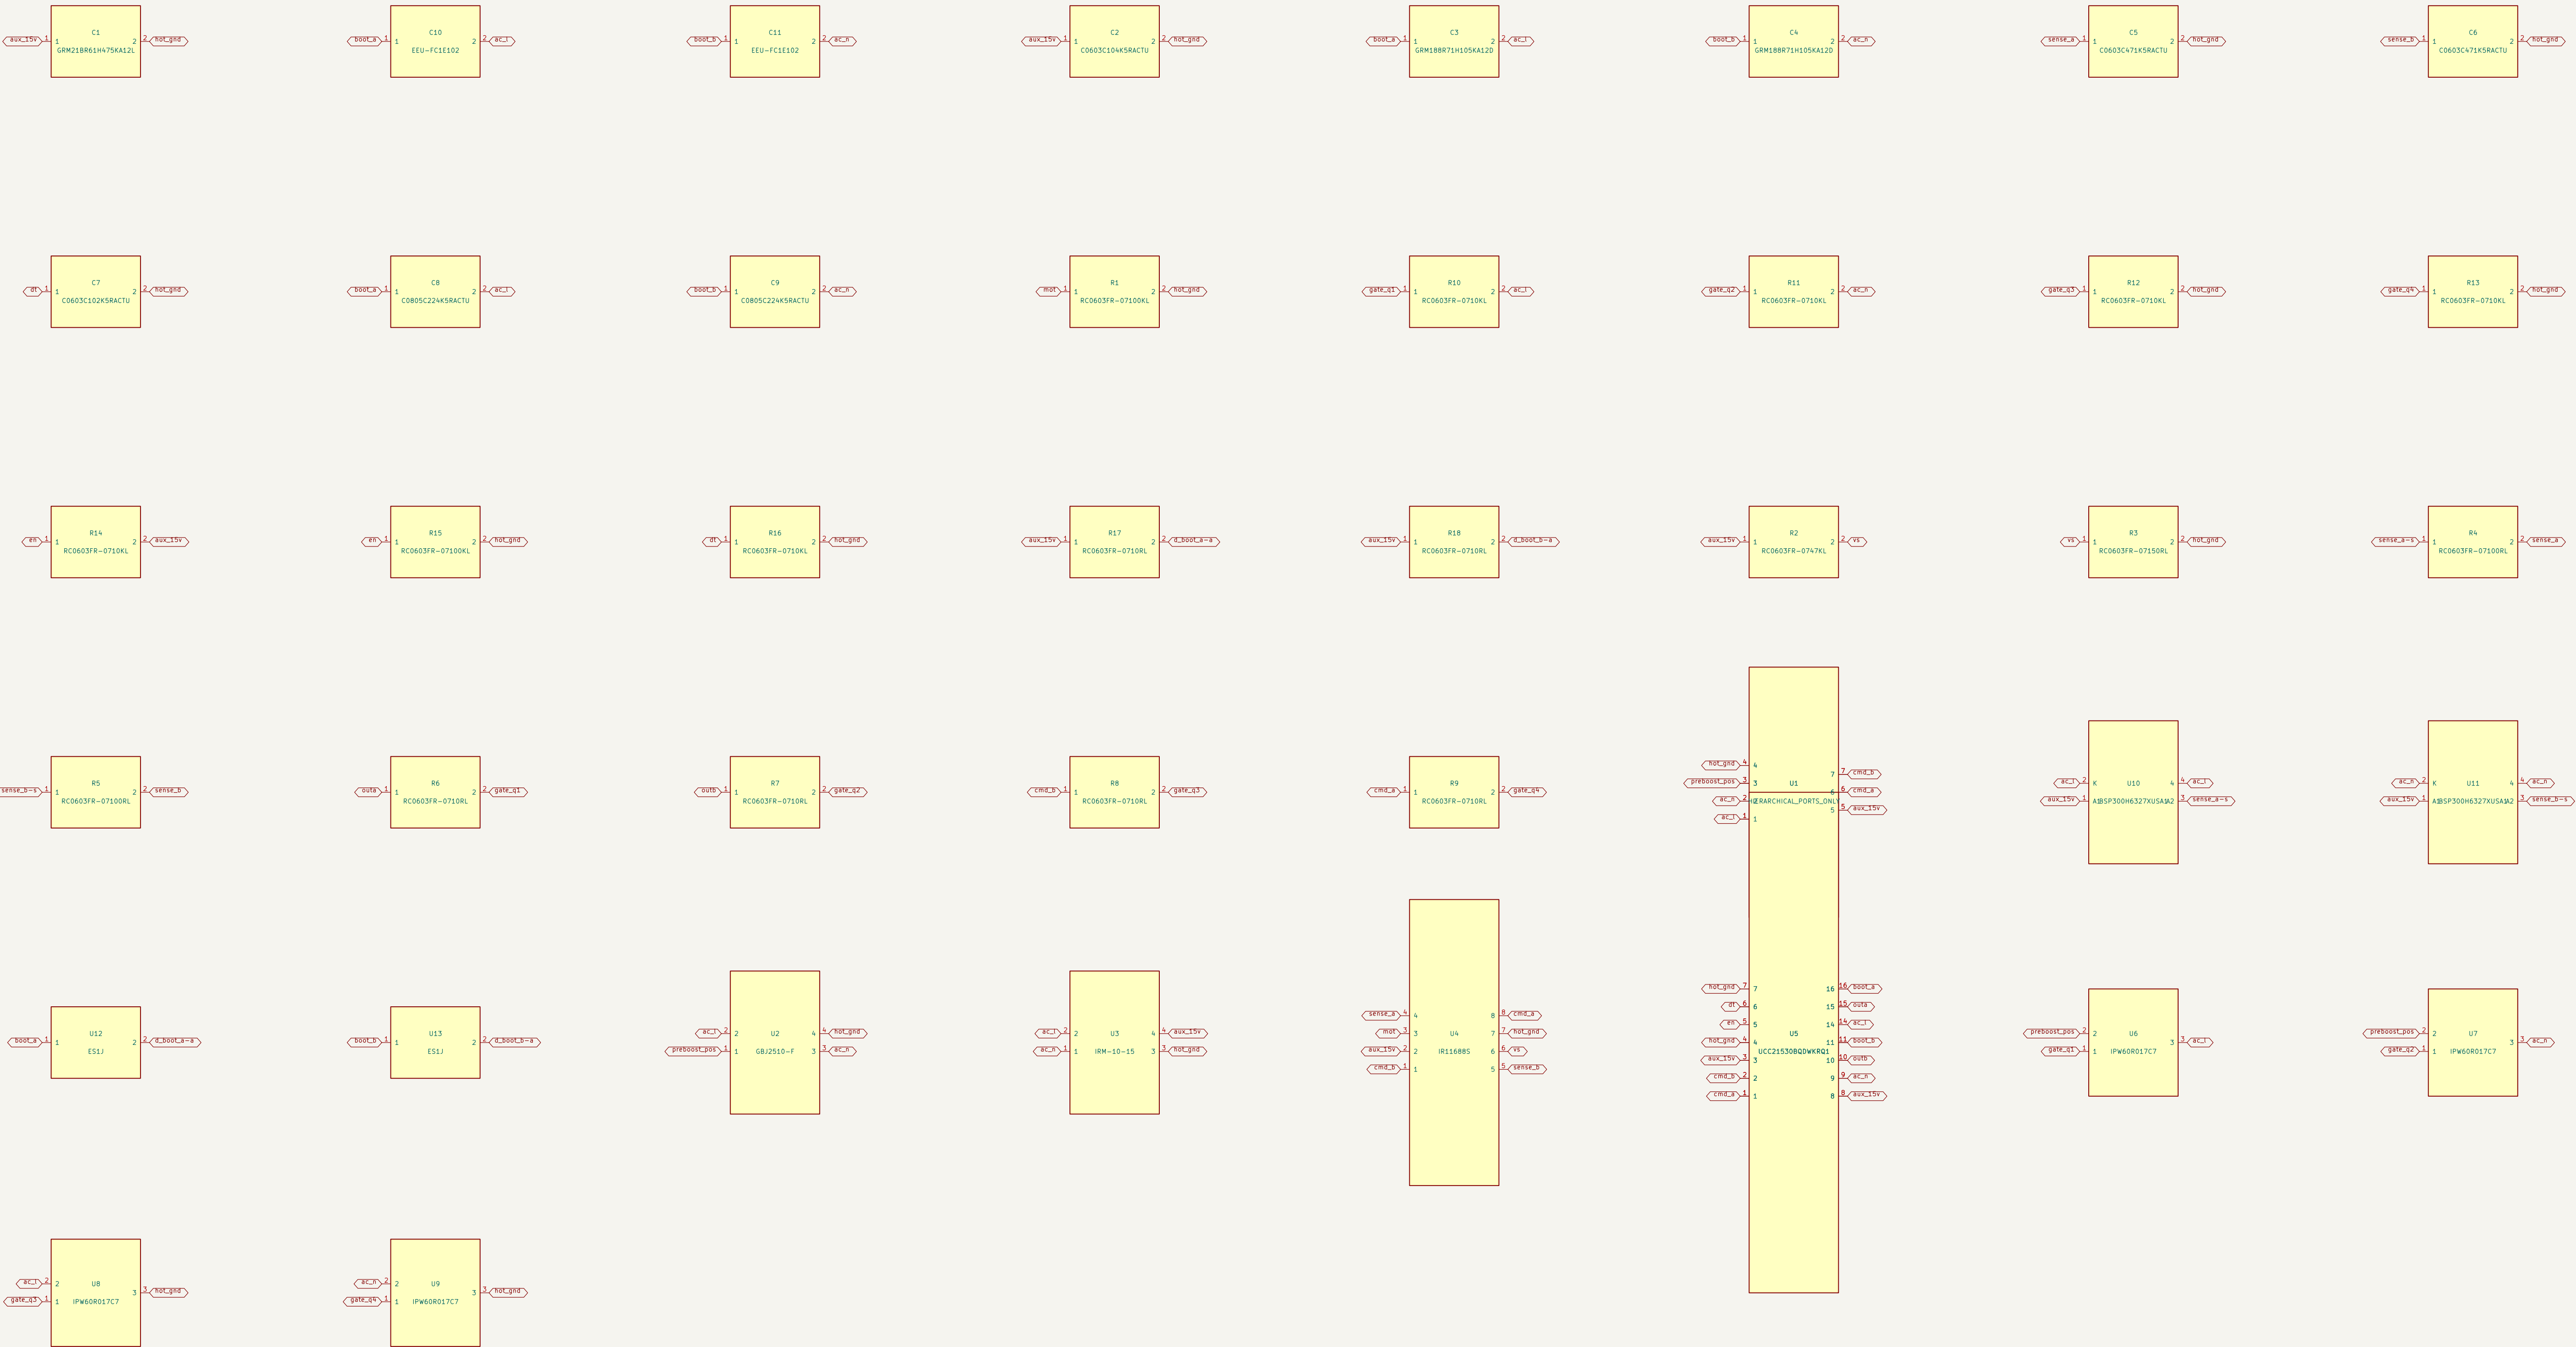

edit elec/src/*_ato -- I run make schematics GENERATED -- do not hand-edit	
Temper	
Sheet: /	
File: section.kicad_sch	
Title: Standalone 1800 W Input Boost PFC	
Size: A1	Date: 2026-09-12
KiCad E.D.A. 10.0.4	Id: 1/1
15	16