


AUX ACTIVE CLAMP / ALL NETS HOT-REFERENCED

Input: regulated 15V; 35V fault envelope remains conditional.

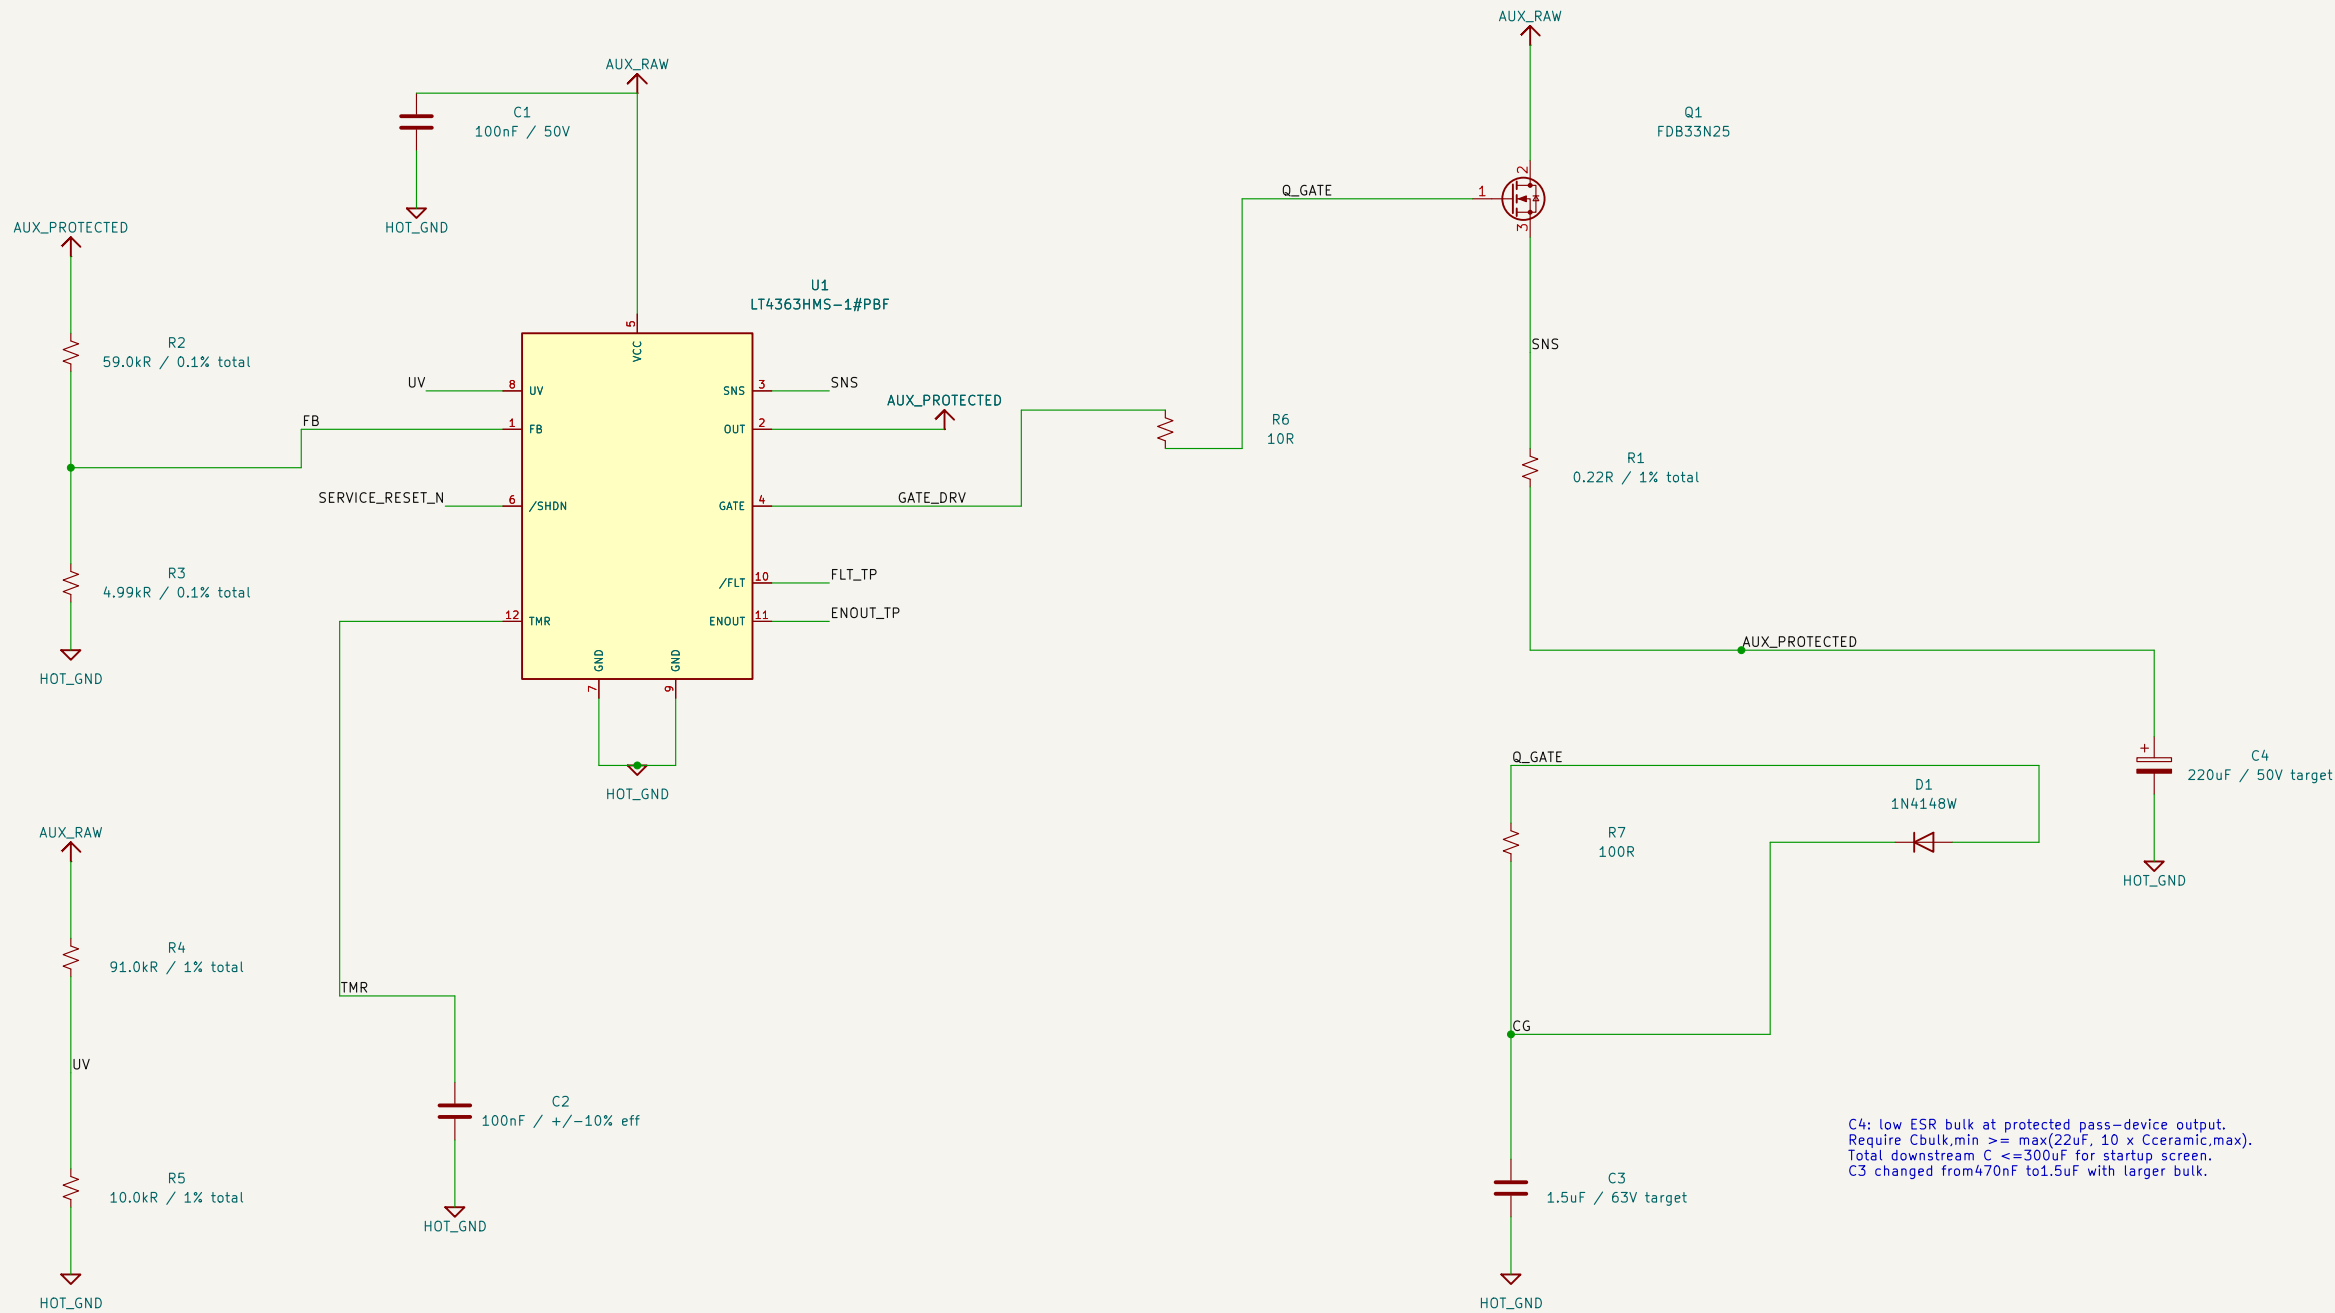

SERVICE_RESET_N: local contact to HOT_GND only; normally open.
Does not follow source PERMIT. Hold >=120ms; verify release slew.
FLT_TP / ENOUT_TP are observation only; no fault-net pullup fitted.

Capacitor MPN/ESR/temperature limits remain unselected; footprints are placeholders.
No output-peak, startup, SOA or single-pass-FET-short qualification is claimed.

Review fixture – not production or hardware qualification

Sheet: /
File: clamp.kicad_sch

Title: Temper / clamp interface fixture

Size: A3 Date: 2026-09-22

KiCad E.D.A. 10.0.4

Rev: 16-prototype

Id: 1/1