



1

2


3

4

5

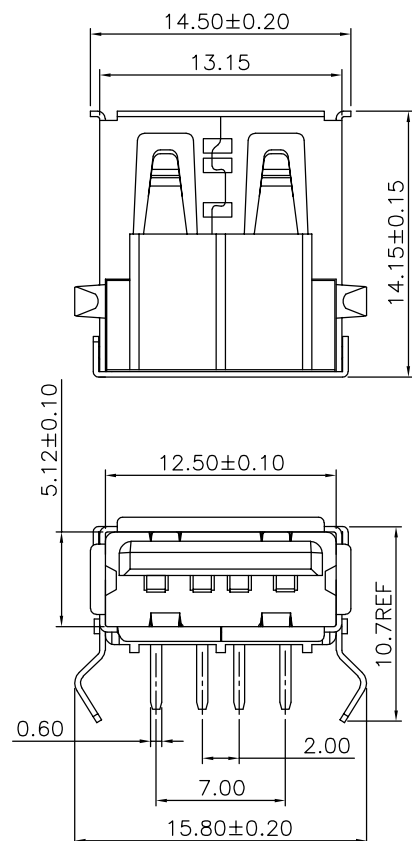

SECTION A-A

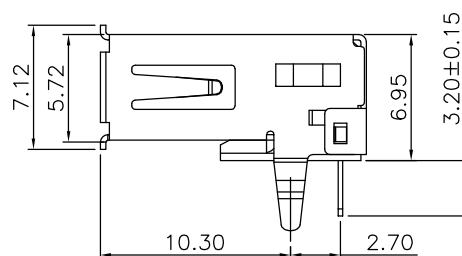

## Specifications:

Current Rating:1.5A AC/DC  
 Voltage Rating:30V AC/DC  
 Contact Resistance:30m ohm. Max.  
 Insulation Resistance:1,000M ohm. min.  
 Withstanding Voltage:500V AC For One Minute  
 Operating Temperature Range:-55°C ~ +85°C

## Material and Finish

Insulator:PBT&PA9T(UL94V-0)  
 Contact:Phosphor Bronze  
 Plating:Gold Plated 1U" & 30u"  
 Tin Plated on Solder Tail.  
 Shell:Brass,Nickel Plated 100U"

## PART

NUMBER:


**USB-A1HSXX**

## COLOR:

B:  
 Black  
 W:  
 White

## PLATING:

6: Selective Au Flash/50u" Ni  
 8: Selective 30u" Au/50u" Ni (USB 2.0)

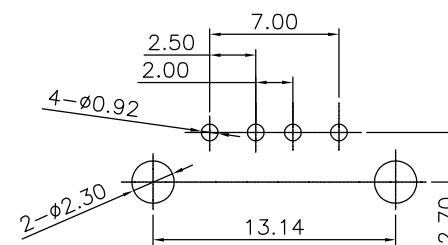PCB LAYOUT

RoHS Compliant

DRAWN:

Richie

GENERAL TOLERANCE:

.X=±0.20  
 .XX=±0.15

CHECKED:

Jeremy Liu

UNIT: MM

SCALE: 1:1

APPROVAL:

Mike Wu

SHEET: 1/2

PROJECTION:



ON-SHORE TECHNOLOGY, INC.

DESCRIPTION:

USB - A Type, Horizantal, thru hole

PART NO:

USB-A1HSXX

B	25-Mar-2021		Ben
A	05-Nov-2010		Richie
REV	DATE	FILE	BY