EVIUM CHARGING

Evium

DCFC 240kW

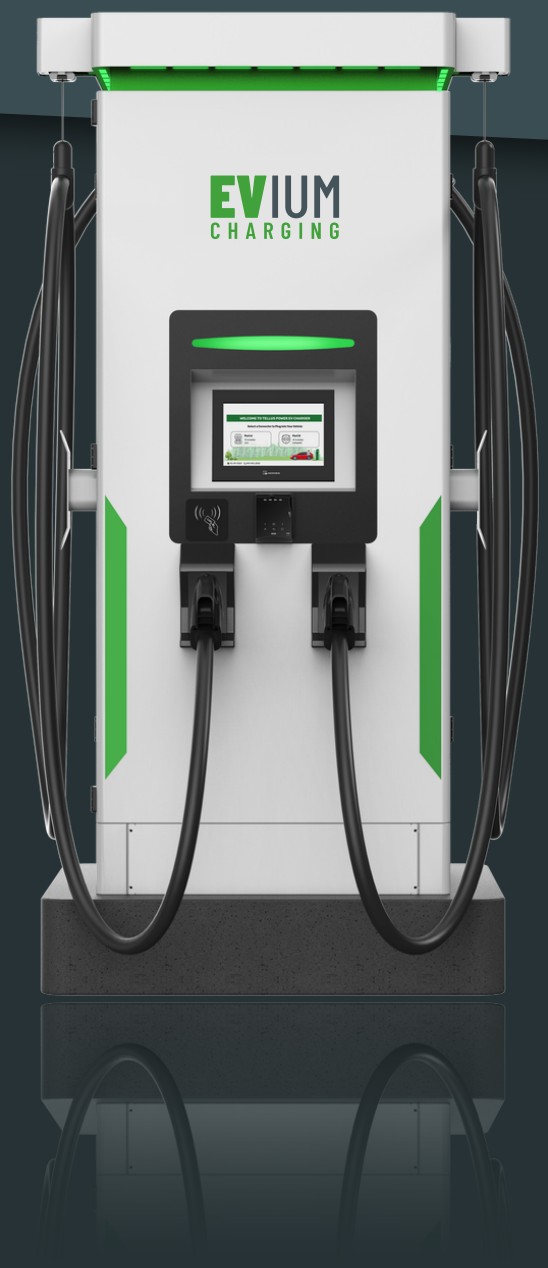

FEATURES

- HPC System with 1000VDC
- Powerful Compact All-In-One Charger
- Simple Air-Cooled Power Modules
- Easy to Maintain
- Parallel Charging Feature
- Liquid Cooled Cables
- OCPP 1.6J
- Credit Card Reader
- Cord Management

(323) 702 - 2400 www.eviumcharging.com david@eviumcharging.com

EVIUM CHARGING

DC FAST CHARGER SPECIFICATIONS

Product Number	TP5-240-480	HPC-240-480
Model Number	TP-EVPD-240kW	
Maximum Power	240 kW	
Input Voltage	480V (3P + N + PE) || 60 Hz	
Output Voltage	150 – 1000 VDC	
Max Output Current	Up to 500A	
Input Current || Breaker Rating	320A || 400A	
Power Factor	>0.98	
Efficiency	>94% at nominal output power	
Connector Options	CCS1 and CCS1 CCS1 and CHAdeMO	
CCS Cable	350A Cable	500A Liquid Cooled
CHAdeMO Cable	125A (Standard) Or 200A	
Charging Protocol Standards	Mode 4,IEC-61851,ISO-15118,DIN 70121 || Mode 4, CHAdeMO 0.9,1.0	
Connector Cable Length	CCS - 16 ft (5 m) | CHAdeMO – 16ft (5 m) Cable Retractor Included	CCS - 13 ft (4 m) | CHAdeMO – 16ft (5 m) Cable Retractor Included
Weigh	1653 lbs (750 kg)	
Dimensions (L x D x H)	41'' x 37.4'' x 90''	
Insulation (input – output)	>2.5 kV	
Ingress Protection	NEMA 3S (IP54), IK10	
Operating Temperature	-30°C to 55°C (-22°F to 131°F)	
Altitude	<6,600ft (2,000m)	
Working || Storage Humidity	≤ 95% RH || ≤ 99% RH (Non-condensing)	
Display	10'' touch screen	
Communication || Protocol	OCPP 1.6J	
Access Control	RFID : ISO/IEC 14443A/B | Credit Card Reader (Optional)	
Metering	DC kWh meter per each connector	
Power Electronics Cooling	Air Cooled	
Electrical Safety: GFCI	RCD 20 mA Type A	
Electrical Safety: Surge Protection	20 kA	
Electrical Safety General	Over Voltage, Under Voltage, Over Current, Missing Ground	
Electrical Safety: Output Short	Output power disabled when output is short circuited	
Electrical Safety Temperature	Temperature Sensors @ Charge Coupler and Power Electronics	
Emergency Stop	Disables output power with emergency stop button	
Regulatory Compliance	UL-2202 || EMC: EN 61000-6-1:2007, EN 61000-6-3:2007/A1:2011/AC:2012	

240kW Model

Intertek

(323) 702 - 2400 www.eviumcharging.com david@eviumcharging.com