


MODERN

Robotic Screw Driving

Best New



Screw Driving Technology

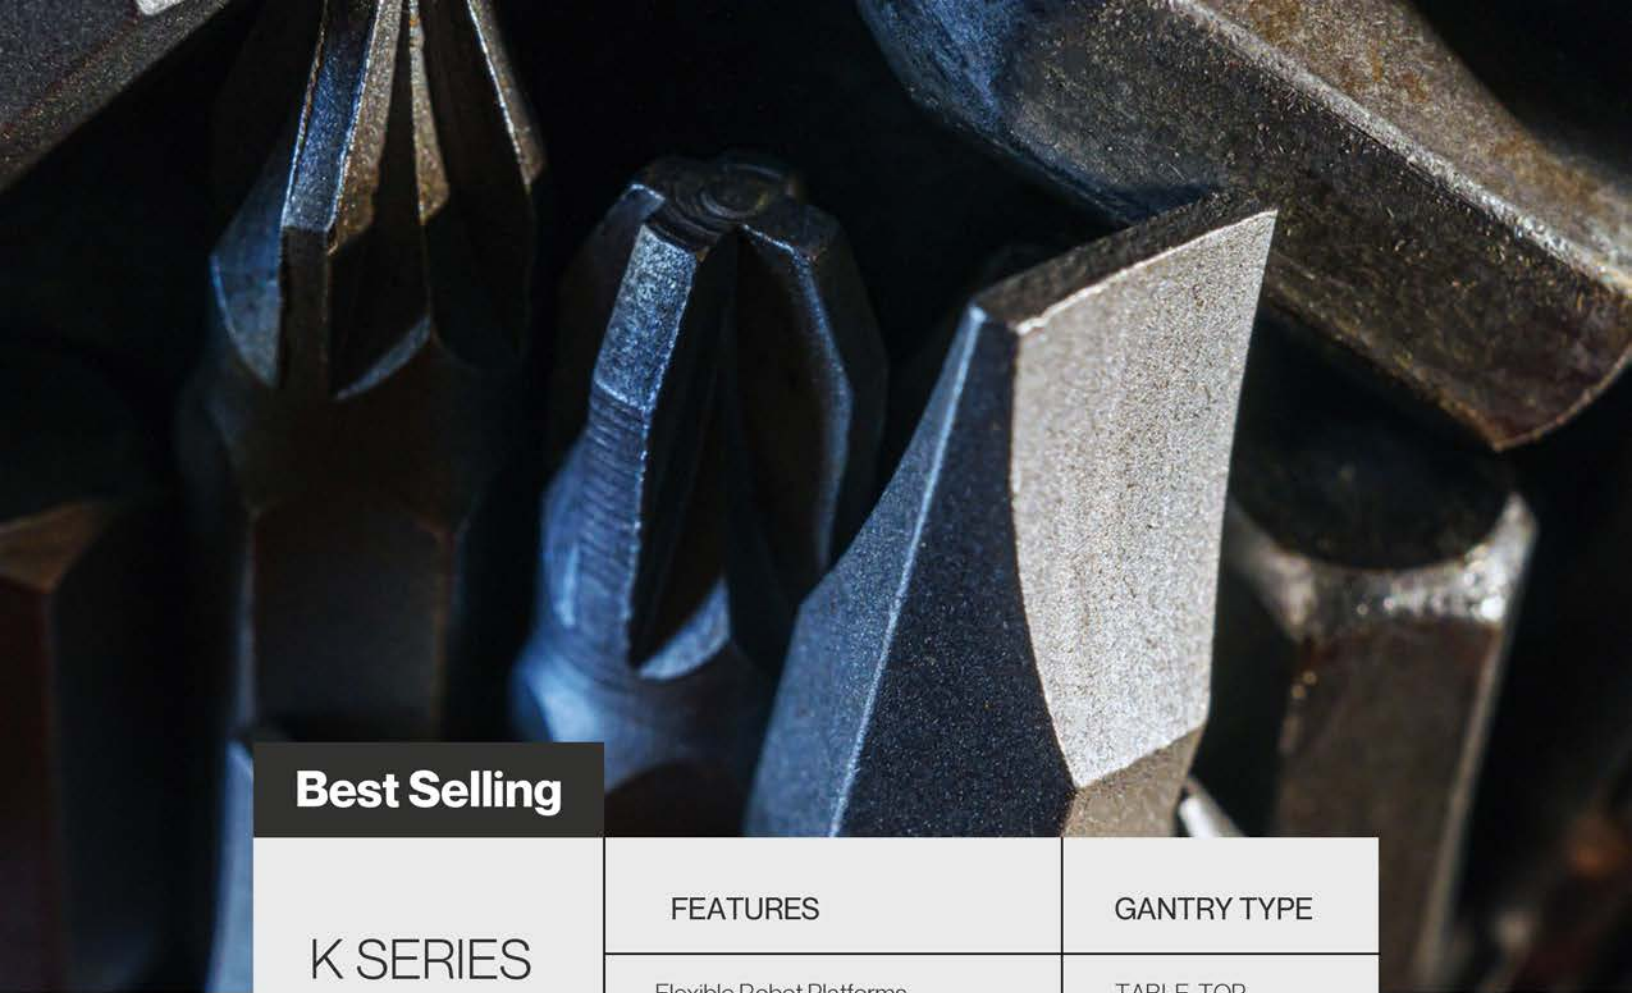

Best Selling	FEATURES	GANTRY TYPE
K SERIES		TABLE-TOP

Flexible Robot Platforms
Smooth Screw Fastening
Torque Monitoring Software


Built on Torque. Driven by Intelligence.

PROMATION's Robotic Screw Driving Solutions redefine precision and control in automated assembly. Engineered for repeatability, accuracy, and long-term reliability, each system integrates advanced motion control, intelligent torque monitoring, and industrial-grade fastening technology to ensure every fastener is driven to spec—every cycle, every location.

From compact benchtop cells to fully automated in-line platforms, PROMATION delivers screw driving systems with real-time torque and angle verification, closed-loop process control, and off-the-shelf network connectivity for seamless integration into modern smart-factory environments. With built-in diagnostics, data logging, and flexible programming, our solutions provide complete process transparency while adapting effortlessly to high-mix, high-volume production demands.

Designed and built with the same commitment to innovation, reliability, and craftsmanship that defines every PROMATION system, our robotic screw driving platforms empower manufacturers to increase throughput, eliminate fastening defects, and maintain uncompromising quality—at scale.

WWW.PROMATIONUSA.COM

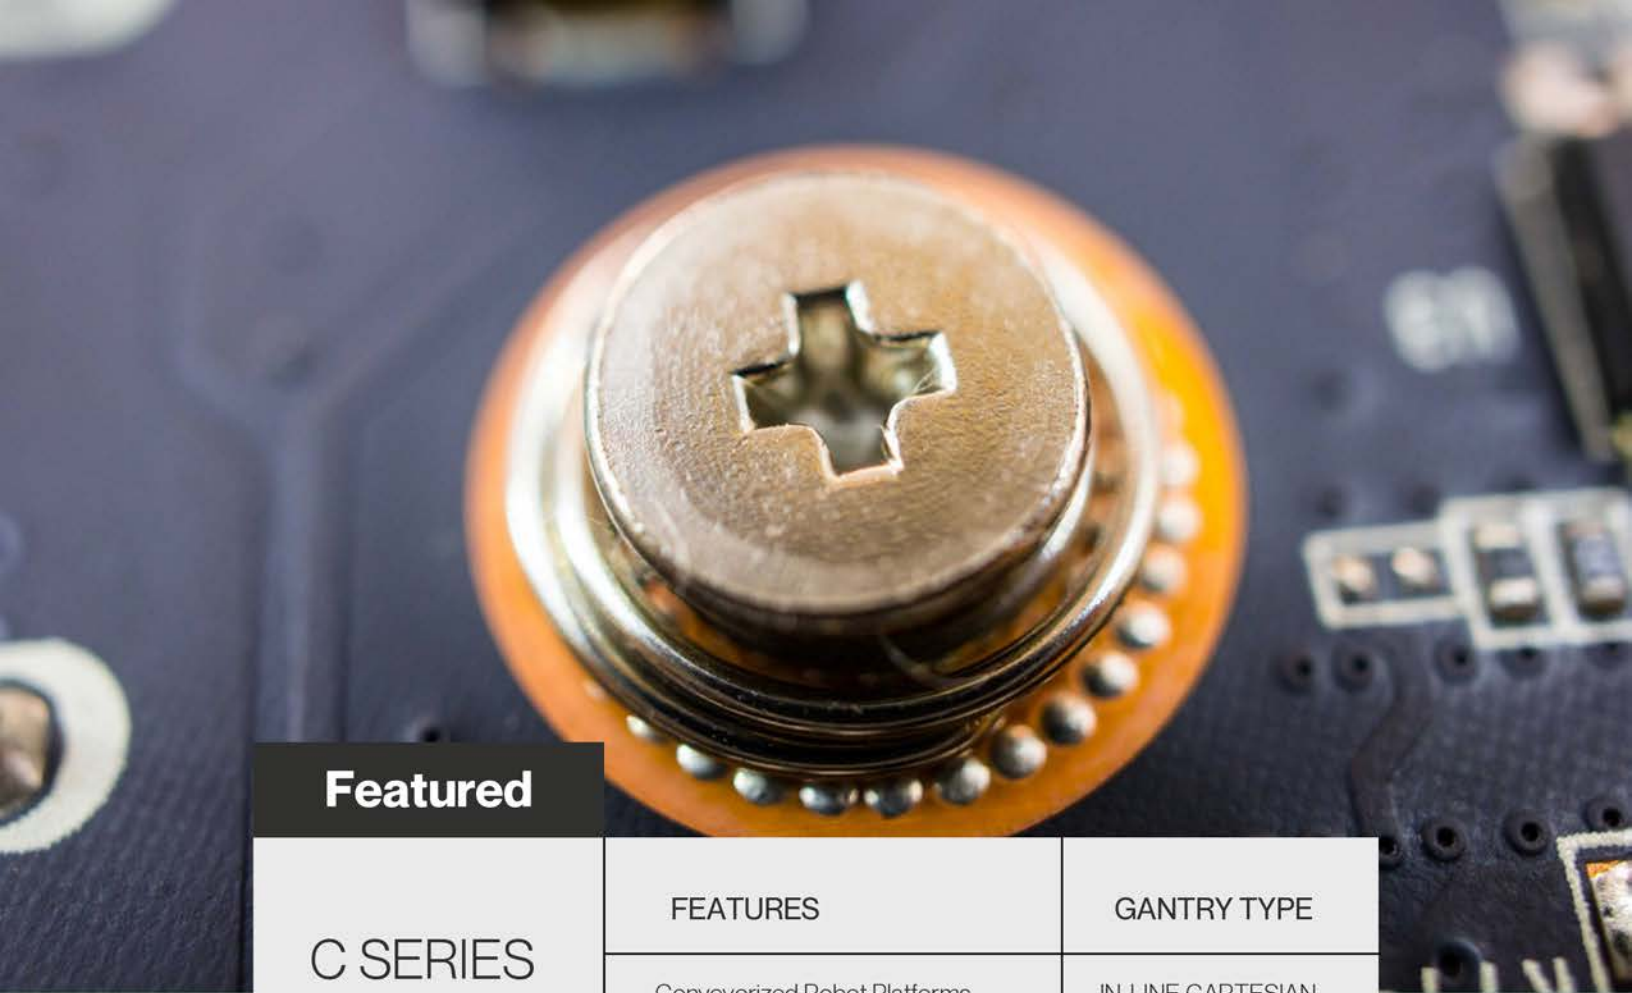

Featured		
C SERIES	FEATURES	GANTRY TYPE
	Conveyorized Robot Platforms High Volume Manufacturing Torque Monitoring Software	IN-LINE CARTESIAN

Precision Fastening: In Motion

The C Series brings continuous-flow efficiency to high-demand fastening environments, delivering precision, speed, and consistency within a fully automated in-line screw driving architecture. Purpose-built for SMT and mixed-technology assembly, each system leverages intelligent torque monitoring, advanced motion control, and real-time process feedback to ensure every fastener is driven to exact specification.

Engineered for seamless integration, the C Series eliminates manual fastening bottlenecks and establishes a repeatable, high-performance workflow that scales effortlessly with production demands. Stability, accuracy, and uptime are at the core—enabling manufacturers to maximize throughput while maintaining uncompromising fastening quality and traceability.

With robust construction, closed-loop torque and angle verification, off-the-shelf network connectivity, and flexible programming, the In-Line Screw Driving Series empowers operations to move faster, assemble smarter, and maintain superior fastening integrity across every run.

C Series. In-Line Screw Driving



PROMATION's in-line robotic screw driving solutions are engineered to elevate every stage of your assembly process. By combining precision motion control, intelligent torque monitoring, and automated process verification, these systems eliminate manual variability and deliver consistent, spec-driven fastening across even the most demanding production environments.


Designed for seamless integration into SMT and mixed-technology lines, our platforms provide real-time torque and angle control, optimized cycle times, and repeatable fastening accuracy—hour after hour, shift after shift. The result is a perfectly balanced solution that improves yield, enhances traceability, and sets a new benchmark for efficiency and reliability in modern electronics manufacturing.

ROBOTIC SCREW DRIVING

C-100

C Series In-Line Screw Driving Work Cells deliver continuous, conveyorized product flow to maximize cycle efficiency and productivity. Engineered for torque-verified fastening and uninterrupted operation, each system is built to keep production moving—without compromise.

Optional dynamic vision alignment ensures precise fastener location and repeatable accuracy, even in high-mix or variable assemblies.




**C
SERIES**



Machine Specifications

Model		PROMATION C-100
Number of controllable axis		3
Screw Driving Method		Air Vacuum / Air Blow -Through
Voltage		100-240V AC
Movement range	X/Y Axis	400mm / 500mm
	Z Axis	100mm
Moving speed	X/Y Axis	(X/Y) 0.1~1000mm/sec
	Z Axis	0.1~300mm/sec
Repeatability	X/Y/Z Axis	±0.01mm
Working Area	X-Axis	300mm
	Y-Axis	400mm
Conveyor Pass Line Height		950±20mm
Size (W*D*H)		800mm x 1350mm x 1650mm
Equipment Weight		120kg

C-100 Dimensions



Bottom-Side Pallet Return
Systems Available



Optional Accessories



High Capacity
Screw Feeder



Torque Testing Station



Torque Monitoring
Solution

Table-Top Series. Compact Precision.



Table-top screw driving platforms deliver high-precision fastening in a compact, cost-effective footprint—bringing advanced robotic fastening technology to environments where space, flexibility, and efficiency matter most. Engineered with precision motion control and intelligent torque monitoring, these benchtop systems ensure consistent, repeatable fastening without the complexity of larger automation.

Ideal for prototyping, low- to mid-volume production, and specialized assemblies, our table-top solutions streamline operations by eliminating manual variability and enhancing process control.

PROMATION brings world-class robotic screw driving performance into a compact, agile, and highly capable format—designed to scale as your production evolves.

ROBOTIC SOLDERING

ET72H3KA

K Series Screw Driving Solutions deliver powerful fastening capability paired with precise process control. Featuring high-performance electric screwdrivers with closed-loop torque and angle monitoring, industrial-grade drive electronics, and flexible tooling configurations, the K Series provides ultra-reliable fastening for manufacturers seeking adaptability and uncompromising control.


**H
SERIES**



Machine Specifications

Model		PROMATION ET72H3KA
Number of controllable axis		3
Screw Driving Method		Air Vacuum
Voltage		100-240V AC
Movement range	X/Y Axis	200mm / 300mm
	Z Axis	100mm
Moving speed	X/Y Axis	(X/Y) 0.1~1000mm/sec
	Z Axis	0.1~300mm/sec
Repeatability	X/Y/Z Axis	±0.01mm
Working Area	X-Axis	160mm
	Y-Axis	270mm
Size (W*D*H)		400mm x 630mm x 800mm
Equipment Weight		65kg

Machine Dimensions

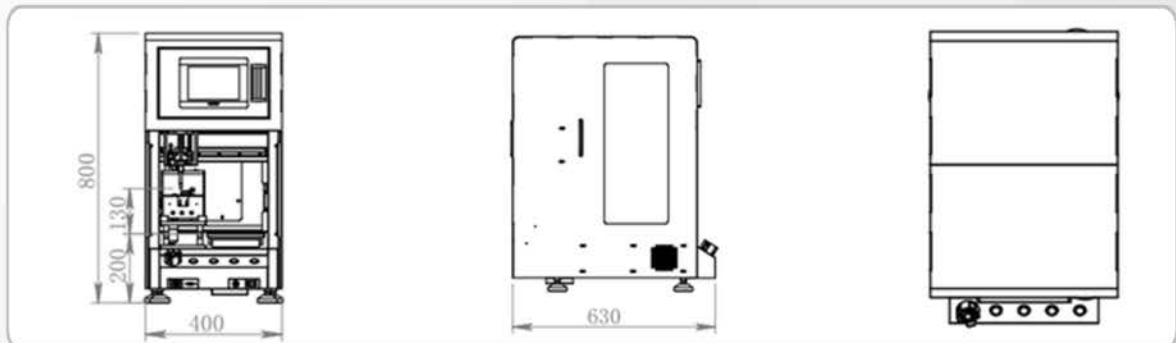

Optional Accessories



High Capacity
Screw Feeder



Torque Testing Station



Torque Monitoring
Solution

ROBOTIC SOLDERING

ET7383K


K Series Screw Driving Solutions deliver powerful fastening capability paired with precise process control. Featuring high-performance electric screwdrivers with closed-loop torque and angle monitoring, industrial-grade drive electronics, and flexible tooling configurations, the K Series provides ultra-reliable fastening for manufacturers seeking adaptability and uncompromising control.



Machine Specifications

Model		7383K	7483K	7583KA	7583K	7683KA
Number of controllable axis		3	3	3	3	3
Power consumption		300W	300W	300W	300W	300W
Screw Driving Method		Air Vacuum	Air Vacuum	Air Vacuum	Air Vacuum	Air Vacuum
Movement range	X/Y Axis	300/300mm	400/400mm	500/400mm	500/500mm	600/400mm
	Z Axis	100mm	100mm	100mm	100mm	100mm
	R Axis	---	---	---	---	---
Moving speed	X/Y Axis	0.1~1000mm/sec	0.1~1000mm/sec	0.1~1000mm/sec	0.1~1000mm/sec	0.1~1000mm/sec
	Z Axis	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec
	R Axis	---	---	---	---	---
Repeatability	X/Y/Z Axis	± 0.02 mm	± 0.02 mm	± 0.02 mm	± 0.02 mm	± 0.02 mm
Working Area	X/Y Axis	260mm x 270mm	360mm x 370mm	460mm x 370mm	460mm x 470mm	560mm x 370mm
Size (W*D*H)		650x590x810mm	750x690x810mm	850x690x810mm	850x790x810mm	950x690x810mm
Weight		68kg	75kg	88kg	95kg	95kg

Machine Dimensions

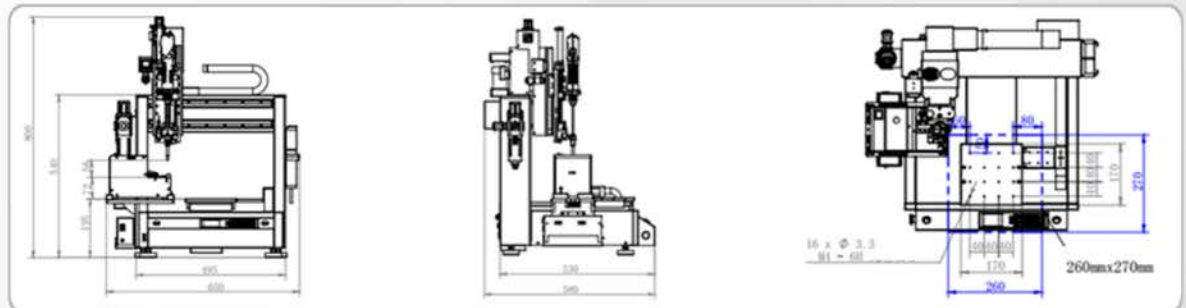

Optional Accessories



High Capacity
Screw Feeder



Torque Testing Station



Torque Monitoring
Solution

ROBOTIC SOLDERING

ET7383KC


K Series Screw Driving Solutions deliver powerful fastening capability paired with precise process control. Featuring high-performance electric screwdrivers with closed-loop torque and angle monitoring, industrial-grade drive electronics, and flexible tooling configurations, the K Series provides ultra-reliable fastening for manufacturers seeking adaptability and uncompromising control.



Machine Specifications

Model		7383KC	7483KC	7583KAC	7583KC	7683KAC
Number of controllable axis		3	3	3	3	3
Power consumption		300W	300W	300W	300W	300W
Screw Driving Method		Air Blow	Air Blow	Air Blow	Air Blow	Air Blow
Movement range	X/Y Axis	300/300mm	400/400mm	500/400mm	500/500mm	600/400mm
	Z Axis	100mm	100mm	100mm	100mm	100mm
	R Axis	---	---	---	---	---
Moving speed	X/Y Axis	0.1~1000mm/sec	0.1~1000mm/sec	0.1~1000mm/sec	0.1~1000mm/sec	0.1~1000mm/sec
	Z Axis	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec
	R Axis	---	---	---	---	---
Repeatability	X/Y/Z Axis	± 0.02 mm	± 0.02 mm	± 0.02 mm	± 0.02 mm	± 0.02 mm
Working Area	X/Y Axis	260mm x 270mm	360mm x 370mm	460mm x 370mm	460mm x 470mm	560mm x 370mm
Size (W*D*H)		650x590x810mm	750x690x810mm	850x690x810mm	850x790x810mm	950x690x810mm
Weight		68kg	75kg	88kg	95kg	95kg

Machine Dimensions

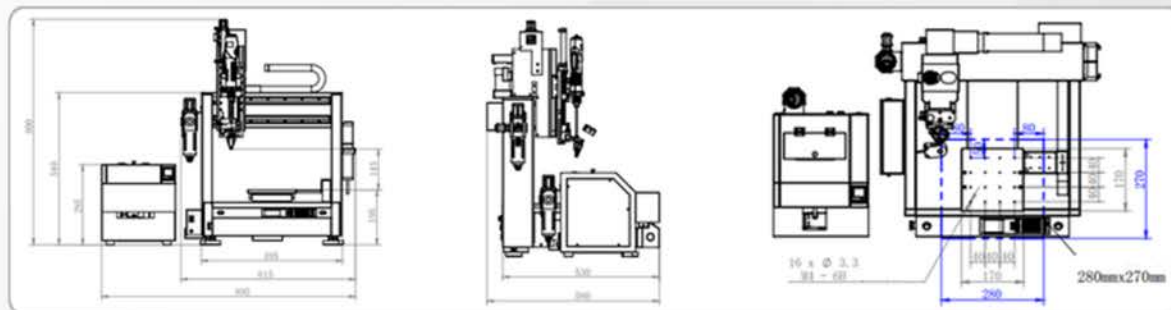

Optional Accessories



High Capacity
Screw Feeder



Torque Testing Station



Torque Monitoring
Solution

ET7583KYA


K Series Screw Driving Solutions deliver powerful fastening capability paired with precise process control. Featuring high-performance electric screwdrivers with closed-loop torque and angle monitoring, industrial-grade drive electronics, and flexible tooling configurations, the K Series provides ultra-reliable fastening for manufacturers seeking adaptability and uncompromising control.



Machine Specifications

Model		7583KYA	7683KYA
Number of controllable axis		4	4
Power consumption		400W	400W
Screw Driving Method		Air Vacuum	Air Vacuum
Movement range	X/Y Axis	500/400mm	600/400mm
	Z Axis	100mm	100mm
	R Axis	---	---
Moving speed	X/Y Axis	0.1~1000mm/sec	0.1~1000mm/sec
	Z Axis	0.1~300mm/sec	0.1~300mm/sec
	R Axis	---	---
Repeatability	X/Y/Z Axis	± 0.02 mm	± 0.02 mm
Working Area	X/Y Axis	170mm x 370mm (x2)	220mm x 370mm (x2)
Size (W*D*H)		820x690x810mm	920x690x810mm
Weight		95kg	97kg

Machine Dimensions

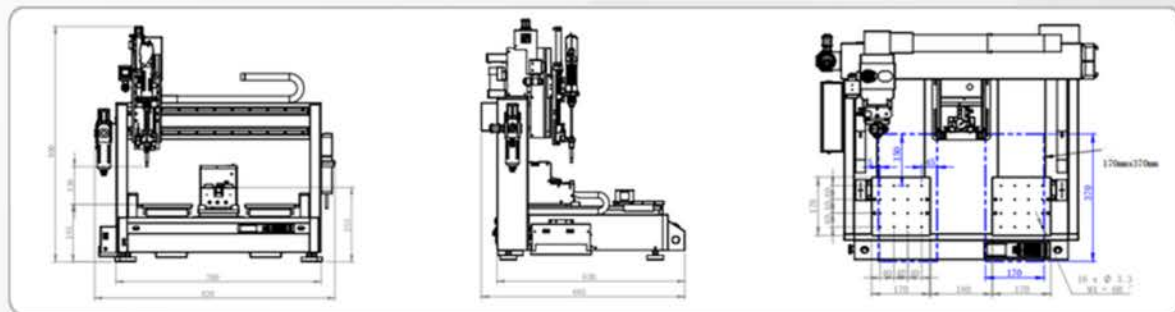

Optional Accessories



High Capacity Screw Feeder



Torque Testing Station



Torque Monitoring Solution

ROBOTIC SOLDERING

ET7583KYAC


K Series Screw Driving Solutions deliver powerful fastening capability paired with precise process control. Featuring high-performance electric screwdrivers with closed-loop torque and angle monitoring, industrial-grade drive electronics, and flexible tooling configurations, the K Series provides ultra-reliable fastening for manufacturers seeking adaptability and uncompromising control.



Machine Specifications

Model		7583KYAC	7683KYAC
Number of controllable axis		4	4
Power consumption		400W	400W
Screw Driving Method		Air Blow	Air Blow
Movement range	X/Y Axis	500/400mm	600/400mm
	Z Axis	100mm	100mm
	R Axis	---	---
Moving speed	X/Y Axis	0.1~1000mm/sec	0.1~1000mm/sec
	Z Axis	0.1~300mm/sec	0.1~300mm/sec
	R Axis	---	---
Repeatability	X/Y/Z Axis	± 0.02 mm	± 0.02 mm
Working Area	X/Y Axis	170mm x 370mm (x2)	220mm x 370mm (x2)
Size (W*D*H)		820x690x810mm	920x690x810mm
Weight		95kg	97kg

Machine Dimensions

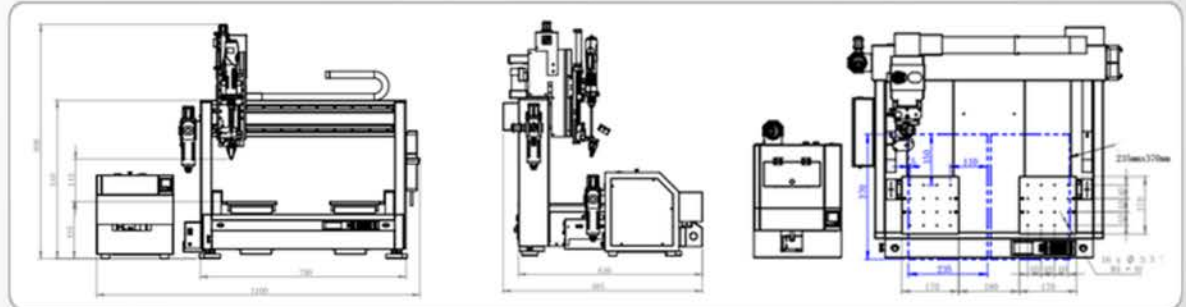

Optional Accessories



High Capacity
Screw Feeder



Torque Testing Station



Torque Monitoring
Solution

ET7483KXZ


K Series Screw Driving Solutions deliver powerful fastening capability paired with precise process control. Featuring high-performance electric screwdrivers with closed-loop torque and angle monitoring, industrial-grade drive electronics, and flexible tooling configurations, the K Series provides ultra-reliable fastening for manufacturers seeking adaptability and uncompromising control.



Machine Specifications

Model		7483KXZ	7583KXZA	7583KXZ	7683KXZA
Number of controllable axis		5	5	5	5
Power consumption		500W	500W	500W	500W
Screw Driving Method		Air Vacuum	Air Vacuum	Air Vacuum	Air Vacuum
Movement range	X/Y Axis	400/400mm	500/400mm	500/500mm	600/400mm
	Z Axis	150mm	150mm	150mm	150mm
	R Axis	---	---	---	---
Moving speed	X/Y Axis	0.1~1000mm/sec	0.1~1000mm/sec	0.1~1000mm/sec	0.1~1000mm/sec
	Z Axis	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec
	R Axis	---	---	---	---
Repeatability	X/Y/Z Axis	± 0.02 mm	± 0.02 mm	± 0.02 mm	± 0.02 mm
Working Area	X/Y Axis	360mm x 370mm	440mm x 370mm	440mm x 470mm	540mm x 370mm
Size (W*D*H)		810x690x860mm	910x690x850mm	910x790x850mm	1010x690x860mm
Weight		106kg	115kg	120kg	120kg

Machine Dimensions

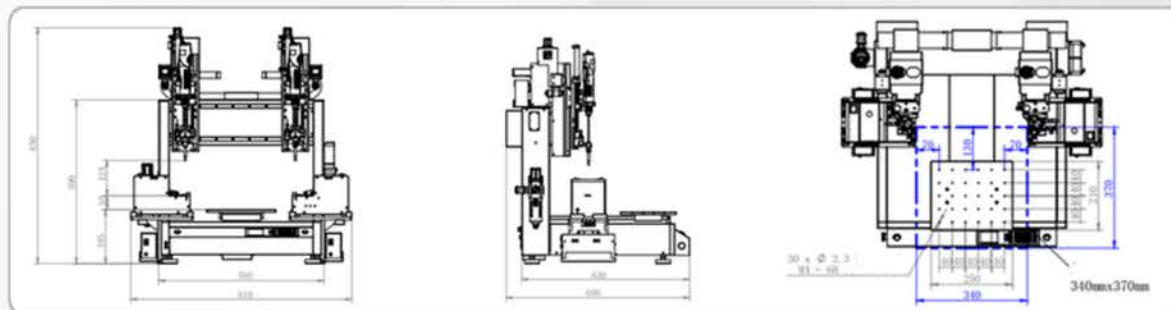

Optional Accessories



High Capacity Screw Feeder



Torque Testing Station



Torque Monitoring Solution

ROBOTIC SOLDERING

ET7483KXZC


K Series Screw Driving Solutions deliver powerful fastening capability paired with precise process control. Featuring high-performance electric screwdrivers with closed-loop torque and angle monitoring, industrial-grade drive electronics, and flexible tooling configurations, the K Series provides ultra-reliable fastening for manufacturers seeking adaptability and uncompromising control.



Machine Specifications

Model		7483KXZC	7583KXZAC	7583KXZC	7683KXZAC
Number of controllable axis		5	5	5	5
Power consumption		500W	500W	500W	500W
Screw Driving Method		Air Blow	Air Blow	Air Blow	Air Blow
Movement range	X/Y Axis	400/400mm	500/400mm	500/500mm	600/400mm
	Z Axis	150mm	150mm	150mm	150mm
	R Axis	---	---	---	---
Moving speed	X/Y Axis	0.1~1000mm/sec	0.1~1000mm/sec	0.1~1000mm/sec	0.1~1000mm/sec
	Z Axis	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec
	R Axis	---	---	---	---
Repeatability	X/Y/Z Axis	± 0.02 mm	± 0.02 mm	± 0.02 mm	± 0.02 mm
Working Area	X/Y Axis	380mm x 370mm	480mm x 370mm	480mm x 470mm	580mm x 370mm
Size (W*D*H)		720x690x860mm	820x690x860mm	820x790x860mm	920x690x860mm
Weight		106kg	115kg	120kg	120kg

Machine Dimensions

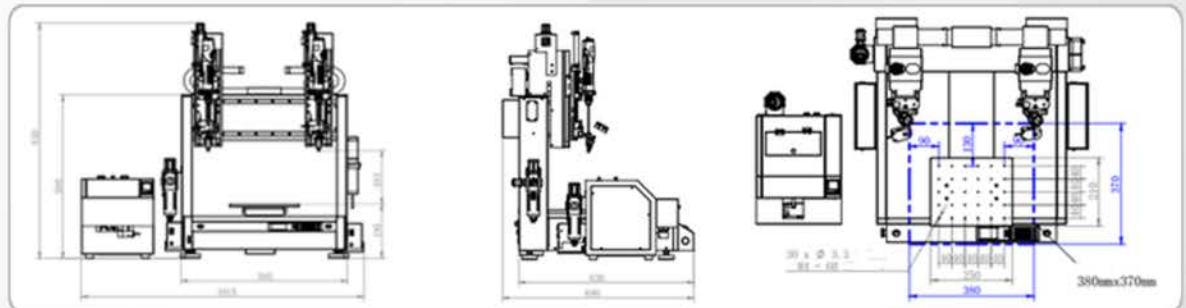

Optional Accessories



High Capacity
Screw Feeder



Torque Testing Station



Torque Monitoring
Solution

ROBOTIC SOLDERING

ET7583KXYZA


K Series Screw Driving Solutions deliver powerful fastening capability paired with precise process control. Featuring high-performance electric screwdrivers with closed-loop torque and angle monitoring, industrial-grade drive electronics, and flexible tooling configurations, the K Series provides ultra-reliable fastening for manufacturers seeking adaptability and uncompromising control.



Machine Specifications

Model		7583KXYZA	7683KXYZA	7783KXYZA
Number of controllable axis		5	5	5
Power consumption		600W	600W	600W
Screw Driving Method		Air Vacuum	Air Vacuum	Air Vacuum
Movement range	X/Y Axis	500/400mm	600/400mm	700/400mm
	Z Axis	150mm	150mm	150mm
	R Axis	---	---	---
Moving speed	X/Y Axis	0.1~1000mm/sec	0.1~1000mm/sec	0.1~1000mm/sec
	Z Axis	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec
	R Axis	---	---	---
Repeatability	X/Y/Z Axis	± 0.02 mm	± 0.02 mm	± 0.02 mm
Working Area	X/Y Axis	180mm x 370mm	230mm x 370mm	280mm x 370mm
Size (W*D*H)		910x690x860mm	1010x690x860mm	1110x690x860mm
Weight		115kg	130kg	140kg

Machine Dimensions

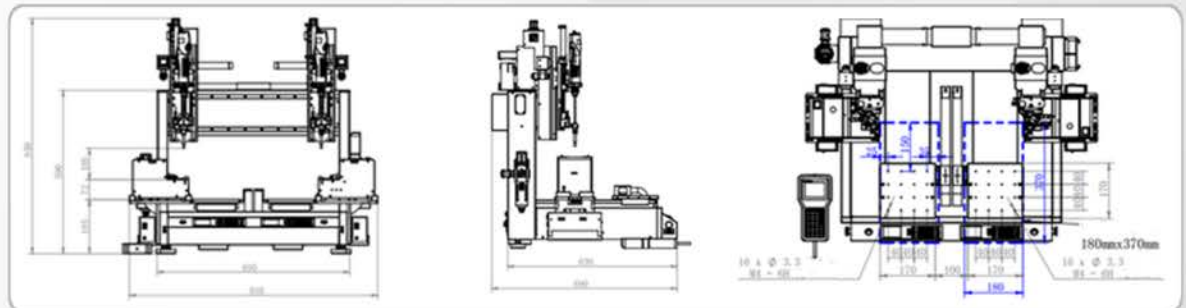

Optional Accessories



High Capacity
Screw Feeder



Torque Testing Station



Torque Monitoring
Solution

ROBOTIC SOLDERING

ET7583KXYZAC

K Series Screw Driving Solutions deliver powerful fastening capability paired with precise process control. Featuring high-performance electric screwdrivers with closed-loop torque and angle monitoring, industrial-grade drive electronics, and flexible tooling configurations, the K Series provides ultra-reliable fastening for manufacturers seeking adaptability and uncompromising control.


**K
SERIES**



Machine Specifications

Model		7583KXYZAC	7683KXYZAC	7783KXYZAC
Number of controllable axis		5	5	5
Power consumption		600W	600W	600W
Screw Driving Method		Air Blow	Air Blow	Air Blow
Movement range	X/Y Axis	500/400mm	600/400mm	700/400mm
	Z Axis	150mm	150mm	150mm
	R Axis	---	---	---
Moving speed	X/Y Axis	0.1~1000mm/sec	0.1~1000mm/sec	0.1~1000mm/sec
	Z Axis	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec
	R Axis	---	---	---
Repeatability	X/Y/Z Axis	± 0.02 mm	± 0.02 mm	± 0.02 mm
Working Area	X/Y Axis	270mm x 370mm	250mm x 370mm	300mm x 370mm
Size (W*D*H)		820x690x860mm	920x690x860mm	1020x690x860mm
Weight		115kg	130kg	140kg

Machine Dimensions

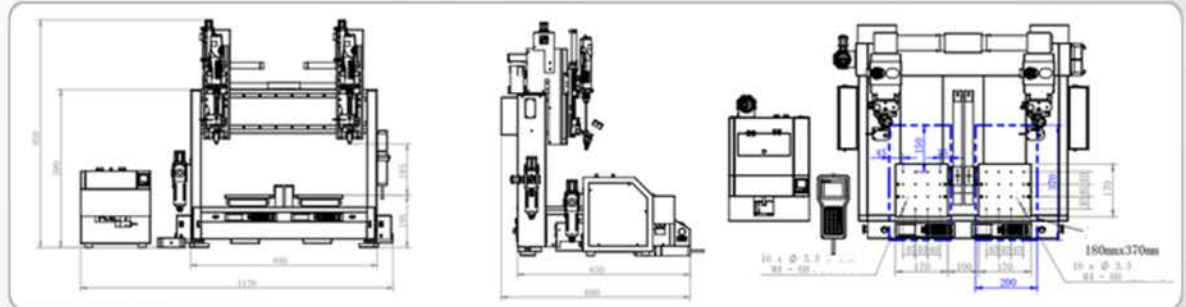

Optional Accessories



High Capacity
Screw Feeder



Torque Testing Station



Torque Monitoring
Solution

ROBOTIC SCREW DRIVING

ET76T3KYA


K Series Screw Driving Solutions deliver powerful fastening capability paired with precise process control. Featuring high-performance electric screwdrivers with closed-loop torque and angle monitoring, industrial-grade drive electronics, and flexible tooling configurations, the K Series provides ultra-reliable fastening for manufacturers seeking adaptability and uncompromising control.



Machine Specifications

Model		PROMATION ET76T3KYA	PROMATION ET76T3KYAC
Number of controllable axis		6	6
Power consumption		600W	600W
Screw Driving Method		Air Vacuum	Air Blow
Movement range	X/Y Axis	600mm / 800mm	600mm / 800mm
	Z Axis	100mm	100mm
	R Axis	300°	300°
Moving speed	X/Y Axis	0.1~1000mm/sec	0.1~1000mm/sec
	Z Axis	0.1~300mm/sec	0.1~300mm/sec
	R Axis	--	--
Repeatable accuracy	X/Y/Z Axis	± 0.01 mm	± 0.01 mm
Maximum payload	Z axis	3kg	3kg
	Platform	8kg	8kg
Working Area		210mm x 265mm	210mm x 265mm
Size (W*D*H)		900x1030x810mm	900x1030x810mm
Weight		180kg	180kg

ET76T3KYA Dimensions

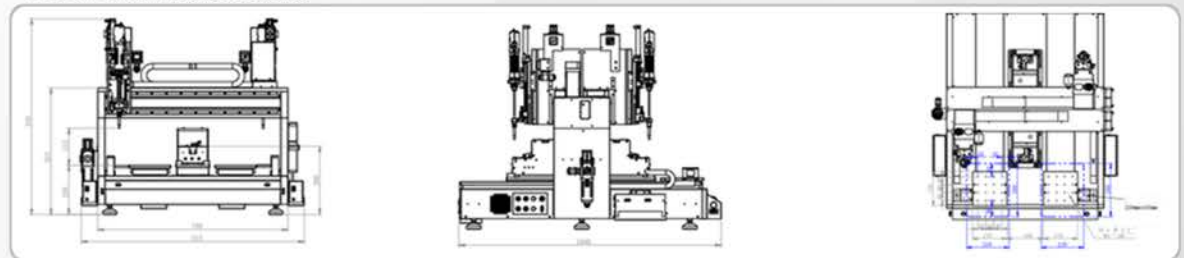

Optional Accessories



High Capacity
Screw Feeder



Torque Testing Station



Torque Monitoring
Solution

Cartesian Series. Structured Motion.



Cartesian-style soldering robots deliver unparalleled accuracy through rigid, linear-axis control—ensuring every motion, every angle, and every solder joint is executed with exacting repeatability. Built for applications demanding consistent path fidelity and stable thermal performance, these systems provide a dependable foundation for high-quality robotic soldering across a wide range of assemblies.

Engineered for versatility, Cartesian platforms support complex multi-point programs, precision-controlled solder deposition, and scalable tooling configurations, making them ideal for both dedicated production and high-mix environments. Their straightforward architecture enables simplified maintenance, rapid integration, and exceptional long-term reliability.

Experience the strength of structured motion—redefine accuracy and repeatability in automated soldering.

ROBOTIC SOLDERING

SN7353K / SN7453KA


S Series Screw Driving Solutions deliver powerful fastening capability paired with precise process control. Featuring high-performance electric screwdrivers with closed-loop torque and angle monitoring, industrial-grade drive electronics, and flexible tooling configurations, the S Series provides ultra-reliable fastening for manufacturers seeking adaptability and uncompromising control.



Machine Specifications

Model		SN7353K	SN7453KA	SN7353KSF	SN7453KASF
Number of controllable axis		4	4	4	4
Power consumption		500W	500W	500W	500W
Screw Driving Method		Air Blow	Air Blow	Air Blow	Air Blow
Movement range	X/Y Axis	300/300mm	400/300mm	300/300mm	400/300mm
	Z Axis	100mm	100mm	100mm	100mm
	R Axis	---	---	---	---
Moving speed	X/Y Axis	0.1~800mm/sec	0.1~800mm/sec	0.1~800mm/sec	0.1~800mm/sec
	Z Axis	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec
	R Axis	---	---	---	---
Repeatability	X/Y/Z Axis	± 0.02 mm	± 0.02 mm	± 0.02 mm	± 0.02 mm
Working Area	X/Y Axis	280mm x 270mm	380mm x 270mm	280mm x 270mm	380mm x 270mm
Size (W*D*H)		690x680x570mm	790x680x570mm	690x680x570mm	790x680x570mm
Motor Configuration		Precision Stepper	Precision Stepper	Servo Motor	Servo Motor

Machine Dimensions

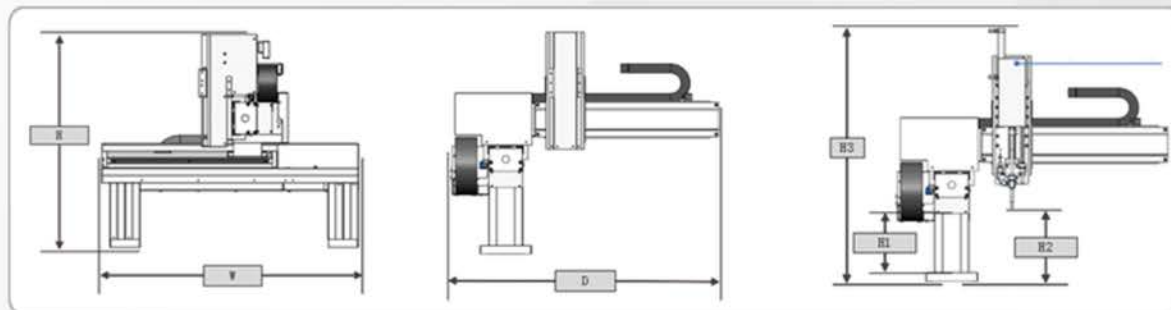

Optional Accessories



High Capacity
Screw Feeder



Torque Testing Station



Torque Monitoring
Solution

Where Style and Function Perfectly Combine



ESC40AC Safety Enclosures

Operator safety remains a top priority.

PROMATION USA is proud to offer a variety of different work cell solutions to meet customer specific safety requirements. Our team specializes in the ability to customize and tailor robot safety enclosures to meet the increasing demands for operator safety; all while offering an elegant and rich exterior- across a variety of robotic work cells.



Safety Enclosure Model	Working Table-Top Size			Maximum Stroke of Applicable Equipment		Compatible Equipment Models
	Width (W)	Depth (D)	Height (H)	X	Y	
ESC40AB	1000mm	900mm	1800mm	500mm	400mm	K SERIES
ESC40AC	900mm	900mm	1800mm	400mm	400mm	K SERIES
				400mm	400mm	
				400mm	400mm	
				300mm	300mm	

PROMATION USA

9900 58th Place
Suite 100
Kenosha, WI 53144 USA



Contact

Phone: 262-764-4832
Website: www.promotionusa.com
Social Media: @promotionusa