


MODERN

Robotic Soldering



Best New

Soldering Technology

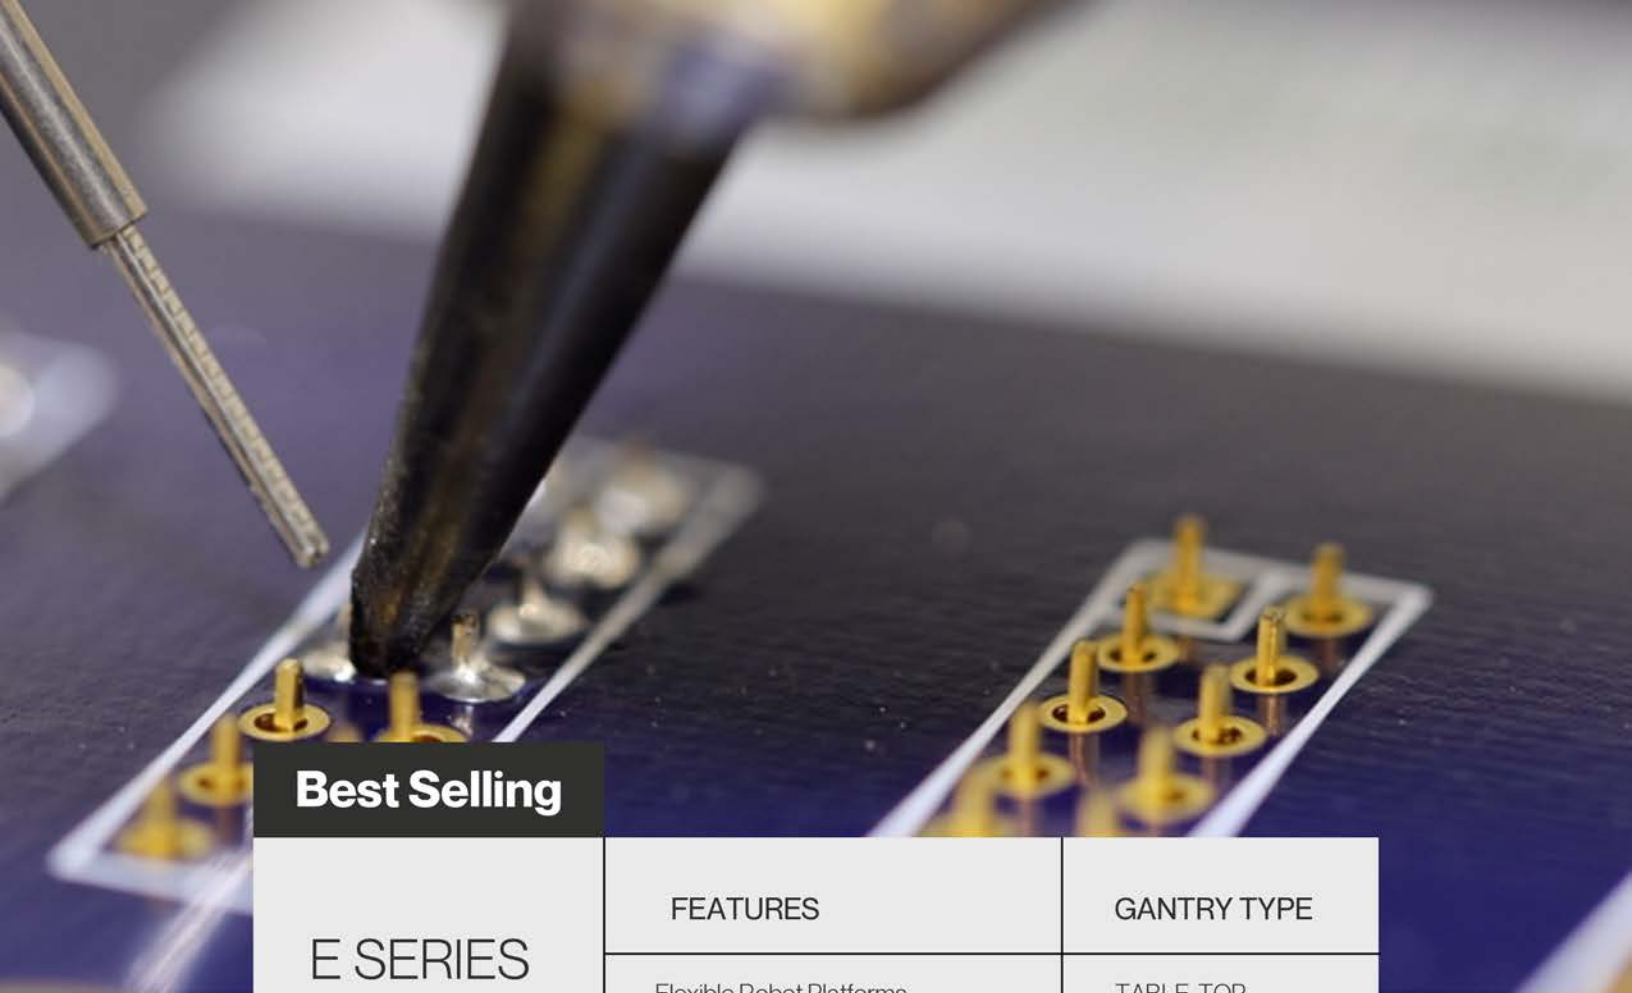


Best Selling		
E SERIES	FEATURES	GANTRY TYPE
	Flexible Robot Platforms Feature Rich Technology Custom Tailored Soldering Solutions	TABLE-TOP

Transforming Manufacturing, Defining Innovation

PROMATION's Robotic Soldering Solutions redefine what's possible in precision electronics assembly. Engineered for consistency, performance, and adaptability, each system combines advanced motion control, industrial-grade soldering technology, and stable process control to deliver flawless results—every cycle, every joint.

From compact benchtop units to fully automated in-line platforms, PROMATION integrates smart process control, real-time diagnostics, and customizable programming to meet the most demanding production environments. Designed and built with the same commitment to innovation, reliability, and craftsmanship that defines every PROMATION system, our robotic soldering line empowers manufacturers to achieve higher throughput, lower defects, and uncompromising quality—at scale.

Experience the future of electronics manufacturing where automation meets artistry—where PROMATION continues to transform manufacturing and define innovation.

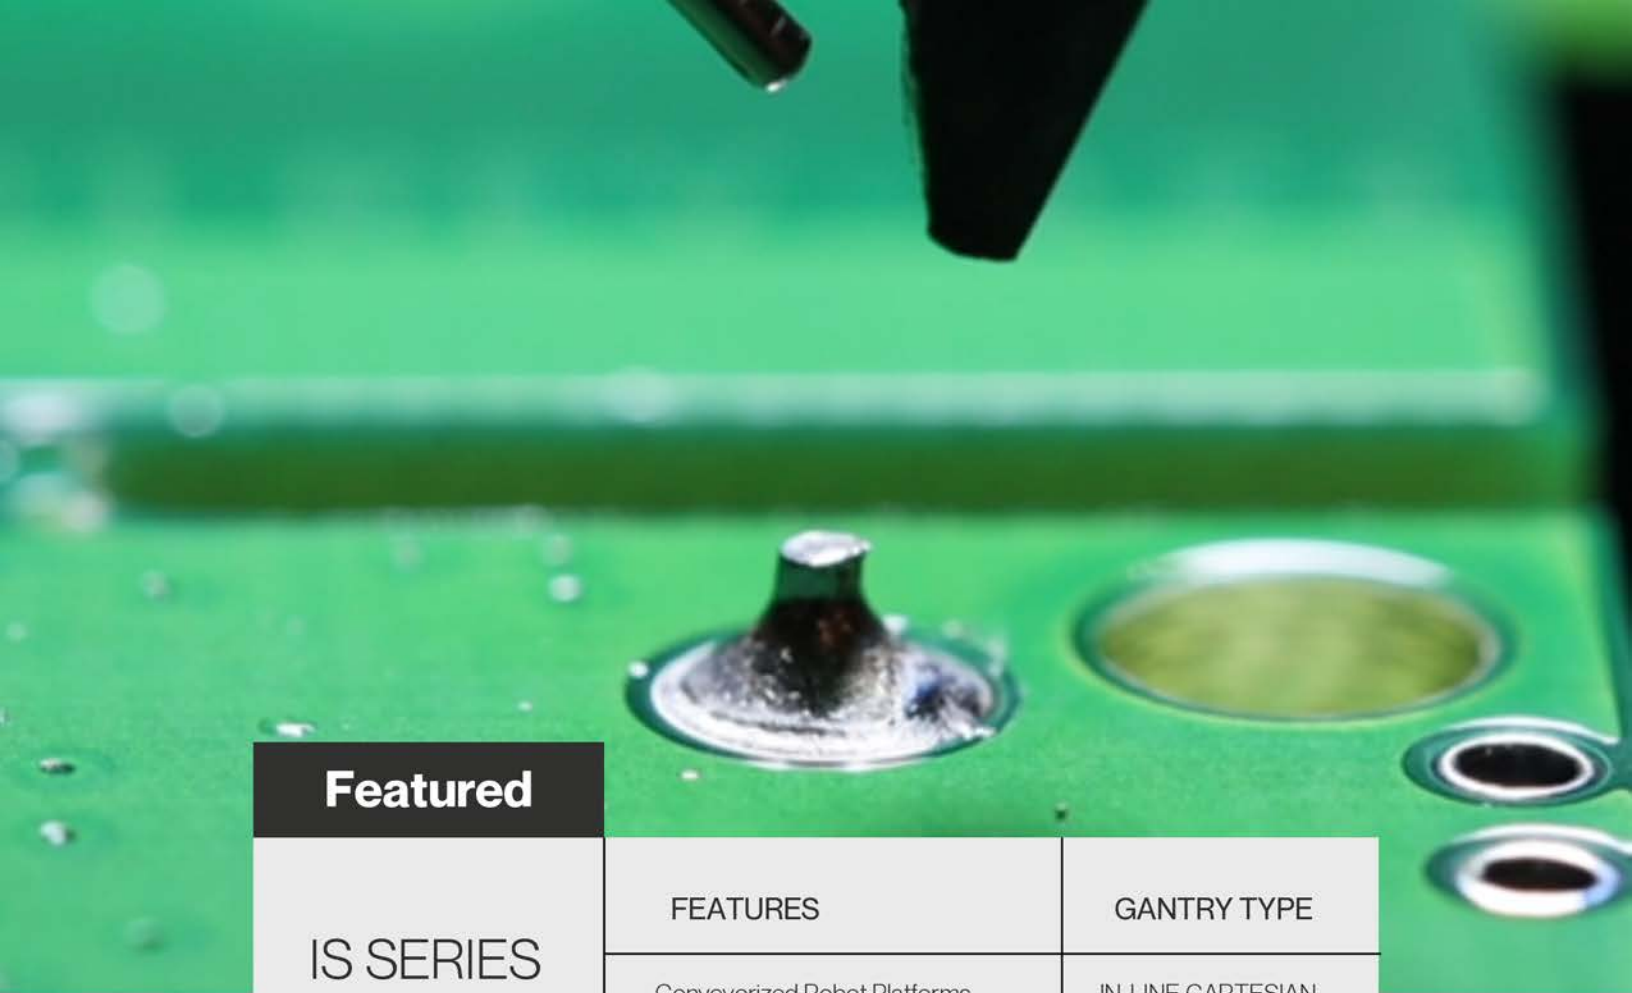

Featured		
IS SERIES	FEATURES	GANTRY TYPE
	Conveyorized Robot Platforms Feature Rich Technology Custom Tailored Soldering Solutions	IN-LINE CARTESIAN

Elevating Throughput: Defining Productivity

The IS Series brings continuous-flow efficiency to high-demand soldering environments, delivering precision, speed, and consistency within a fully automated in-line architecture. Purpose-built for SMT and mixed-technology assembly, each system leverages advanced thermal control, intelligent motion, and automated process feedback to ensure every joint meets the highest standard of quality.

Engineered for seamless integration, the IS Series eliminates manual bottlenecks and establishes a repeatable, high-performance workflow that scales effortlessly with production demands. Stability, accuracy, and uptime are at the core—allowing manufacturers to maximize throughput while maintaining unrivaled process reliability.

With robust construction, and flexible programming the In-Line Soldering Series empowers operations to move faster, produce more, and maintain superior solder integrity across every run.

Experience the next evolution of productivity—where precision engineering meets continuous automation... where the IS Series defines what's possible in high-volume soldering performance.

WWW.PROMATIONUSA.COM

www.promotionusa.com

Boost throughput and
elevate solder quality with
every cycle.

In-Line Series. Defining Productivity



PROMATION's in-line soldering solutions are engineered to elevate every stage of your production flow. By combining precise motion control, intelligent process monitoring, and automated consistency, these systems eliminate manual variability and unlock higher throughput across even the most demanding assemblies.

Designed for seamless integration into SMT and mixed-technology lines, our platforms deliver stable heat profiles, optimized cycle times, and repeatable solder quality—hour after hour, shift after shift. The result is a perfectly balanced solution that improves yield, increases efficiency, and sets a new benchmark for productivity in modern electronics manufacturing.

ROBOTIC SOLDERING

S100-T4

IS Series In-Line Soldering Solutions deliver conveyORIZED product transfer in and out of machine processes to improve cycle time and productivity. Offered with a variety of customizable features and technology, in-line soldering systems are fundamentally built to keep production moving — designed to perform without compromise.



IS
SERIES



Machine Specifications

Model		PROMATION S100-T4
Number of controllable axis		4
Power consumption		800W
Heating controller power consumption		200W
Movement range	X/Y/Z Axis	400mm / 500mm / 100mm
	R Axis	±180mm
Moving speed	X/Y/Z Axis	(X/Y) 0.1~800mm/sec : (Z) 0.1~400mm/sec
	R Axis	0.1~800°/sec
Repeatable accuracy	X/Y/Z/R Axis	±0.01mm
Working Area	X-Axis	300mm
	Y-Axis	370mm
Conveyor Pass Line Height		920±20mm
Size (W*D*H)		800mm x 1350mm x 1650mm
Equipment Weight		700kg

S100-P4 Dimensions

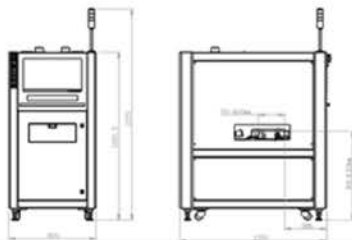

Bottom-Side Pallet Return
Systems Available



Optional Accessories



Upgraded
Power Supply



Solder Tip
Correction



Fume
Extraction



Nitrogen
Generator



Upgraded
Solder Feeder

ROBOTIC SOLDERING

IS
SERIES

S100-P4



IS Series In-Line Soldering Solutions deliver conveyORIZED product transfer in and out of machine processes to improve cycle time and productivity. Offered with a variety of customizable features and technology, in-line soldering systems are fundamentally built to keep production moving — designed to perform without compromise.



Machine Specifications

Model		PROMATION S100-P4
Number of controllable axis		4
Power consumption		800W
Heating controller power consumption		200W
Movement range	X/Y Axis	400mm / 500mm
	Z Axis	100mm
Moving speed	X/Y Axis	0.1~800mm/sec
	Z Axis	0.1~400mm/sec
Repeatable accuracy	X/Y/Z Axis	±0.01mm
Working Area	X-Axis	300mm
	Y-Axis	370mm
Conveyor Pass Line Height		920±20mm
Size (W*D*H)		800mm x 1350mm x 1650mm
Equipment Weight		700kg

S100-P4 Dimensions

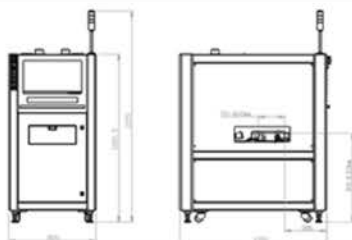

Bottom-Side Pallet Return Systems Available



Optional Accessories



Upgraded Power Supply



Solder Tip Correction



Fume Extraction



Nitrogen Generator



Upgraded Solder Feeder

Table-Top Series. Compact Precision.



Table-top soldering platforms deliver high-accuracy performance in a compact, cost-effective footprint—bringing advanced robotic soldering technology to environments where space, flexibility, and efficiency matter most. Engineered with precision motion control; these benchtop units provide consistent, repeatable solder quality without the complexity of larger automation.

Ideal for prototyping, small-batch production, and specialized assemblies, our table-top solutions streamline operations by eliminating manual variability and enhancing process control. Operators gain unmatched ease of use, fast setup, and dependable results while maintaining the versatility required for diverse product mixes.

PROMATION brings world-class soldering performance into a compact, agile, and highly capable format.

ROBOTIC SOLDERING

ET9394F/9494F


F Series Soldering Solutions deliver powerful soldering tools and precise process controls.. Featuring a robust 180-watt hot nitrogen ready soldering iron and an industrial-grade power supply, this system provides ultra high-performance soldering for electronics manufacturers seeking flexibility and superior soldering control. Discover unmatched performance where platform flexibility meets beautifully crafted engineering.




Machine Specifications

Model		PROMATION ET9394F	PROMATION ET9494F
Number of controllable axis		4	4
Power consumption		600W	600W
Heating controller power consumption		180W	180W
Movement range	X/Y Axis	300mm	400mm
	Z Axis	100mm	100mm
	R Axis	300°	300°
Moving speed	X/Y Axis	0.1~800mm/sec	0.1~800mm/sec
	Z Axis	0.1~300mm/sec	0.1~300mm/sec
	R Axis	0.1~800°/sec	0.1~800°/sec
Repeatable accuracy	X/Y/R/Z Axis	± 0.01 mm	± 0.01 mm
Maximum payload	Z axis	3kg	3kg
	Platform	8kg	8kg
Operating range		260*300mm	340*400mm
Size (W*D*H)		595x610x897mm	695x710x897mm
Weight		70kg	80kg

ET9394F Dimensions

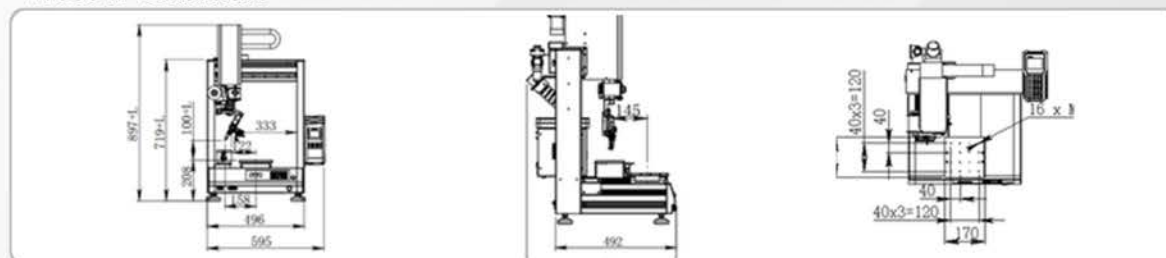

ET9494F Dimensions

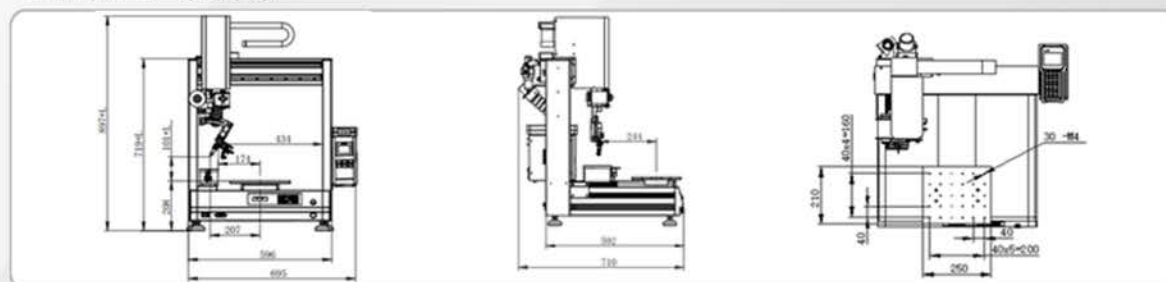

ROBOTIC SOLDERING

ET9594FYA


F Series Soldering Solutions deliver powerful soldering tools and precise process controls.. Featuring a robust 180-watt hot nitrogen ready soldering iron and an industrial-grade power supply, this system provides ultra high-performance soldering for electronics manufacturers seeking flexibility and superior soldering control. Discover unmatched performance where platform flexibility meets beautifully crafted engineering.



Machine Specifications

Model		PROMATION ET9594FYA
Number of controllable axis		4
Power consumption		600W
Heating controller power consumption		180W
Movement range	X/Y Axis	500mm/400mm
	Z Axis	100mm
	R Axis	300°
Moving speed	X/Y Axis	0.1~800mm/sec
	Z Axis	0.1~300mm/sec
	R Axis	0.1~800°/sec
Repeatable accuracy	X/Y/R/Z Axis	± 0.01 mm
Maximum payload	Z axis	3kg
	Platform	8kg
Operating range		200mmx400mm (Dual Slide)
Size (W*D*H)		795x710x897mm
Weight		90kg

ET9594FYA Dimensions

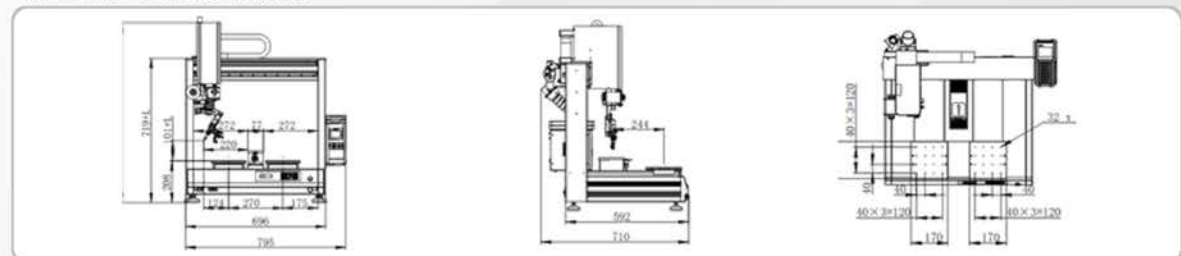

Optional Accessories



ROBOTIC SOLDERING

ET9393E/9493E


E Series Soldering Solutions deliver powerful soldering tools and precise process controls.. Featuring a robust 150-watt hot nitrogen ready soldering iron and an industrial-grade power supply, this system provides superior soldering for electronics manufacturers seeking a perfect balance of performance and price. Explore our most popular and best selling soldering robot series: The E Series.




Machine Specifications

Model		PROMATION ET9393E	PROMATION ET9493E
Number of controllable axis		3	3
Power consumption		500W	500W
Heating controller power consumption		150W	150W
Movement range	X/Y Axis	300mm	400mm
	Z Axis	100mm	100mm
	R Axis	---	---
Moving speed	X/Y Axis	0.1~800mm/sec	0.1~800mm/sec
	Z Axis	0.1~300mm/sec	0.1~300mm/sec
	R Axis	---	---
Repeatable accuracy	X/Y/Z Axis	± 0.01 mm	± 0.01 mm
Maximum payload	Z axis	5kg	5kg
	Platform	8kg	8kg
Operating range		240*300mm	340*400mm
Size (W*D*H)		595x590x702mm	695x690x700mm
Weight		60kg	70kg

ET9393E Dimensions

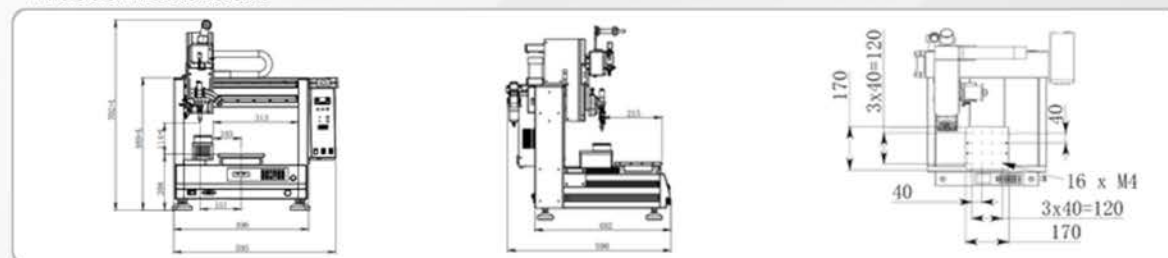

ET9493E Dimensions

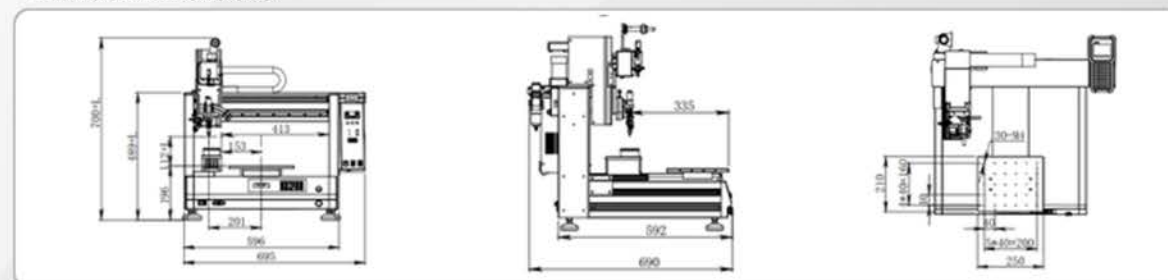

ROBOTIC SOLDERING

ET9593EYA




E Series Soldering Solutions deliver powerful soldering tools and precise process controls.. Featuring a robust 150-watt hot nitrogen ready soldering iron and an industrial-grade power supply, this system provides superior soldering for electronics manufacturers seeking a perfect balance of performance and price. Explore our most popular and best selling soldering robot series: The E Series.



Machine Specifications

Model		PROMATION ET9593EYA
Number of controllable axis		3
Power consumption		500W
Heating controller power consumption		150W
Movement range	X/Y Axis	500mm/400mm
	Z Axis	100mm
	R Axis	---
Moving speed	X/Y Axis	0.1~800mm/sec
	Z Axis	0.1~300mm/sec
	R Axis	---
Repeatable accuracy	X/Y/Z Axis	± 0.01 mm
Maximum payload	Z axis	5kg
	Platform	8kg
Operating range		200mmx400mm (Dual Slide)
Size (W*D*H)		795x689x700
Weight		80kg

ET9593EYA Dimensions



Optional Accessories



Upgraded Power Supply



Solder Tip Correction



Fume Extraction



Nitrogen Generator



Upgraded Solder Feeder

ROBOTIC SOLDERING

ET9384E/9484E

E Series Soldering Solutions deliver powerful soldering tools and precise process controls.. Featuring a robust 150-watt hot nitrogen ready soldering iron and an industrial-grade power supply, this system provides superior soldering for electronics manufacturers seeking a perfect balance of performance and price. Explore our most popular and best selling soldering robot series: The E Series.



Machine Specifications

Model		PROMATION ET9384E	PROMATION ET9484E
Number of controllable axis		4	4
Power consumption		600W	600W
Heating controller power consumption		150W	150W
Movement range	X/Y Axis	300mm	400mm
	Z Axis	100mm	100mm
	R Axis	±180°	±180°
Moving speed	X/Y Axis	0.1~800mm/sec	0.1~800mm/sec
	Z Axis	0.1~300mm/sec	0.1~300mm/sec
	R Axis	0.1~800°/sec	0.1~800°/sec
Repeatable accuracy	X/Y/R/Z Axis	± 0.01 mm	± 0.01 mm
Maximum payload	Z axis	3kg	3kg
	Platform	8kg	8kg
Operating range		240*300mm	340*400mm
Size (W*D*H)		633x618x852mm	732x723x852mm
Weight		45kg	55kg

ET9384E Dimensions



ET9484E Dimensions



ROBOTIC SOLDERING

ET9584EYA




E Series Soldering Solutions deliver powerful soldering tools and precise process controls.. Featuring a robust 150-watt hot nitrogen ready soldering iron and an industrial-grade power supply, this system provides superior soldering for electronics manufacturers seeking a perfect balance of performance and price. Explore our most popular and best selling soldering robot series: The E Series.



Machine Specifications

Model		PROMATION ET9584EYA
Number of controllable axis		4
Power consumption		600W
Heating controller power consumption		150W
Movement range	X/Y Axis	500mm/400mm
	Z Axis	100mm
	R Axis	±180°
Moving speed	X/Y Axis	0.1~800mm/sec
	Z Axis	0.1~300mm/sec
	R Axis	0.1~800°/sec
Repeatable accuracy	X/Y/R/Z Axis	± 0.01 mm
Maximum payload	Z axis	3kg
	Platform	8kg
Operating range		200mmx400mm (Dual Slide)
Size (W*D*H)		833x723x852mm
Weight		65kg

ET9584EYA Dimensions

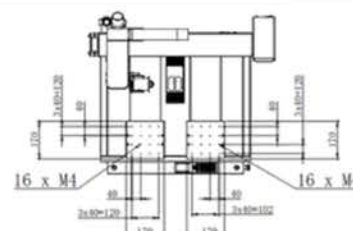

Optional Accessories



Upgraded
Power Supply



Solder Tip
Correction



Fume
Extraction



Nitrogen
Generator



Upgraded
Solder Feeder

ROBOTIC SOLDERING

ET9383E/9483E

E Series Soldering Solutions deliver powerful soldering tools and precise process controls.. Featuring a robust 150-watt hot nitrogen ready soldering iron and an industrial-grade power supply, this system provides superior soldering for electronics manufacturers seeking a perfect balance of performance and price. Explore our most popular and best selling soldering robot series: The E Series.




**E
SERIES**


Machine Specifications

Model		PROMATION ET9383E	PROMATION ET9483E
Number of controllable axis		3	3
Power consumption		500W	500W
Heating controller power consumption		150W	150W
Movement range	X/Y Axis	300mm	400mm
	Z Axis	100mm	100mm
	R Axis	---	---
Moving speed	X/Y Axis	0.1~800mm/sec	0.1~800mm/sec
	Z Axis	0.1~300mm/sec	0.1~300mm/sec
	R Axis	---	---
Repeatable accuracy	X/Y/Z Axis	± 0.01 mm	± 0.01 mm
Maximum payload	Z axis	5kg	5kg
	Platform	8kg	8kg
Operating range		240*300mm	340*400mm
Size (W*D*H)		630x607x730mm	733x710x742mm
Weight		40kg	45kg

ET9383E Dimensions

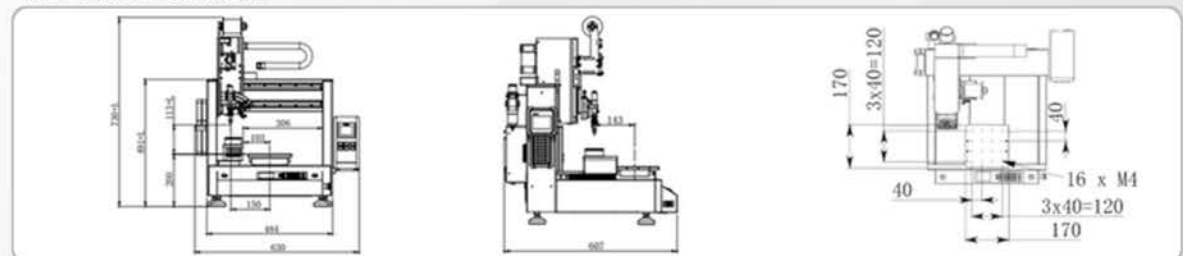

ET9483E Dimensions

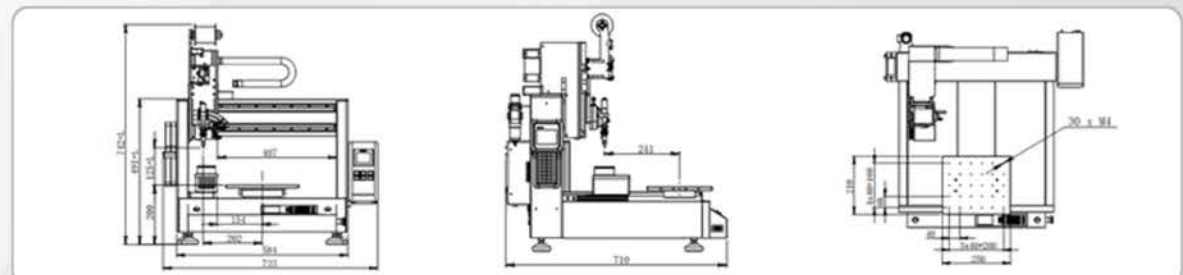

ROBOTIC SOLDERING

ET9583EYA




E Series Soldering Solutions deliver powerful soldering tools and precise process controls.. Featuring a robust 150-watt hot nitrogen ready soldering iron and an industrial-grade power supply, this system provides superior soldering for electronics manufacturers seeking a perfect balance of performance and price. Explore our most popular and best selling soldering robot series: The E Series.



Machine Specifications

Model		PROMATION ET9583EYA
Number of controllable axis		3
Power consumption		500W
Heating controller power consumption		150W
Movement range	X/Y Axis	500mm/400mm
	Z Axis	100mm
	R Axis	---
Moving speed	X/Y Axis	0.1~800mm/sec
	Z Axis	0.1~300mm/sec
	R Axis	---
Repeatable accuracy	X/Y/Z Axis	± 0.01 mm
Maximum payload	Z axis	5kg
	Platform	8kg
Operating range		200mmx400mm (Dual Slide)
Size (W*D*H)		830x707x731mm
Weight		55kg

ET9583EYA Dimensions

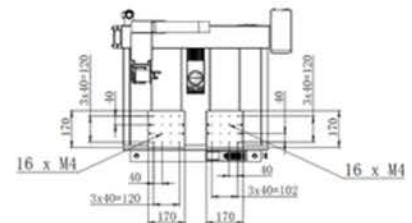

Optional Accessories



Upgraded
Power Supply



Solder Tip
Correction



Fume
Extraction



Nitrogen
Generator



Upgraded
Solder Feeder

ROBOTIC SOLDERING

ET9383C/9483C

ECO Series Soldering Solutions deliver the ideal balance between precision and affordability. Featuring a 150-watt soldering iron paired with an industrial-grade power supply, this system provides reliable, high-performance soldering for cost-conscious electronics manufacturers. Discover unmatched value where platform flexibility meets budget-smart engineering — designed to perform without compromise.




**ECO
SERIES**


Machine Specifications

Model		PROMATION ET9383C	PROMATION ET9483C
Number of controllable axis		3	3
Power consumption		250W	250W
Heating controller power consumption		150W	150W
Movement range	X/Y Axis	300mm	400mm
	Z Axis	100mm	100mm
Moving speed	X/Y Axis	0.1~600mm/sec	0.1~600mm/sec
	Z Axis	0.1~200mm/sec	0.1~200mm/sec
Repeatable accuracy	X/Y/Z Axis	± 0.02 mm	± 0.02 mm
Maximum payload	Z axis	2kg	2kg
	Platform	5kg	5kg
Operating range		240*300mm	340*400mm
Size (W*D*H)		620x605x720mm	720x705x720mm
Weight		40kg	45kg

ET9383C Dimensions

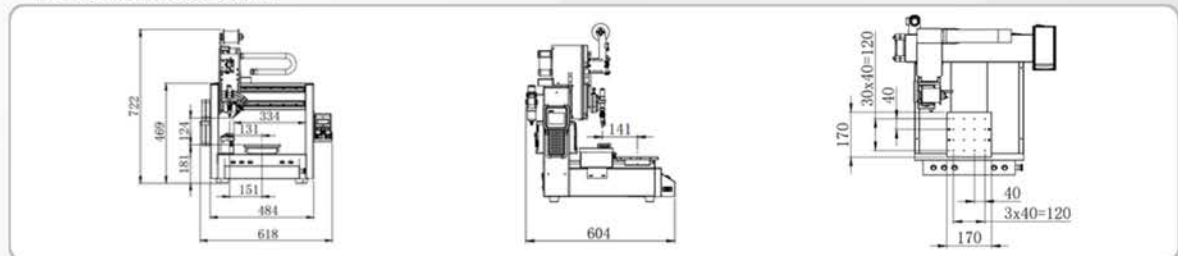

ET9483C Dimensions

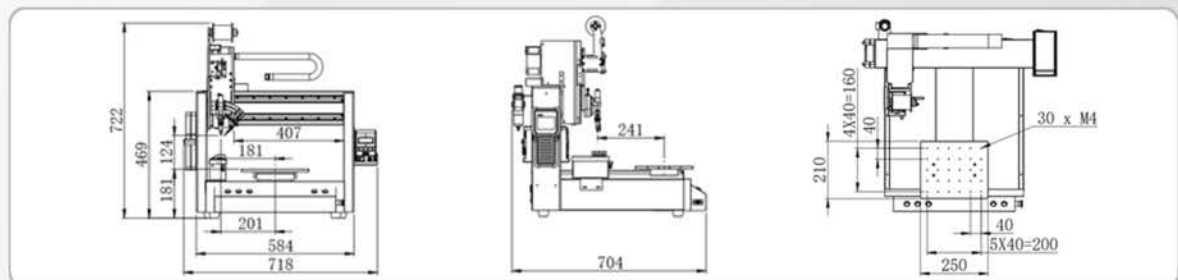

ROBOTIC SOLDERING

ET9384C/9484C


ECO Series Soldering Solutions deliver the ideal balance between precision and affordability. Featuring a 150-watt soldering iron paired with an industrial-grade power supply, this system provides reliable, high-performance soldering for cost-conscious electronics manufacturers. Discover unmatched value where platform flexibility meets budget-smart engineering — designed to perform without compromise.




Machine Specifications

Model		PROMATION ET9384C	PROMATION ET9484C
Number of controllable axis		4	4
Power consumption		280W	280W
Heating controller power consumption		150W	150W
Movement range	X/Y Axis	300mm	400mm
	Z Axis	100mm	100mm
	R Axis	300°	300°
Moving speed	X/Y Axis	0.1~600mm/sec	0.1~600mm/sec
	Z Axis	0.1~200mm/sec	0.1~200mm/sec
	R Axis	0.1~600°/sec	0.1~600°/sec
Repeatable accuracy	X/Y/R/Z Axis	± 0.02 mm	± 0.02 mm
Maximum payload	Z axis	2kg	2kg
	Platform	5kg	5kg
Operating range		240*300mm	340*400mm
Size (W*D*H)		620x605x720mm	720x705x720mm
Weight		40kg	45kg

ET9384C Dimensions

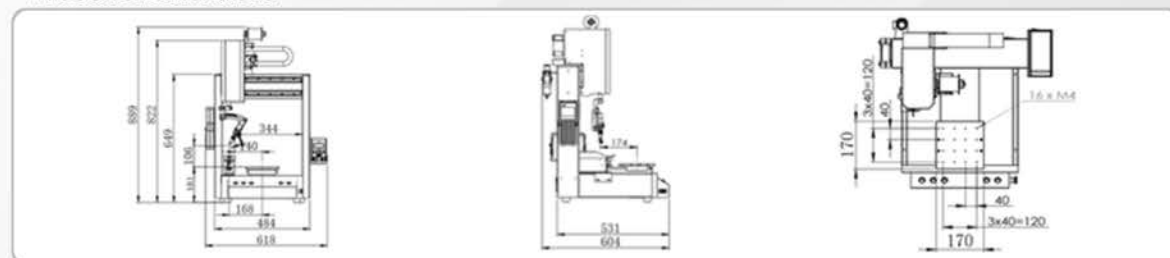

ET9484C Dimensions

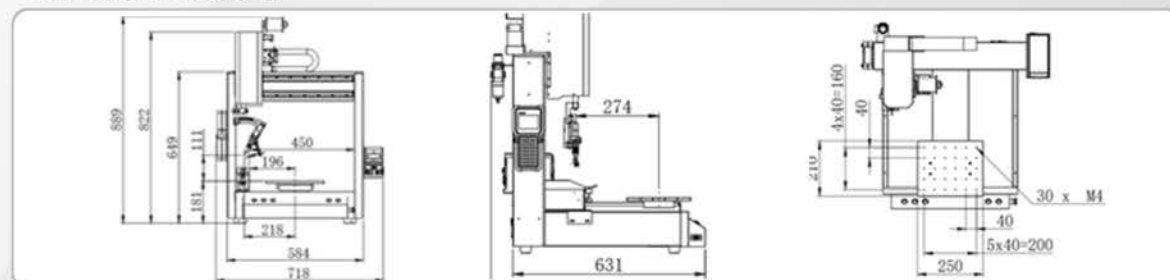

Where Style and Function Perfectly Combine



ESC40AC Safety Enclosures

Operator safety remains a top priority.

PROMATION USA is proud to offer a variety of different work cell solutions to meet customer specific safety requirements. Our team specializes in the ability to customize and tailor robot safety enclosures to meet the increasing demands for operator safety; all while offering an elegant and rich exterior- across a variety of robotic work cells.



Safety Enclosure Model	Working Table-Top Size			Maximum Stroke of Applicable Equipment		Compatible Equipment Models
	Width (W)	Depth (D)	Height (H)	X	Y	
ESC40AB	1000mm	900mm	1800mm	500mm	400mm	ECO SERIES
ESC40AC	900mm	900mm	1800mm	400mm	400mm	E SERIES
				400mm	400mm	F SERIES
				400mm	400mm	E + F SERIES
				300mm	300mm	E+ F SERIES

Cartesian Series. Structured Motion.



Cartesian-style soldering robots deliver unparalleled accuracy through rigid, linear-axis control—ensuring every motion, every angle, and every solder joint is executed with exacting repeatability. Built for applications demanding consistent path fidelity and stable thermal performance, these systems provide a dependable foundation for high-quality robotic soldering across a wide range of assemblies.

Engineered for versatility, Cartesian platforms support complex multi-point programs, precision-controlled solder deposition, and scalable tooling configurations, making them ideal for both dedicated production and high-mix environments. Their straightforward architecture enables simplified maintenance, rapid integration, and exceptional long-term reliability.

Experience the strength of structured motion—redefine accuracy and repeatability in automated soldering.

ROBOTIC SOLDERING

9152N / 9252N

**N
SERIES**


N Series Soldering Solutions deliver precise motion control and increased flexibility for handling a diverse range of applications. Configurable soldering technology and overhead robot gantry designs allow end-users and integrators the ability to custom tailor soldering solutions to their unique project needs.




Machine Specifications

Model		PROMATION 9152N	PROMATION 9252N
Number of controllable axis		2	2
Power consumption		300W	300W
Heating controller power consumption		150W	150W
Movement range	X Axis	100mm	200mm
	Z Axis	100mm	100mm
	R Axis	---	---
Moving speed	X Axis	0.1~300mm/sec	0.1~300mm/sec
	Z Axis	0.1~300mm/sec	0.1~300mm/sec
	R Axis	---	---
Repeatable accuracy	X/Z Axis	± 0.02 mm	± 0.02 mm
Maximum payload	Z axis	3kg	3kg
	Platform	Unlimited	Unlimited
Size (W*D*H)		300x500x540mm	300x600x540mm
Weight		18kg	20kg

9152N Dimensions

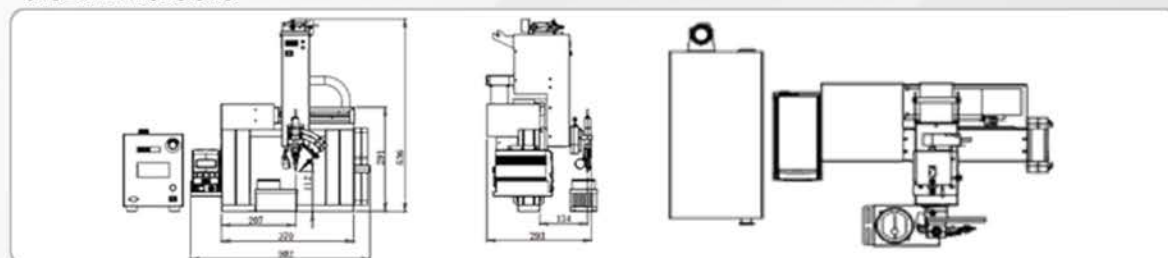

9252N Dimensions

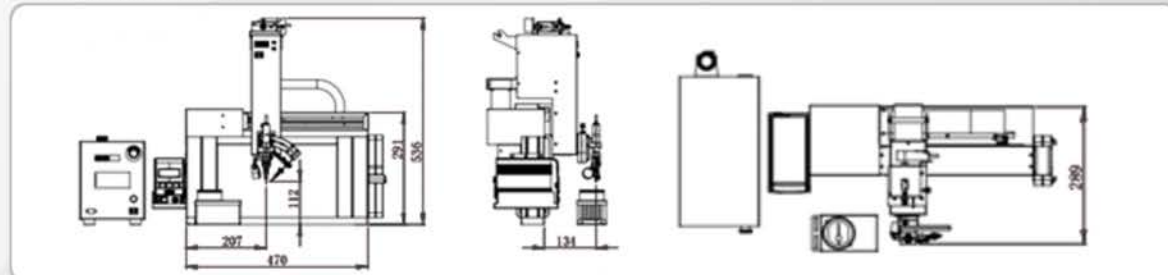

ROBOTIC SOLDERING

9153N(A) / 9253N(A)

N Series Soldering Solutions deliver precise motion control and increased flexibility for handling a diverse range of applications. Configurable soldering technology and overhead robot gantry designs allow end-users and integrators the ability to custom tailor soldering solutions to their unique project needs.





**N
SERIES**



Machine Specifications

Model		9153N	9153NA	9253N	9253NA
Number of controllable axis		3	3	3	3
Power consumption		300W	300W	300W	300W
Heating controller power consumption		150W	150W	150W	150W
Movement range	X/Y Axis	100mm	100/200mm	200mm	200/100mm
	Z Axis	100mm	100mm	100mm	100mm
	R Axis	---	---	---	---
Moving speed	X/Y Axis	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec
	Z Axis	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec
	R Axis	---	---	---	---
Repeatable accuracy	X/Y/Z Axis	± 0.02 mm	± 0.02 mm	± 0.02 mm	± 0.02 mm
Maximum payload	Z axis	3kg	3kg	3kg	3kg
	Platform	Unlimited	Unlimited	Unlimited	Unlimited
Size (W*D*H)		500x370x540mm	500x470x540mm	600x370x540mm	600x370x540mm
Weight		32kg	35kg	36kg	36kg

Machine Dimensions

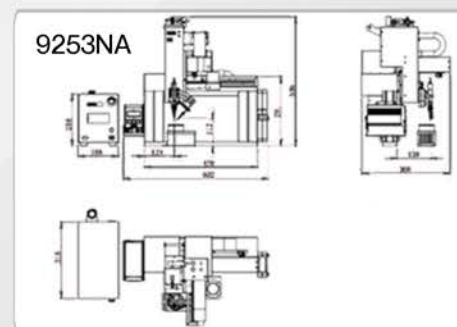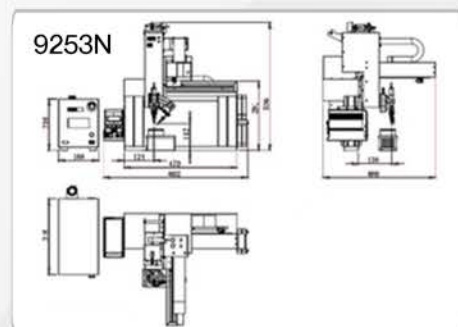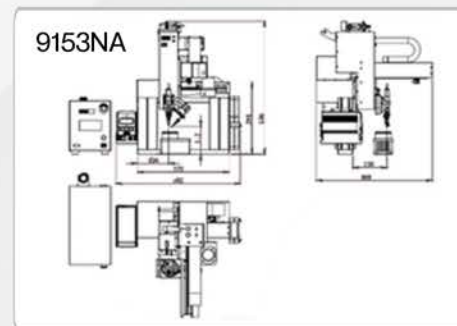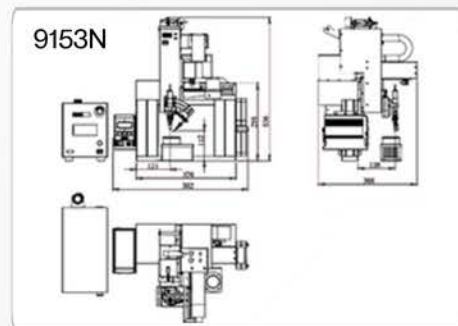

Optional Accessories



Upgraded Power Supply



Nitrogen Generator



Fume Extraction



Solder Tip Correction

ROBOTIC SOLDERING

9353N(A) / 9453NA

**N
SERIES**

N Series Soldering Solutions deliver precise motion control and increased flexibility for handling a diverse range of applications. Configurable soldering technology and overhead robot gantry designs allow end-users and integrators the ability to custom tailor soldering solutions to their unique project needs.




Machine Specifications


Model		9353N	9353NA	9453NA
Number of controllable axis		3	3	3
Power consumption		400W	400W	400W
Heating controller power consumption		150W	150W	150W
Movement range	X/Y Axis	300mm	300/200mm	400/300mm
	Z Axis	100mm	100mm	100mm
	R Axis	---	---	---
Moving speed	X/Y Axis	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec
	Z Axis	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec
	R Axis	---	---	---
Repeatable accuracy	X/Y/Z Axis	± 0.02 mm	± 0.02 mm	± 0.02 mm
Maximum payload	Z axis	3kg	3kg	3kg
	Platform	Unlimited	Unlimited	Unlimited
Size (W*D*H)		650x620x520mm	650x520x520mm	750x620x520mm
Weight		36kg	36kg	40kg

Machine Dimensions


9353N

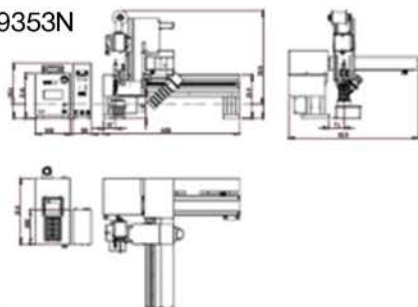

9353NA

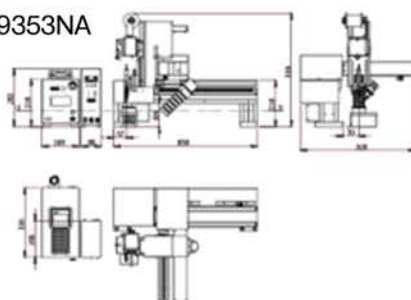

9453NA

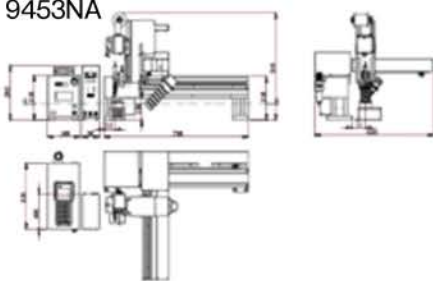

Available Upgrades: Servo Motion Control System



Optional Accessories



Upgraded
Power Supply



Nitrogen
Generator



Fume
Extraction



Solder Tip
Correction

ROBOTIC SOLDERING

9154N(A) / 9254N(A)

N Series Soldering Solutions deliver precise motion control and increased flexibility for handling a diverse range of applications. Configurable soldering technology and overhead robot gantry designs allow end-users and integrators the ability to custom tailor soldering solutions to their unique project needs.





**N
SERIES**



Machine Specifications

Model		9154N	9154NA	9254N	9254NA
Number of controllable axis		4	4	4	4
Power consumption		350W	350W	350W	350W
Heating controller power consumption		150W	150W	150W	150W
Movement range	X/Y Axis	100mm	100/200mm	200mm	200/100mm
	Z Axis	100mm	100mm	100mm	100mm
	R Axis	±180°	±180°	±180°	±180°
Moving speed	X/Y Axis	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec
	Z Axis	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec
	R Axis	0.1~600°/sec	0.1~600°/sec	0.1~600°/sec	0.1~600°/sec
Repeatable accuracy	X/Y/Z Axis	± 0.02 mm	± 0.02 mm	± 0.02 mm	± 0.02 mm
Maximum payload	Z axis	2kg	2kg	2kg	2kg
	Platform	Unlimited	Unlimited	Unlimited	Unlimited
Size (W*D*H)		500x370x720mm	500x470x720mm	600x470x720mm	600x370x720mm
Weight		35kg	37kg	40kg	38kg

Machine Dimensions

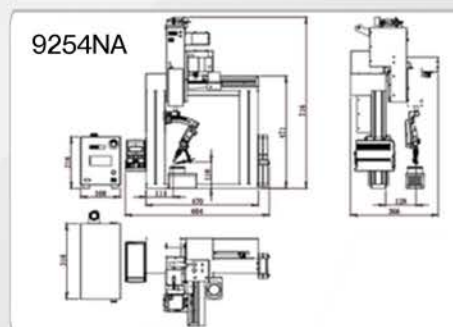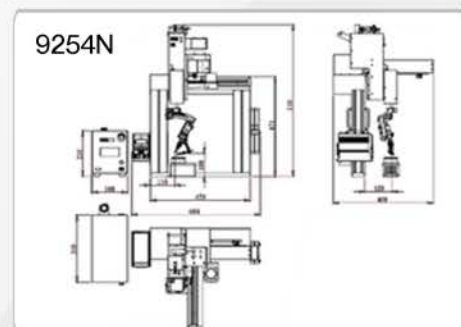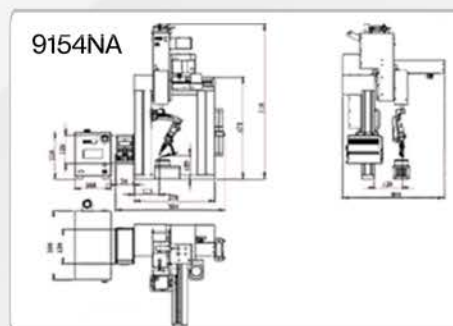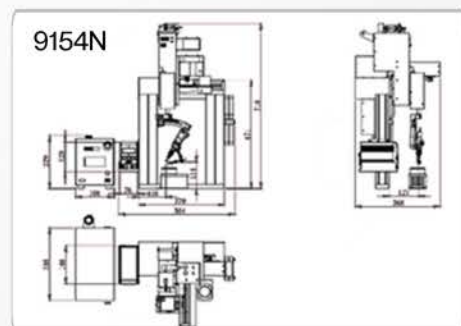

Optional Accessories



Upgraded Power Supply



Nitrogen Generator



Fume Extraction



Solder Tip Correction

ROBOTIC SOLDERING

9354N(A) / 9454NA




N Series Soldering Solutions deliver precise motion control and increased flexibility for handling a diverse range of applications. Configurable soldering technology and overhead robot gantry designs allow end-users and integrators the ability to custom tailor soldering solutions to their unique project needs.



Machine Specifications

Model		9354N	9354NA	9454NA
Number of controllable axis		4	4	4
Power consumption		400W	400W	400W
Heating controller power consumption		150W	150W	150W
Movement range	X/Y Axis	300mm	300/200mm	400/300mm
	Z Axis	100mm	100mm	100mm
	R Axis	300°	300°	300°
Moving speed	X/Y Axis	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec
	Z Axis	0.1~300mm/sec	0.1~300mm/sec	0.1~300mm/sec
	R Axis	0.1~600°/sec	0.1~600°/sec	0.1~600°/sec
Repeatable accuracy	X/Y/Z Axis	± 0.02 mm	± 0.02 mm	± 0.02 mm
Maximum payload	Z axis	2kg	2kg	2kg
	Platform	Unlimited	Unlimited	Unlimited
Size (W*D*H)		650x680x720mm	650x580x720mm	750x680x720mm
Weight		45kg	48kg	50kg

Machine Dimensions

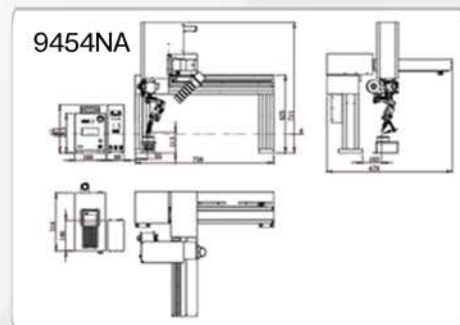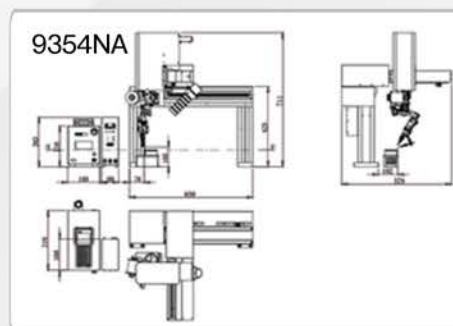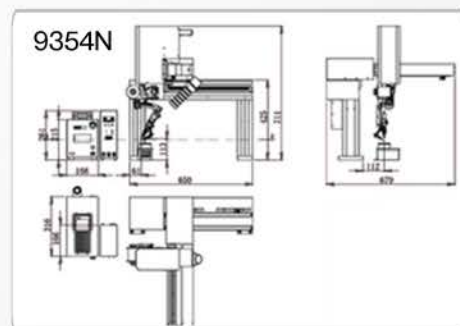

Available Upgrades: Servo Motion Control System



Optional Accessories



Upgraded
Power Supply



Nitrogen
Generator



Fume
Extraction



Solder Tip
Correction

ROBOTIC SOLDERING

9454N


N Series Soldering Solutions deliver precise motion control and increased flexibility for handling a diverse range of applications. Configurable soldering technology and overhead robot gantry designs allow end-users and integrators the ability to custom tailor soldering solutions to their unique project needs.



Machine Specifications

Model		PROMATION 9454N
Number of controllable axis		4
Power consumption		1500W
Heating controller power consumption		150W
Movement range	X/Y Axis	400mm
	Z Axis	100mm
	R Axis	300°
Moving speed	X/Y Axis	0.1~300mm/sec
	Z Axis	0.1~300mm/sec
	R Axis	0.1~600°/sec
Repeatable accuracy	X/Y/R/Z Axis	± 0.02 mm
Maximum payload	Z axis	2kg
	Platform	Unlimited
Size (W*D*H)		950x860x720mm
Weight		108kg

9454N Dimensions

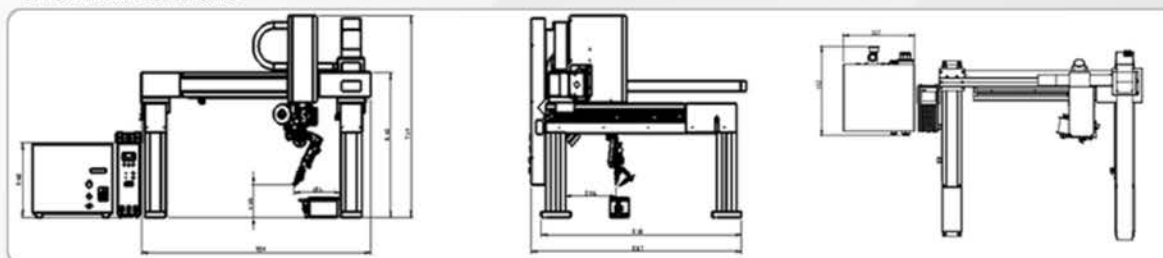

Optional Accessories



Upgraded
Power Supply



Solder Tip
Correction



Fume
Extraction



Nitrogen
Generator



Upgraded
Solder Feeder

Integration Kits.

Modular Technology.



Our Integration Kits deliver a modular, plug-and-perform approach for manufacturers seeking to embed high-precision soldering into their own automated platforms. Designed for OEMs, system integrators, and advanced production environments, each kit provides the core technologies required for reliable robotic soldering—industrial-grade irons, precision feeders, thermal control, and optimized motion capability.

With a commitment to engineering excellence and process stability, PROMATION's integration kits empower innovators to accelerate development cycles, reduce engineering overhead, and bring world-class soldering capability to nearly any automation architecture.

ROBOTIC SOLDERING

Integration Kits

Built for versatility, these integration kits adapt effortlessly to new or existing equipment, enabling custom automation solutions without the complexity of designing a soldering process from the ground up. From collaborative robots to specialized fixtures and proprietary motion systems, our kits ensure consistent joint quality, stable throughput, and repeatable performance across even the most demanding applications.




Most Popular Integrations

Model		Customizable Robot Integration Kit
379EC Power Supply		180W / 0~420°C / LCD Temperature Display
9012T Soldering Iron		N2 Ready / 180W Soldering Iron w/ Real Time Temperature Feedback Loop
9039 N2 Generator		9039 Table-Top Nitrogen Generation Station / 99.9% Purity
Available Cleaning Stations	Air	Non-Contact Compressed Air Cleaning
	Sponge	Dual Rotating Wet Sponge Cleaning Station
	Brass	Dual Rotating Brass Brush Cleaning Station
371T Solder Feeding Station		Ultra-High Precision (Under Head Mount) Solder Feeding Station. Compatible Wire Diameters (mm): 0.3, 0.4, 0.5, 0.6, 0.8, 1.0, 1.2
Total End-Effector Payload		Approx. 7.5lbs
Custom Integration Cable Kit		9M Overall Cable Length (*Can be customized) - Standard Kit includes all necessary connecting harnesses and cables.
Connecting Type		110V / 24V / *Recommend PWM (Pulse Width Modulation) PLC

Optional Solder Wire Preheat Kit


Includes: 262 Power Supply (90W) with max. temperature of 100°C. Preheat thermode, solder wire output needle attachment, and connecting cable(s). 110V Operation

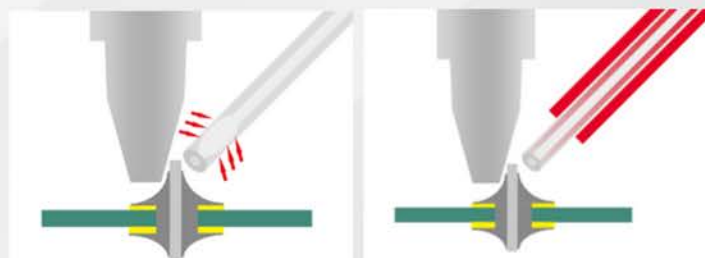

Additional Accessories



Hot Bar Series. Power of Precision.

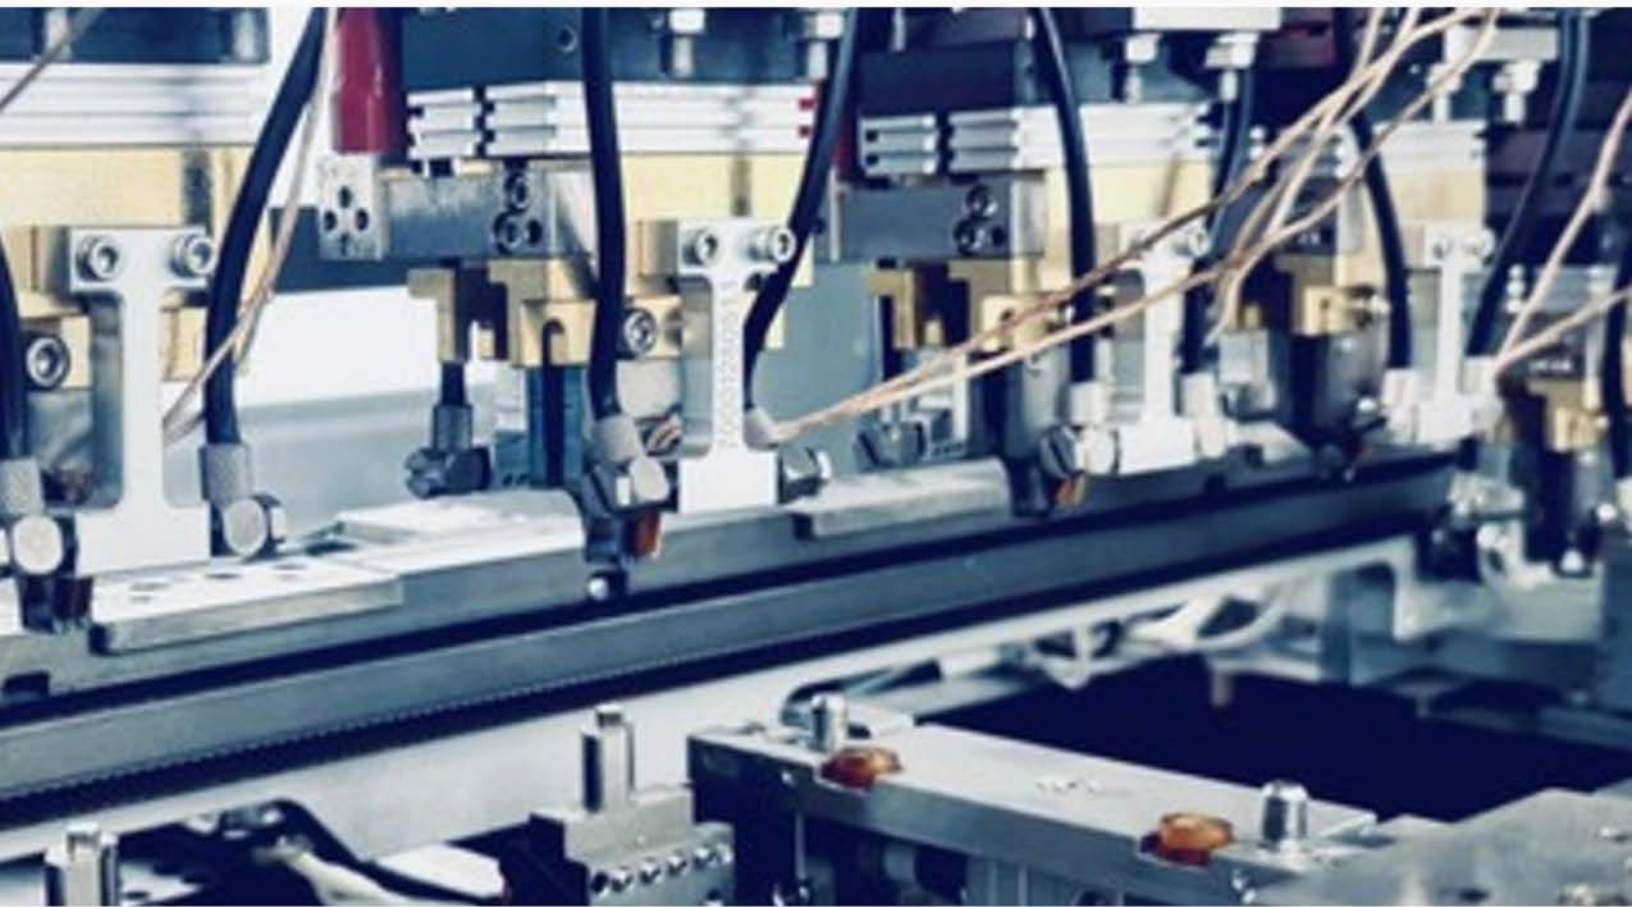

Hot Bar Soldering solutions deliver controlled, uniform thermal energy for applications requiring clean, consistent, and highly reliable solder bonds. Ideal for flex-to-board, wire-to-pad, and fine-pitch component attachment, our systems ensure precise temperature profiles and repeatable pressure control—resulting in strong, void-free connections with minimal stress on delicate assemblies.

Designed for demanding electronics environments, each system integrates advanced thermal monitoring, programmable heating cycles, and stable mechanical alignment to achieve exceptional joint quality across a wide range of materials.

Engineered with performance, reliability, and ease of operation in mind, our Hot Bar Soldering solutions give manufacturers the confidence to tackle intricate bonding challenges with unmatched consistency.

ROBOTIC SOLDERING

ET9H393

Hot Bar Soldering Solutions deliver profiled temperature control and programmable pressure to applications; in order to achieve high quality solder terminations. Easy to use programming controls, state-of-the-art closed loop control with digital temperature calibration delivers more productivity and improved soldering consistency. Our systems deliver smooth and consistent solder each and every time.



**HOT
BAR**



Machine Specifications

Model		PROMATION ET9H393
Number of controllable axis		3
Power consumption		1500W
Heating controller power consumption		200W
Movement range	X/Y Axis	300mm
	Z Axis	100mm
	R Axis	---
Moving speed	X/Y Axis	0.1~600mm/sec
	Z Axis	0.1~300mm/sec
	R Axis	---
Repeatable accuracy	X/Y/R/Z Axis	± 0.02 mm
Maximum payload	Z axis	5kg
	Platform	8kg
Size (W*D*H)		550x590x690mm (without controller)
Weight		65kg

ET9H393 Dimensions



Optional Accessories



Titanium Head
Conversion
Assembly



Independent
Film Rolling Kit

ROBOTIC SOLDERING

ET9H593YA


Hot Bar Soldering Solutions deliver profiled temperature control and programmable pressure to applications; in order to achieve high quality solder terminations. Easy to use programming controls, state-of-the-art closed loop control with digital temperature calibration delivers more productivity and improved soldering consistency. Our systems deliver smooth and consistent solder each and every time.



Machine Specifications

Model		PROMATION ET9H593YA
Number of controllable axis		3
Power consumption		1500W
Heating controller power consumption		250W
Movement range	X/Y Axis	500/400mm
	Z Axis	100mm
	R Axis	---
Moving speed	X/Y Axis	0.1~600mm/sec
	Z Axis	0.1~300mm/sec
	R Axis	---
Repeatable accuracy	X/Y/R/Z Axis	± 0.02 mm
Maximum payload	Z axis	5kg
	Platform	8kg
Size (W*D*H)		700x690x650mm (without controller)
Weight		90kg

ET9H593YA Dimensions

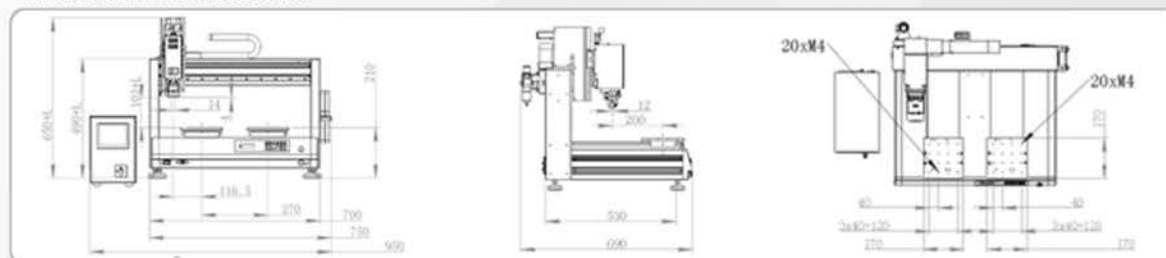

Optional Accessories



Titanium Head
Conversion
Assembly



Independent
Film Rolling Kit

Upgrade Your Production Line with Intelligent Automation

Precision Redefined

Our advanced robotic platforms deliver flawless soldering performance through intelligent motion control, stable thermal profiling, and adaptive process monitoring. Designed for high-mix or high-volume environments, our systems ensure perfect repeatability and unmatched solder quality—every cycle.



Built for Complexity

Engineered for demanding applications, this multi-axis robotic system excels in detailed path control and fine-pitch soldering. Its robust architecture, programmable process logic, and integrated quality safeguards give manufacturers confidence in every operation, from prototype to full-scale production.

Productivity Elevated

A fully automated in-line solution designed to eliminate manual process variation while increasing throughput. Featuring continuous-flow automation, precision solder delivery, and real-time diagnostics, this platform sets the benchmark for efficiency, uptime, and long-term process stability.



PROMATION USA

9900 58th Place
Suite 100
Kenosha, WI 53144 USA

Contact

Phone: 262-764-4832
Website: www.promationusa.com
Social Media: @promationusa

