

Exercise 0

A guided first journey from source code to a running program

Introduction to Computer Science

This exercise is not graded, and you are not expected to know the tools in advance. Its purpose is to let you install everything calmly, try the complete course workflow once, and solve any technical problems before the graded exercises begin. At the end, the submission system will send you an email with a grade of **100**. In this exercise, that number simply means that your setup and submission were successful.

During the exercise, we will move through the same journey that you will follow in later assignments. We will begin with code stored on GitHub, bring a copy to your computer, compile and run it on your local computer and on your Arduino board. Finally, you will connect to the departmental server, compile and run the code there, and submit it. More specifically:

1. You will install Git, VS Code, GCC, and the Arduino command-line tools.
2. You will create your own fork of Exercise 0 and clone it to Windows.
3. You will compile and run C code on your local machine.
4. You will compile and upload a program to an Arduino Uno, and then communicate with it through the serial interface.
5. You will connect to the departmental Linux server and test the program there.
6. You will prepare the required ZIP archive, submit it, and understand the feedback returned by the submission system.

1 Before you begin

Before we start, make sure you have your departmental username and password. You can find your username [here](#), under the entry UNIX-MACS or ESC. Your password is the same password you use to log in to In-Bar.

You will also need a GitHub account. GitHub is the website that we use to distribute the exercise files and keep track of code. If you do not have an account yet, create a free one at github.com. By the way, GitHub offers a Student Developer Pack with various benefits for students. You are welcome to apply for it in your free time (:

We also recommend creating one simple folder for all course work, such as `C:\intro2cs`. Keeping the path short and using English letters prevents several surprisingly common problems with compilers and file-transfer tools. For the same reason, avoid placing the course folder inside OneDrive, Google Drive, or another synchronized folder.

2 Install the Windows tools

2.1 Install Git

Git is a tool for managing the files in a programming project and keeping track of changes made to them over time. It records how the project evolves, allows previous versions to be recovered, and helps keep different changes organized. Git is especially useful when several people work on the same project. Each person can work on their own copy, while Git helps combine their changes and identify cases where two people modified the same part of the code. In this course, we will mainly use Git to download complete exercise projects, work on them on your computer, and keep the project files organized. GitHub is a website that stores Git projects, called repositories. Git is the program installed on your computer that allows you to copy these repositories and work with them locally.

We will first install Git for Windows. You only have to do this once.

1. Open the official [Git for Windows](#) page in your browser.
2. Download the installer that matches your computer. For almost every current Windows computer, the x64 installer is the correct choice.
3. Run the installer. The default choices are suitable for this course, so you may continue with **Next**. If the installer asks how Git should be used from the command line, keep the choice that makes Git available from Command Prompt.
4. When installation finishes, close any Command Prompt windows that were already open. Open a new Command Prompt by opening the Start menu, typing `cmd`, and pressing Enter. Then type the following command and press Enter:

```
git --version
```

The command asks Git to identify itself. You should see a line beginning with `git version`, followed by a version number. The exact number is not important. If Windows says that Git is not recognized, try to open a new Command Prompt window and run the command again. If the problem remains, make sure Git's `cmd` folder is included in the Windows `PATH`. For a standard installation, this is usually: `C:\Program Files\Git\cmd`. To add it, search for **Environment Variables** in the Start menu, open **Edit the system environment variables**, click **Environment Variables**, select **Path**, and add the folder above.

2.2 Install an IDE

An IDE (Integrated Development Environment) is a program that helps you write and develop code. It usually combines a code editor with useful tools such as syntax highlighting, error detection, debugging, and running your program. In this course, the official IDE is Visual Studio Code (VS Code). You may use another IDE, such as [CLion](#), if you prefer. However, the official course IDE is VS Code, so demonstrations, screenshots, and technical support will generally assume that you are using it. Regardless of the editor you choose, all exercises must compile and run using the tools defined by the course. Most importantly: The C compiler used in this course is GCC. Your code must compile correctly using GCC. It is important to distinguish the editor from the compiler: VS Code edits the file, while GCC translates that file into a program the computer can execute.

1. Download VS Code from code.visualstudio.com.
2. During installation, enable **Add to PATH** and the options to open files or folders with Code.
3. Start VS Code. Select the **Extensions** icon on the left, search for **C/C++**, and install the extension whose publisher is Microsoft. This extension teaches VS Code how to understand C source files.

2.3 Install GCC with MSYS2

In this course, we use the GCC compiler. A compiler translates human-readable C code into a machine-language executable that the computer can run. You will learn more about this process later in the course. On Windows, we obtain GCC through MSYS2, which provides a convenient collection of programming tools.

1. Download MSYS2 from msys2.org and install it in the default directory, `C:\msys64`.
2. Open MSYS2 UCRT64 from the Start menu. Be careful to choose UCRT64, not the plain MSYS terminal.
3. Update packages, then install GCC and the archive tool:

```
pacman -Syu
```

If the terminal asks you to close it after the update, reopen MSYS2 UCRT64 and run `pacman -Syu` once more. Then run:

```
pacman -S --needed mingw-w64-ucrt-x86_64-gcc \
mingw-w64-ucrt-x86_64-binutils
```

The command may display a long list of packages. This is normal: a compiler depends on several smaller tools. Press Enter to accept the default selection, then type **Y** when asked whether to continue.

2.4 Add GCC to Windows PATH

We installed GCC, but Windows still needs to know where to find it. We do this by adding the GCC folder to the PATH environment variable. The PATH environment variable is a list of folders in which Windows looks for programs when you type commands such as `gcc`.

1. Open Start and search for **environment variables**.

2. Select Edit the system environment variables, then Environment Variables.
3. Under User variables, select Path and click Edit.
4. Click New and add C:\msys64\ucrt64\bin.
5. Confirm every dialog with OK. Close and reopen VS Code and Command Prompt.

Let us now ask each tool for its version. These commands do not modify anything, they simply confirm that Windows can find the programs:

```
git --version
gcc --version
ar --version
```

Checkpoint

Each command prints a version and none prints “is not recognized.”

2.5 Disable AI assistance

AI tools are becoming an important part of software development, and you will probably use them extensively in the future. During this course, however, we want you to disable them while working on the exercises.

The purpose of an introductory programming course is not only to learn C syntax. More importantly, it is to develop **logical thinking, algorithmic thinking, problem-solving skills, and the ability to debug your own programs.**

AI code generation can be a bit of a **honey pot** at this stage. When you are stuck, it is extremely tempting to let the AI finish a function, fix a bug, or generate an algorithm for you. Unfortunately, the struggle of figuring out these things yourself is exactly where much of the learning happens.

Therefore, please disable VS Code’s AI features while working on the course exercises:

1. Open VS Code’s Settings by selecting File > Preferences > Settings. You can also press **Ctrl+,**.
2. Enter **chat.disableAIFeatures** in the Settings search box.
3. Find Chat: Disable AI Features and enable its checkbox.

This setting disables and hides VS Code’s built-in AI functionality, including AI chat, Copilot, and AI-generated inline suggestions.

You should still keep the **Microsoft C/C++ extension** installed. Its IntelliSense features, such as completing variable and function names and displaying function parameters, are regular programming-editor features and are allowed.

Important

Getting stuck is part of the exercise. Read the error, debug the program, think about the algorithm, ask questions, and try again. These are exactly the skills this course is designed to develop.

3 Fork and clone Exercise 0

The course staff keep the original exercise in a GitHub *repository*. We do not work directly inside that original repository. Instead, you will create a *fork*, which is a GitHub copy associated with your account. You will then *clone* the fork, which downloads a working copy to your computer. This may sound like two copies of the same thing, and that is exactly right: one copy lives on GitHub, while the other is the folder in which you actually edit and run code.

1. Sign in to GitHub and open the course account: github.com/intro2cs-biu.
2. Open the `ex0` repository.

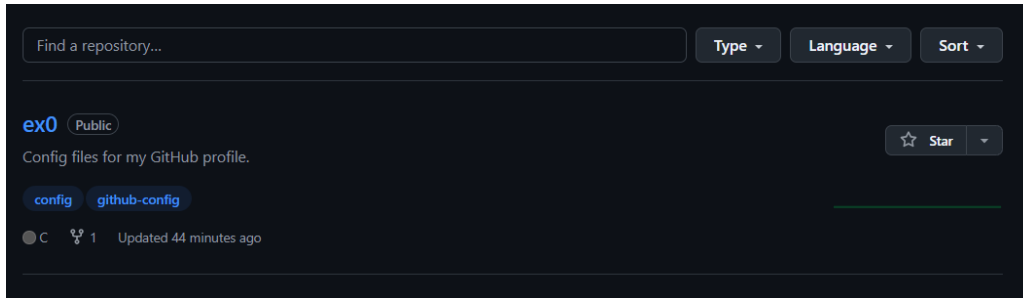


Figure 1: Open the Exercise 0 repository from the course organization. The organization name and GitHub layout may differ slightly from this screenshot.

3. Click Fork, choose your account as owner, and create the fork.

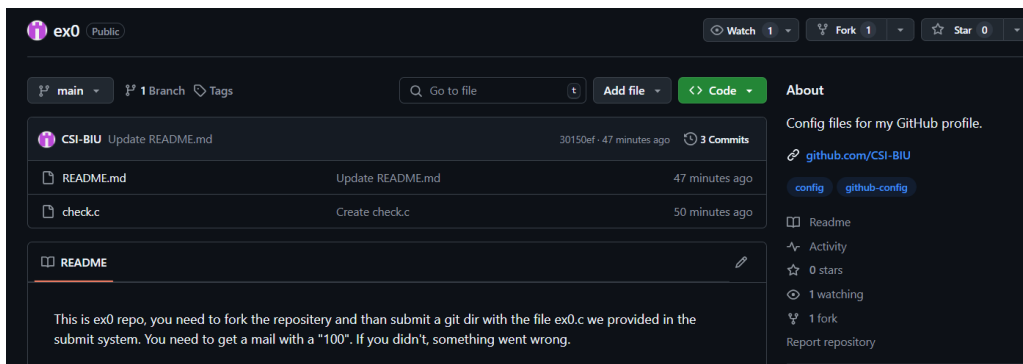


Figure 2: The Fork button is at the upper right of the repository page.

Important

Never publish solutions in a public repository. Your fork must be private if GitHub permits changing its visibility, and solution files must not be shared with other students.

4. In your fork, click the green Code button, choose HTTPS, and copy the URL. It should resemble `https://github.com/YOUR-USER-NAME/ex0.git`.

Now we will create your course folder and download the repository. Open Command Prompt and enter the commands below one line at a time. In the `git clone` line, paste the address that you copied from your own fork:

```
mkdir C:\intro2cs
cd /d C:\intro2cs
git clone https://github.com/YOUR-USER-NAME/ex0.git
cd ex0
dir
```

The `mkdir` command creates a directory, `cd` moves into it, and `git clone` downloads the repository. The final `dir` command lists the files so that you can confirm they arrived. If GitHub asks you to sign in, follow its browser sign-in flow.

Checkpoint

The `dir` command shows `ex0.c`, and `git status` says you are inside a working tree.

4 Compile and run the first C program

You now have your first C source file. A source file is still just text, the computer cannot execute it directly. We will open it in VS Code, ask GCC to compile it, and then run the executable that GCC creates.

Open the cloned folder in VS Code by entering:

```
code .
```

The dot means “the current folder.” When VS Code opens, select `ex0.c`. You will see a short program whose job is to print `hello world`. Return to Command Prompt, make sure you are still in the folder containing `ex0.c`, and compile it with:

```
gcc -std=c99 -Wall -Wextra ex0.c -o ex0.exe
```

Here, `-std=c99` asks GCC to use the version of C required by the course, and `-Wall -Wextra` asks it to warn us about issues in the code. The `-o ex0.exe` part names the program that GCC creates. If the command ends without an error message, compilation succeeded. Now run the new program:

```
ex0.exe
```

The Command Prompt should display:

```
hello world
```

Tip

Compilation and execution are different steps. GCC creates `ex0.exe`; typing `ex0.exe` runs that program. Recompile after every source change.

5 Install the Arduino command-line tools

5.1 Install Arduino CLI

Arduino CLI is the official command-line tool for working with Arduino boards. We will use it to detect connected boards, compile and upload programs, and communicate with the board through the serial monitor.

Download the Windows x64 MSI or ZIP from the official [Arduino CLI installation page](#). For the ZIP version, extract `arduino-cli.exe` to `C:\arduino-cli` and add that directory to your user PATH using the same procedure used for GCC. Open a new Command Prompt and run:

```
arduino-cli version
arduino-cli core update-index
arduino-cli core install arduino:avr
arduino-cli core list
```

The final command should list `arduino:avr`. This also installs Arduino's board support and drivers/tools used for an Uno.

5.2 Install the raw AVR compiler and uploader

The processor inside an Arduino Uno is different from the processor inside your computer. Consequently, the normal Windows GCC cannot create a program for the Uno. We use `avr-gcc`, a version of GCC that targets AVR microcontrollers. The program `avrdude` then transfers the compiled result to the board.

Open MSYS2 UCRT64 and run:

```
pacman -S --needed mingw-w64-ucrt-x86_64-avr-gcc \
  mingw-w64-ucrt-x86_64-avrdude
```

Then open a new Command Prompt and verify:

```
avr-gcc --version
avr-objcopy --version
avrdude --version
```

6 Download and install the Intro2CS library

The Arduino tools know how to compile a program for the Uno, but they do not yet provide the functions used to control the components in the course kit. The Intro2CS library adds these functions.

The library has an [official course tutorial and documentation](#). It contains the current library download, wiring diagrams, compilation commands, and documentation for each library module.

Use the guide to install the library as follows:

1. Download `intro2cs-lib-windows.zip` library from this [link](#).
2. Move the downloaded ZIP file into your main course folder, `C:\intro2cs`. This is the folder that already contains the cloned `ex0` repository.
3. Right-click the ZIP and select **Extract All**. The extracted folder named `intro2cs-lib` should be beside the `ex0` folder, not inside it.

Your main course folder should now look like this:

```
C:\intro2cs\
|-- intro2cs-lib\
|   |-- headers\
|   |-- intro2cs-arduino-lib.a
|   '-- intro2cs-arduino-simulator-lib.a
|-- ex0\
|   |-- ex0.c
|   '-- ex0-arduino.c
|-- ex1\
|-- ...
```

The `ex1` line illustrates where later repositories will go, it does not need to exist yet. If you see another `intro2cs-lib` folder inside the first one, move the inner folder up one level.

In future exercises, clone each repository into `C:\intro2cs`. The relative path `..\intro2cs-lib` will then continue to work without installing the library again.

7 Connect the Arduino circuit

We are now ready to run our first piece of code on the Arduino board. Make sure the usb cable is disconnected from the board before adding or moving wires. This protects the board from an accidental short circuit while you work. Build the circuit shown below using the Arduino Uno, breadboard, LED with its series resistor, and the 16-by-2 LCD. Take your time and follow one wire at a time. Before reconnecting USB, check the LED polarity and verify each power and ground connection.

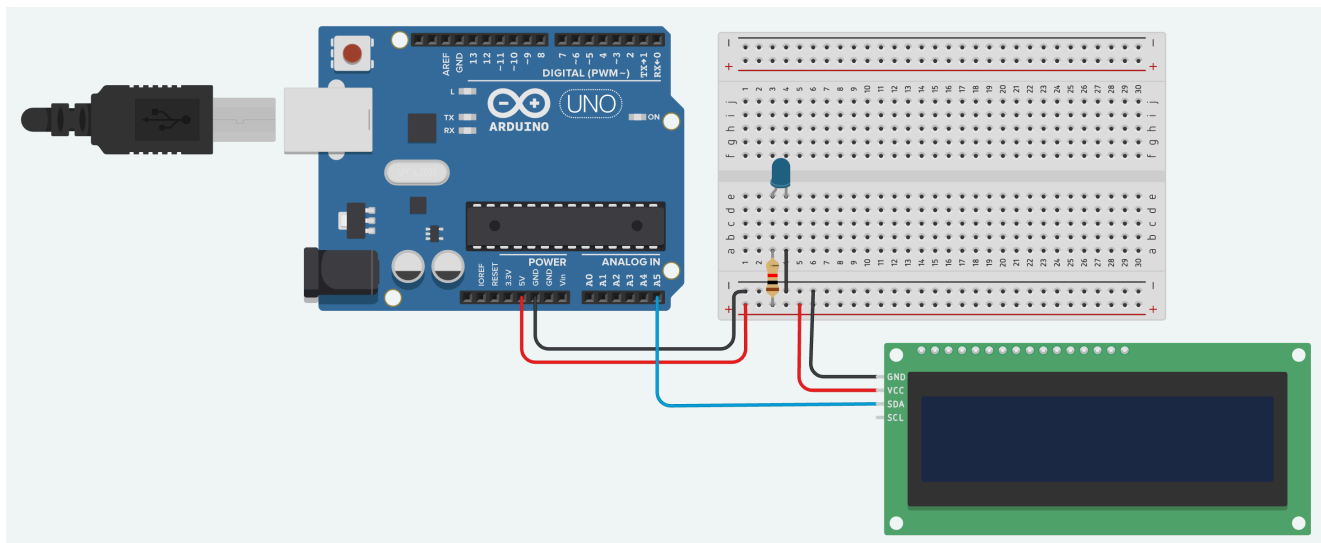


Figure 3: Exercise 0 circuit. Follow the diagram exactly.

Before compiling, open `ex0-arduino.c` in VS Code and take a moment to read through it. You are not expected to understand every detail yet, we will study these ideas more carefully during the course. For now, let us briefly see what each line asks the Arduino to do:

```
#include "arduino.h"
#include "lcd.h"
```

```
#include "serial.h"
#include <stdio.h>

int main(void) {
    pinMode(2, OUTPUT);
    lcdBegin(16, 2);
    serialBegin(9600);
    printf("Hello, World!\n");
    lcdPrintf("Hello, World!");
    digitalWrite(2, HIGH);
}
```

The `#include` lines make functions from the course library and the standard C library available to the program. The function `main` is where the program begins running. Inside it, `pinMode(2, OUTPUT)` prepares pin 2 to send an electrical signal, and `lcdBegin(16, 2)` prepares the LCD, which has 16 characters in each of its two rows.

The call `serialBegin(9600)` starts communication with the computer at a speed of 9600 baud. It also waits briefly so that the serial monitor has time to reconnect after the Arduino resets; this helps prevent the beginning of the first message from being lost or joined to output from an earlier run. The following `printf` sends `Hello, World!` to the computer through that serial connection, while `lcdPrintf` displays the same message on the LCD. Finally, `digitalWrite(2, HIGH)` sends a `HIGH` signal through pin 2, which turns on the connected LED.

This quick explanation is enough for now. You will learn what functions, headers, pins, serial communication, and the values `HIGH` and `OUTPUT` mean in much greater detail as the course progresses.

8 Compile and upload to the Arduino Uno

Compiling for the Arduino has two visible stages. First, `avr-gcc` produces an ELF file containing the machine code and useful metadata. Then `avr-objcopy` creates the smaller HEX file that will be uploaded to the board. Run the following commands:

```
avr-gcc -mmcu=atmega328p -DF_CPU=16000000UL -Os -std=c99 \
-I..\intro2cs-lib\headers ex0-arduino.c \
..\\intro2cs-lib\\intro2cs-arduino-lib.a -o ex0-arduino.elf

avr-objcopy -O ihex -R .eeprom \
ex0-arduino.elf ex0-arduino.hex
```

If your files are stored in different folders, update the paths in the commands accordingly. In future exercises, you will also need to replace the exercise file names (`ex0-arduino.c`, `ex0-arduino.elf`, and `ex0-arduino.hex`) with the appropriate names for that exercise.

Now connect the Arduino board to your computer using the USB cable. Windows assigns the connected board a serial-port name such as `COM3`. The number can change when you use a different USB socket, so we should ask Arduino CLI instead of guessing. Run the following command:

```
arduino-cli board list
```

Look for `Arduino Uno`, FQBN `arduino:avr:uno`, and a port such as `COM3`. The FQBN is Arduino's precise name for the type of board. To upload the code to the board, replace `COM3` in the following

command with the port shown on your computer:

```
avrdude -p atmega328p -c arduino -P COM3 -b 115200 -D \
-U flash:w:ex0-arduino.hex:i
```

Checkpoint

If everything worked correctly, the LCD should display **Hello, World!**, and the LED should be lit.

9 Serial interface tutorial

So far, we have used the computer only to upload a program to the Arduino. Serial communication creates an ongoing connection between the computer and the board, allowing them to exchange information while the program is running. The Arduino board can send text and values to the computer, and the computer can send input back to the Arduino. This makes it especially useful for observing, interacting with, and debugging a running program.

The communication travels through the USB cable. Both sides must agree on a speed, called the *baud rate*, in this exercise that speed is 9600. The starter program contains the following essential pattern:

```
#include "serial.h"
#include <stdio.h>

int main(void) {
    serialBegin(9600);
    printf("Hello, World!\n");
}
```

The header makes the course serial function available. Calling `serialBegin(9600)` connects the familiar standard C input and output functions to the Arduino serial port. Always call it once before using `printf`, `getchar`, or `scanf`. Ending output with `\n` starts a new line, which makes the terminal readable.

9.1 Open the serial monitor

A serial monitor is a small terminal window connected to the board. First ask Arduino CLI for the current port, then open that port at 9600 baud:

```
arduino-cli board list
arduino-cli monitor -p COM3 --config baudrate=9600
```

Remember to replace `COM3` with your port. You should see **Hello, World!**. Press `Ctrl+C` when you want to close the monitor. If Arduino CLI reports a configuration error, ask it to describe the settings supported by this port:

```
arduino-cli monitor -p COM3 --describe
```

Press the Uno's reset button after opening the monitor if the startup message has already passed. Opening a serial connection can itself reset many Uno boards, so a repeated startup message is normal.

Important

COM3 is only an example. Close any serial monitor before re-uploading your code, only one program can normally use the port at a time.

10 Test on the departmental server

The departmental server is a Linux computer maintained by the department. Running your program there confirms that it behaves correctly in the same environment used by the course systems and staff.

Before your first connection, you must set up two-factor authentication:

1. Download and install **Google Authenticator** on your phone ([iPhone](#), [Android](#)).
2. Go to mfar.esc.biu.ac.il and enter your username.
3. After confirming your username, a QR code will be sent to your Bar-Ilan email address. Open Google Authenticator and scan this QR code.
4. Google Authenticator will now display a six-digit verification code that changes every 30 seconds. You will use this code when connecting to the departmental server.

Install [MobaXterm](#), start a new SSH session, and use:

Remote host	<code>planet.cs.biu.ac.il</code> , port 22
Username	your departmental username
SSH gateway	<code>vpn.esc.biu.ac.il</code> , port 2222
Gateway user	the same departmental username

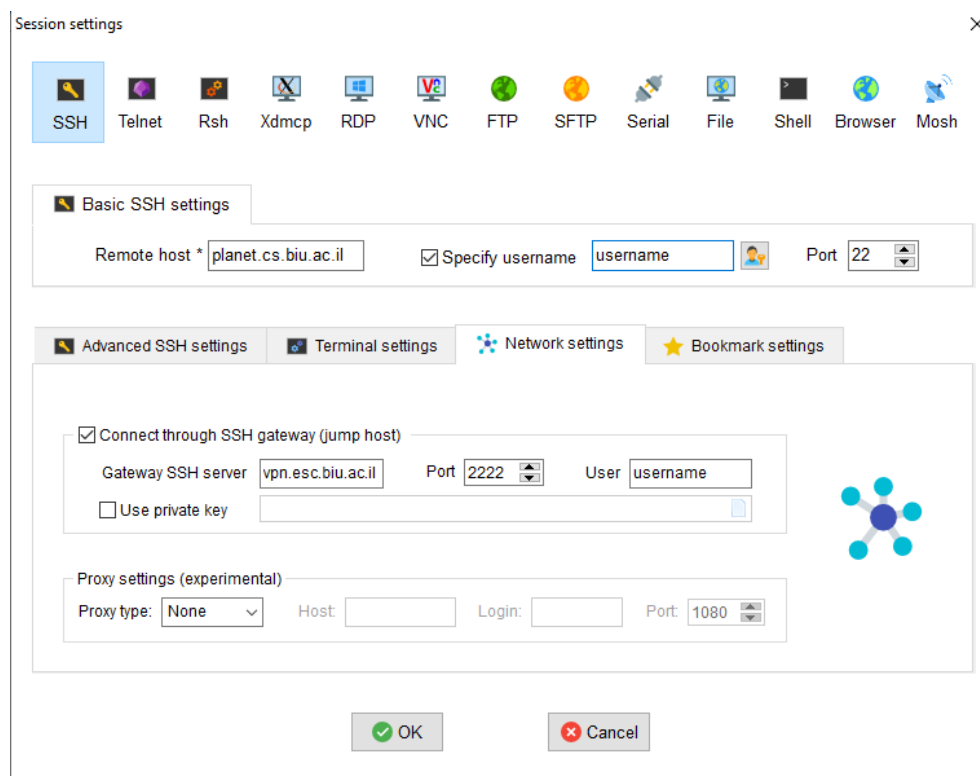


Figure 4: MobaXterm SSH and jump-host settings.

You may be asked for the password, the changing six-digit code, and then the password once more.

After connecting successfully, copy `ex0.c` to the server (you can drag the file into MobaXterm's SFTP pane).

Important

MobaXterm may fail to upload files whose folder path contains Hebrew characters. Avoid using Hebrew characters in file or folder names for anything you plan to upload to the departmental server or submit through the course submission system.

The following commands create a personal exercise folder (`mkdir`), enter it (`cd`), show where you are (`pwd`), list the files (`ls`), compile the program (`g++`), and finally run it (`./ex0`). Enter them one line at a time:

```
mkdir -p ~/intro2cs/ex0
cd ~/intro2cs/ex0
pwd
ls
g++ -std=c99 -Wall -Wextra ex0.c -o ex0
./ex0
```

Expected output is `hello world`.

10.1 Verify the Arduino compilation on the server

You can also use the departmental server to check that your Arduino source code compiles correctly. This is useful because it tests the build in a standard course environment before you upload the result to the physical board.

First, use MobaXterm's SFTP pane to copy `ex0-arduino.c` to your server exercise folder. Copy the `intro2cs-lib` folder to `~/intro2cs` as well, if it is not already there. This creates the same layout used on your Windows computer: `ex0` and `intro2cs-lib` are neighboring folders.

In the remote server terminal, enter:

```
cd ~/intro2cs/ex0
avr-gcc --version
avr-gcc -mmcu=atmega328p -DF_CPU=16000000UL -Os -std=c99 \
  -I../intro2cs-lib/headers ex0-arduino.c \
  ../intro2cs-lib/intro2cs-arduino-lib.a -o ex0-arduino.elf
avr-objcopy -O ihex -R .eeprom \
  ex0-arduino.elf ex0-arduino.hex
```

If these commands finish without an error, the Arduino program compiled successfully. The file that must be uploaded to the board is `ex0-arduino.hex`. In MobaXterm's SFTP pane, find that file in the remote `intro2cs/ex0` folder and drag it back into the local Windows `C:\intro2cs\ex0` folder.

The Arduino is connected by USB to your Windows computer, not to the remote departmental server. For that reason, the remote server normally cannot upload directly to the board through MobaXterm. After downloading the HEX file, close the serial monitor and upload it from a local Command Prompt, replacing `COM3` with the port shown on your computer:

```
arduino-cli board list
avrdude -p atmega328p -c arduino -P COM3 -b 115200 -D \
  -U flash:w:ex0-arduino.hex:i
```

10.2 Getting More Comfortable with Linux

If you would like to become more comfortable with the Linux environment and the commands used above, we recommend working through [this introductory Linux tutorial](#). You do not need to complete the entire tutorial for Exercise 0, but its sections about navigating directories, listing files, and working with the command line are useful throughout the course.

10.3 Optional local Linux workspace with WSL

Windows Subsystem for Linux, usually called WSL, allows you to run a Linux environment directly on your Windows computer. It is useful when you want to practice Linux commands, compile a program in a Linux environment, or work without first connecting to the departmental server.

Installing WSL is recommended but optional. Follow Microsoft's official [WSL installation guide](#), then open the installed Linux distribution from the Windows Start menu. You can use familiar commands such as `pwd`, `ls`, `cd`, and `gcc` inside its terminal.

Important

WSL is a convenient local practice environment, but it is not the departmental server. Even if your program works in WSL, you should still perform the server test required by the exercise.

11 Compare your output with the submission simulator

When you submit an exercise, the submission system runs basic automatic tests. These tests do not connect your program to a physical Arduino. Instead, they use the course simulator library, which replaces hardware actions with text. For example, an instruction that sets a pin to HIGH produces a line of text describing that action. The tests compare the program's output with the output expected for the exercise.

This is the reason you may want to run the simulator on your own computer and on the departmental server: it allows you to see exactly what the basic automatic tests will see. It is not a replacement for using the Arduino board. We use it only to compare textual output before submitting.

Compile the same `ex0-arduino.c` source file with the normal Windows `gcc` compiler, but link it with `intro2cs-arduino-simulator-lib.a` instead of `intro2cs-arduino-lib.a`. The simulator library implements the same course functions while printing their effects in the terminal.

Open Command Prompt in `C:\intro2cs\ex0` or in the departmental server and enter:

```
gcc -std=c99 -Wall -Wextra -I..\intro2cs-lib\headers \  
    ex0-arduino.c \  
    ..\intro2cs-lib\intro2cs-arduino-simulator-lib.a \  
    -o ex0-simulator.exe  
  
ex0-simulator.exe
```

Compare this with the physical-Arduino compile command used earlier. The physical build uses `avr-gcc` and `intro2cs-arduino-lib.a`, the simulated build uses the ordinary `gcc` and `intro2cs-arduino-simulator-lib.a`. Your C source and header includes remain unchanged.

For the starter program, the simulator stays silent while pin 2, the LCD, and serial communication are initialized. Its output begins only when the program performs a visible output operation: it prints `Hello, World!`, renders the LCD update, and indicates that pin 2 was set to HIGH. Compare the order, spelling, capitalization, spaces, and numeric values carefully. Automated comparisons are exact, so output that looks equivalent to a person may still differ because of one extra character or a missing newline.

Important

Passing this comparison only shows that the program produced the expected basic simulator output. You must still compile and run the program on the real Arduino.

12 Prepare the ZIP submission

1. Open the cloned `ex0` folder in File Explorer.
2. Select the required repository contents, including `ex0-arduino.c` and `ex0.c`. Do not include generated `.exe`, `.elf`, `.hex`, `.o`, or simulator archive files unless the submission instructions explicitly

request them.

3. Right-click the selection and choose Compress to ZIP file (or Send to > Compressed folder).

13 Submit and verify the result

You have now reached the final step. Open submit.cs.biu.ac.il. Sign in with your departmental username, password, and verification code. Choose course **89-110**, group **01**, and Exercise **0**, choose the ZIP, send it, and confirm.

The screenshot shows a web form for submitting a ZIP file. It is divided into three main sections:

- (1) בחרי תרגיל (Select exercise):** Contains three dropdown menus. The first is labeled 'קורס:' (Course) with the value '89-110'. The second is labeled 'קבוצה:' (Group) with the value '01'. The third is labeled 'תרגיל:' (Exercise) with the value 'ex_0'.
- (2) שלחי קבצים (Upload ZIP file):** Contains a text input field for the ZIP file name, a 'בחר' (Choose) button, and two buttons labeled 'מחק' (Delete) and 'שלח' (Send). Below the input field is a label 'קבצים שהתקבלו:' (Received files:).
- (3) אשרי ההגשה (Confirm submission):** Contains a red error message 'ללא אישור, התרגיל לא נחשב כהוגש' (Without confirmation, the exercise is not considered submitted) and three buttons: 'חזרה' (Return), 'ביטול' (Cancel), and 'אישור' (Submit).

Figure 5: Select the course, group, exercise, and ZIP before confirming.

After submission, the system examines the archive and sends feedback, normally to your university email address. A successful report ends with a grade of 100.

Checkpoint

Do not consider Exercise 0 complete until the feedback email shows **100**. If the grade is lower, read the report, correct the named issue, rebuild the ZIP, and submit again.

14 If something does not work

Technical setup problems are normal, especially the first time several tools must work together. An error message is information, not a sign that you are bad at programming. Read the first relevant error line, find the matching case below, and check one possible cause at a time.

gcc or git is not recognized

Reopen Command Prompt after editing PATH. Confirm that `C:\msys64\ucrt64\bin` appears in your user PATH.

Header file such as `arduino.h` is missing

Run the command from `ex0` and verify that `..\intro2cs-lib\headers` exists. Do not change include

```

The following files have been accepted for assignment "ex0":

.git/config (292 bytes)
.git/description (73 bytes)
.git/HEAD (21 bytes)
.git/hooks/applypatch-msg.sample (478 bytes)
.git/hooks/commit-msg.sample (896 bytes)
.git/hooks/fsmonitor-watchman.sample (4726 bytes)
.git/hooks/post-update.sample (189 bytes)
.git/hooks/pre-applypatch.sample (424 bytes)
.git/hooks/pre-commit.sample (1643 bytes)
.git/hooks/pre-merge-commit.sample (416 bytes)
.git/hooks/pre-push.sample (1374 bytes)
.git/hooks/pre-rebase.sample (4898 bytes)
.git/hooks/pre-receive.sample (544 bytes)
.git/hooks/prepare-commit-msg.sample (1492 bytes)
.git/hooks/push-to-checkout.sample (2783 bytes)
.git/hooks/update.sample (3650 bytes)
.git/index (209 bytes)
.git/info/exclude (240 bytes)
.git/logs/HEAD (179 bytes)
.git/logs/refs/heads/main (179 bytes)
.git/logs/refs/remotes/origin/HEAD (179 bytes)
.git/objects/pack/pack-e552c6258960418a1ff61dc95326756f0aa137ef.idx (1324 bytes)
.git/objects/pack/pack-e552c6258960418a1ff61dc95326756f0aa137ef.pack (3084 bytes)
.git/packed-refs (112 bytes)
.git/refs/heads/main (41 bytes)
.git/refs/remotes/origin/HEAD (30 bytes)
ex0.c (78 bytes)
README.md (207 bytes)

Your grade for assignment "ex0" is "100".

"ex0" was checked with 1 inputs:

(1) 0 line errors, 100 points out of 100.
Input
Correct Output
hello world
Your Output
hello world

Submitted: Mon, 28 Oct 2024, 1:05.
Last submission date with no reduction points: 28 Oct 2024.

```

Figure 6: Example of successful Exercise 0 feedback.

lines to absolute paths.

No board appears

Try another data-capable USB cable or port, reconnect the board, and rerun `arduino-cli board list`. Check Windows Device Manager for driver errors.

Upload cannot open COM port

Close the serial monitor and any Arduino IDE window, confirm the port again, and retry. Replace the example COM number everywhere.

No serial text

Set the monitor to 9600 baud, open it, and press Reset. Confirm that the code calls `serialBegin(9600)` before printing.

Support resources: [faculty support](#), [submission troubleshooting](#), and [helpdesk](#). Consult classmates and the course forum before opening a helpdesk request.

15 Before you finish

Take one final minute to review what you accomplished. Every statement below should now be true. If one is not, return to that section before moving on to a graded exercise.

- ☐ I can open Git, GCC, and VS Code on my Windows computer.
- ☐ I created both a GitHub fork and a local clone of Exercise 0, and I made sure that I am not publishing solutions publicly.

- ☐ I compiled `ex0.c` locally and saw it print `hello world`.
- ☐ I ran the program on the real Arduino and saw its text in the serial monitor.
- ☐ I compared the program's textual output with the output produced by the submission simulator.
- ☐ I compiled and ran `ex0.c` on `planet.cs.biu.ac.il`.
- ☐ I opened the ZIP and confirmed that `ex0.c` and `ex0-arduino.c` are both at its top level.
- ☐ I received a submission feedback email showing **100**.