



ARTHUR Diesel Engine

TECNOLOGY BY ISUZU



PT. BERJAYA MAKMUR INDONESIA

Komplek DDN, Jl Danau Cibubur Asri II, Kav.23. Harjamukti,
Kec. Cimanggis, Kota Depok, Jawa Barat, 16454

Email : berjayamakmur99@gmail.com


Website : www.berjaya-makmur-indonesia.co.id

4JB1 General Specification





4JB1 Engine Data & Parameter	
Model	4JB1T
Air Induction System	Turbo / Euro II
Application	Pickup, Light Truck, SUV, Commercial Vehicle, etc.
Specification	
Maker & Model	4JB1T
Opeation Layout	4-Cycle Water Cooled, Direct Injecton System
Number of Cylinder- Bore Stroke	4-93mm x 102mm
Displacement	2771cc
Compression Ratio	17.5
Fuel Supply	Direct Injection
Net Weight	230 KG
Size (L*W*H)	742 x 634 x 718
Firing Order	1-3-4-2
Rotation (on the view of Flywheel)	Counter-Clockwise
Fuel System	
Injection Pump	VE Type
Covernor Type	RSV (All Speed Control)
Fuel Filter Type	Paper element, "P" Type
Supplier	Bosch Company
Lubrication System	
Lubrication Type	Forced-Feed Lubricating System
Oil Pump	Gear Type, Korea Pump
C/Oil Filter Type:	Full flow, Paper Element
Oil Capacity	4.5 Liter
Cooling System	
Cooling Type	Liquid Cooling
Water Pump	Impeller Type
Coolant Capacity	10 Liter
Output Power	2.8 kW (12V)
Type	Engaged Magnet Type
Maker & Model	Htachi JV
Water-Resisting Qualities	International Standard
Dust-Resisting Qualities	International Standard
Engine Stop	Fuel Cut-off By Stop Motor
Starter	12V, 80A, IC adjuster inside, with vaccum pump, run signal interface
Turbo Setting	Deflation Valve
Supplier	Honey Well Shanghai
Crankcase Ventilte System	PVC Valve system inside cover of cylinder head, exhaust gas into the intake system through ventilate hipeline.
Performance	
Rated Output Power	66 kW(90 HP)/3000 RPM
Max Torque	>= 200 N.m(20.4 kgm)/2100 RPM
Idle Speed	750 RPM
Max Racing	4200 RPM
Fuel Consumption	230 g/kwh
Cold-Start	-25°C
Temperature of Exhaust Gas	< 600°C
Noise	Max 106dB With JIS a Characteristics



EVERY TIME.

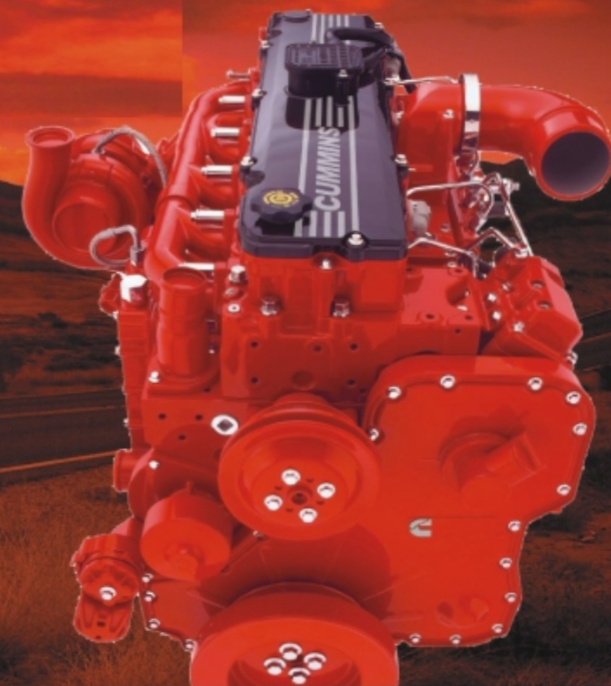

Cummins Industrial Engine

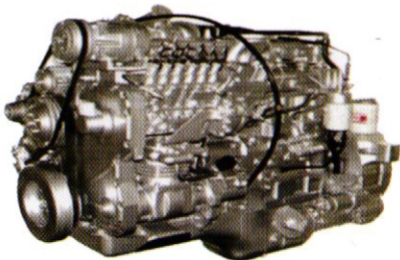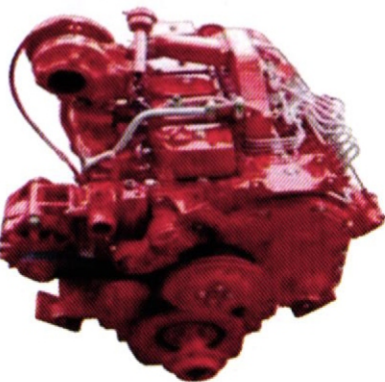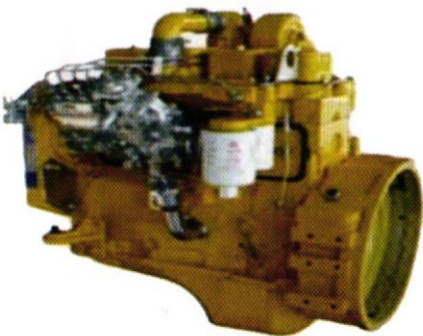

4B Series

- **High fuel efficiency** 20% fewer oil consumption than Other competitive products.
- **The turbo charger with wastegated design** optimizes operation across the torque curve resulting in excellent low-end torque.
- **Compacted yet durable and dependable engine** B series engine contains up to 40% fewer parts than competitive engines in its class. this result in a better power to weight ration, a less chance of failure and lower repair cost.
- **Advanced design and manufacturing** make the engine delivers superior performance and lower cost than competitive engines.
- **Excellent cold start performance** optional assistant cold starter with improved 6kw starter and intake air heater
- **Excellent performance and advantage** adopt advanced design to achieve higher horse power and lower weight horsepower per liter reached 24,9 Kw/l

6B Series

- **High fuel efficiency** 20% fewer oil consumption than Other competitive products.
- **The turbo charger with wastegated design** optimizes operation across the torque curve resulting in excellent low-end torque.
- **Compacted yet durable and dependable engine** B series engine contains up to 40% fewer parts than competitive engines in its class. this result in a better power to weight ration, a less chance of failure and lower repair cost.
- **Advanced design and manufacturing** make the engine delivers superior performance and lower cost than competitive engines.
- **Excellent cold start performance** optional assistant cold starter with improved 6,6kw starter and intake air heater
- **Excellent performance and advantage** adopt advanced design to achieve higher horse power and lower weight horsepower per liter reached 22,4 Kw/l

C Series

- **High fuel efficiency** 20% fewer oil consumption than Other competitive products.
- **The turbo charger with wastegated design** optimizes operation across the torque curve resulting in excellent low-end torque.
- **Compacted yet durable and dependable engine** B series engine contains up to 40% fewer parts than competitive engines in its class. this result in a better power to weight ration, a less chance of failure and lower repair cost.
- **Advanced design and manufacturing** make the engine delivers superior performance and lower cost than competitive engines.
- **Excellent cold start performance** optional assistant cold starter with improved 7,8kw starter and intake air heater
- **Excellent performance and advantage** adopt advanced design to achieve higher horse power and lower weight horsepower per liter reached 23,0 Kw/l

L Series

- **24 Valve cylinder head** for increased air flow improved low end torque and response, higher power density improved fuel consumption and improved emissions.
- **heavy duty features** repiaceable wet liners, roller followers, 2 piece steel articulated pistons, by pass oil filtration and targeted piston cooling.
- **Durable and dependable** articulated pistons with a forged steel crown and aluminum skirt for high durability.
- **Excellent performance and advantage** adopt advanced design to achieve higher horsepower and lower height. horsepower per liter reached 23,0Kw/l

PRODUCTS.

Ratings

	Mode	Power	Torque
		kW/r/min	N.m/r/min
B3.9	4BT3.9-C80	60/2900	330/1500
	4BT3.9-C100	75/2900	330/1500
	4BT3.9-C105	77/2900	330/1500
	4BTA3.9-C110	82/2900	460/1400
	4BTA3.9-C125	93/2900	475/1500
	4BTA3.9-C130	97/2900	475/1500
B5.9 (6BT)	6BT5.9-C115	85/2900	430/1500
	6BT5.9-C120	87/2900	436/1500
	6BT5.9-C125	92/2900	425/1500
	6BT5.9-C130	97/2900	560/1500
	6BT5.9-C135	100/2900	570/1500
	6BT5.9-C135	100/2900	590/1500
	6BT5.9-C135	100/2900	560/1500
	6BT5.9-C145	106/2900	580/1500
	6BT5.9-C150	110/2900	560/1500
	6BT5.9-C150	112/2900	565/1500
	6BT5.9-C150	110/2900	580/1500
	6BT5.9-C150	112/2900	580/1500

	Mode	Power	Torque
		kW/r/min	N.m/r/min
B5.9 (6BTA)	6BTA5.9-C150	112/2900	630/1400
	6BTA5.9-C155	114/2900	637/1500
	6BTA5.9-C170	125/2900	630/1400
	6BTA5.9-C175	128/2900	680/1500
	6BTA5.9-C180	132/2900	750/1500
C8.3	6CTA8.3-C145	105/2900	674/1400
	6CTA8.3-C175	128/2900	820/1100
	6CTA8.3-C180	134/2900	837/1400
	6CTA8.3-C195	145/2900	820/1500
	6CTA8.3-C215	160/2900	908/1500
	6CTA8.3-C215	160/2900	908/1500
	6CTA8.3-C230	172/2900	1000/1500
	6CTA8.3-C245	179/2900	1028/1500
L8.9	6LTAA8.9-C325	250/2900	1350/1400



PT. BERJAYA MAKMUR INDONESIA

Komplek DDN, Jl Danau Cibubur Asri II, Kav.23, Harjamukti,
Cimanggis, Kota Depok, Jawa Barat 16454
Email : berjayamakmur99@gmail.com
Website : <http://www.arthur.comli.com>