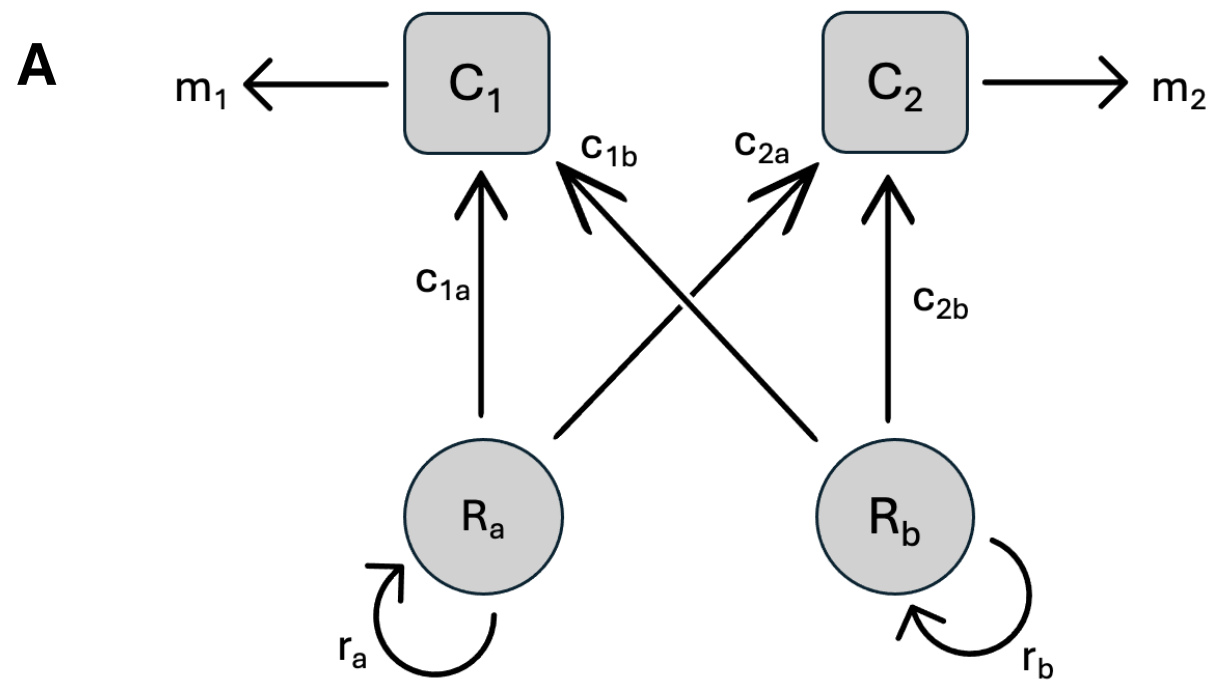
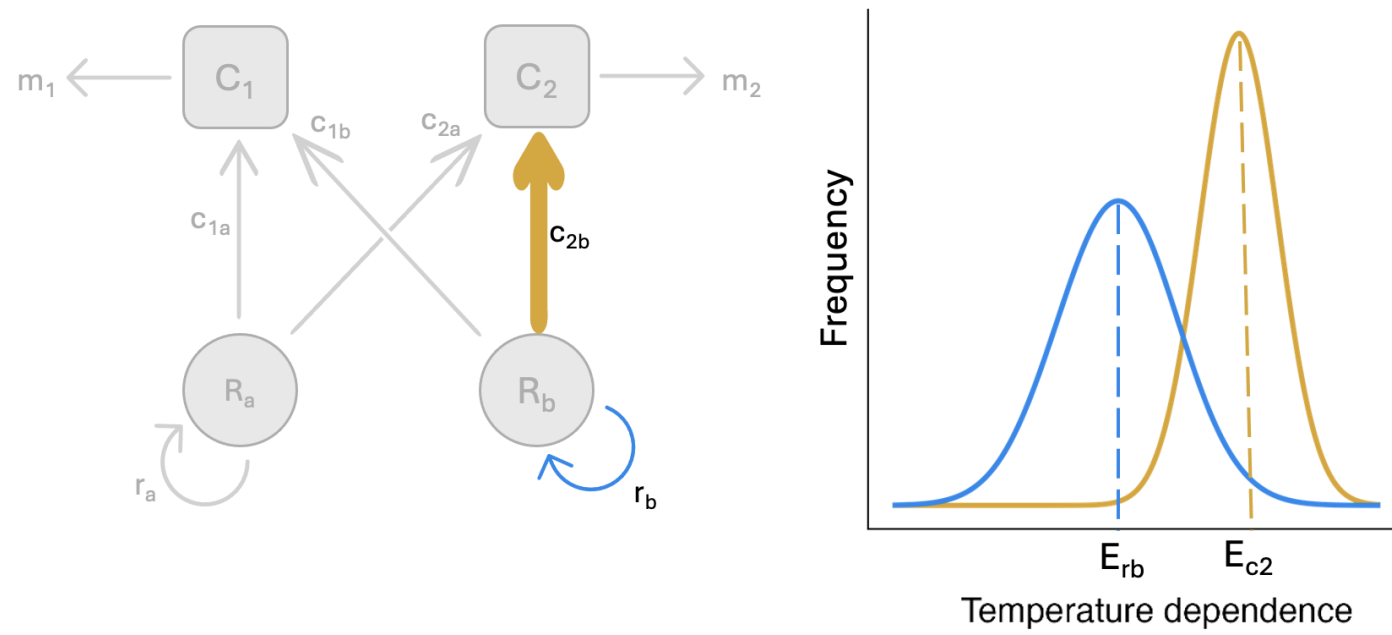
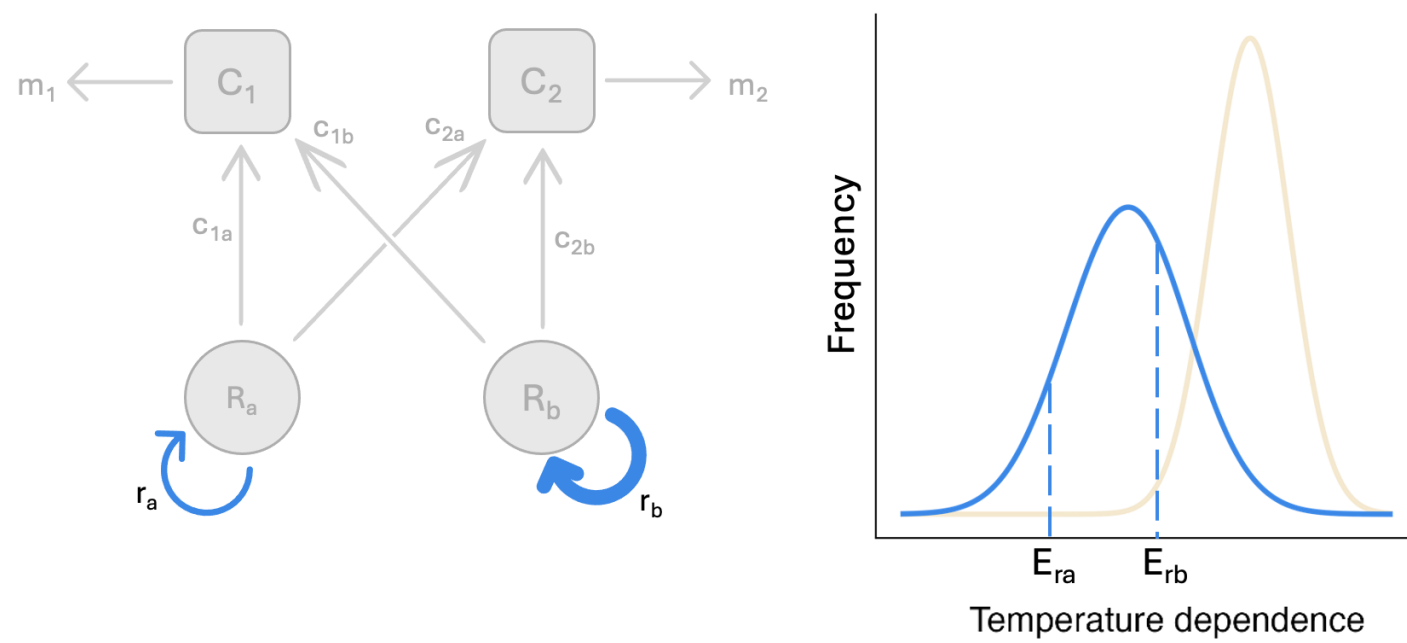


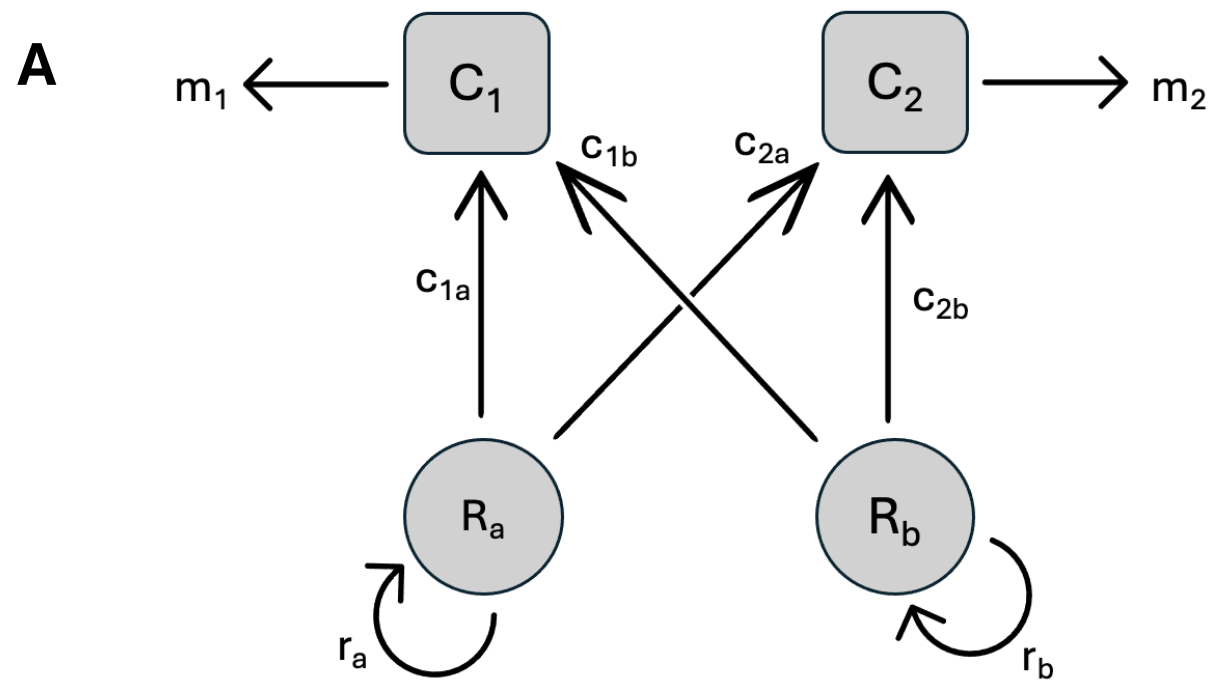


B Inter-process thermal asymmetry

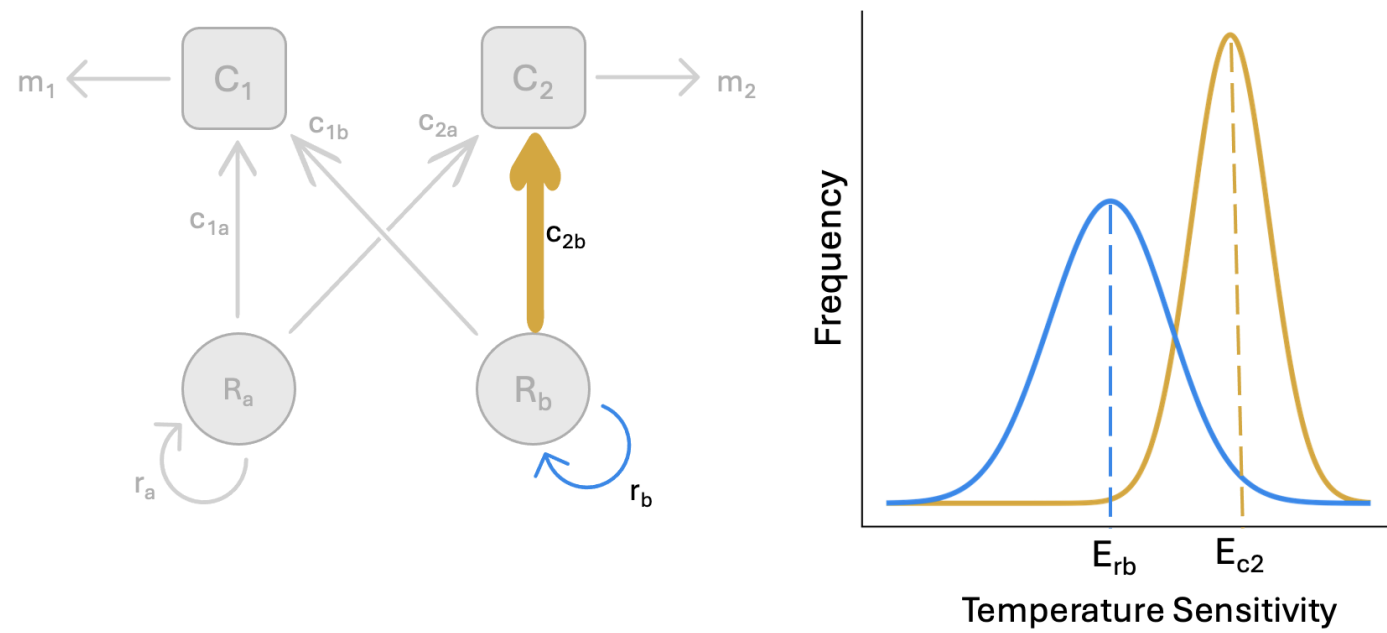


C Intra-process thermal asymmetry

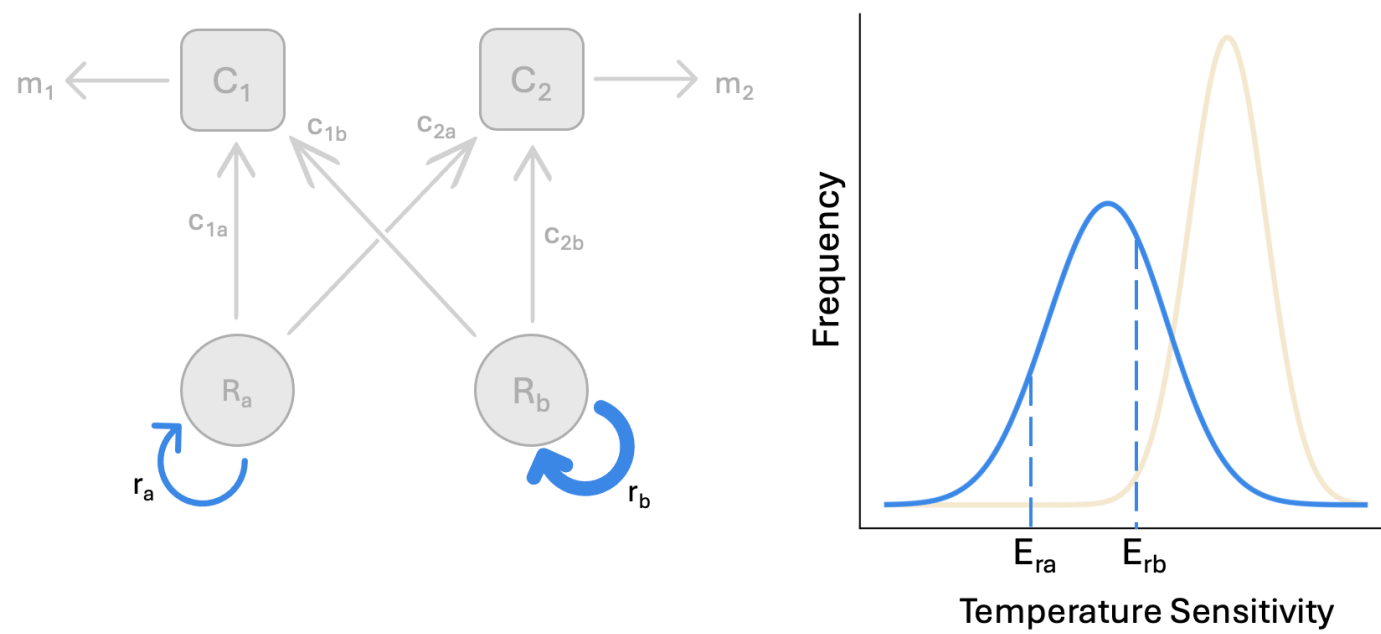


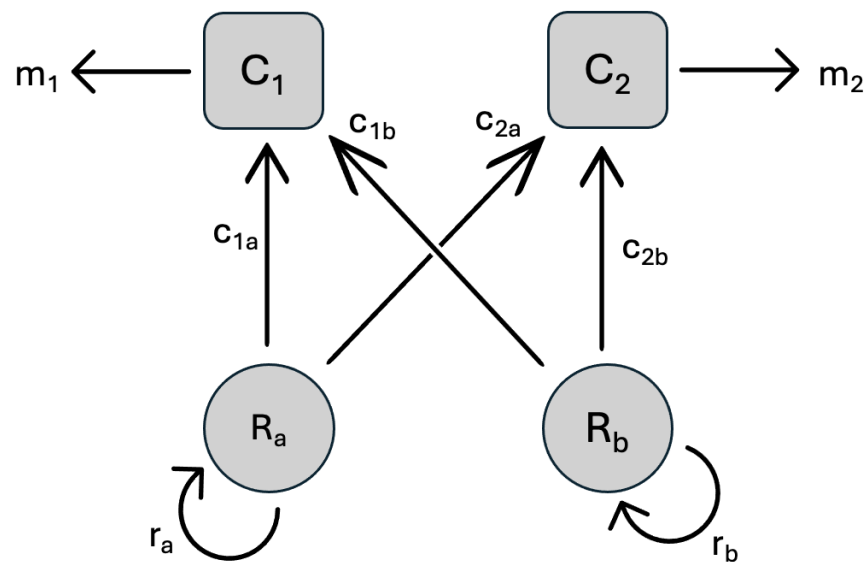
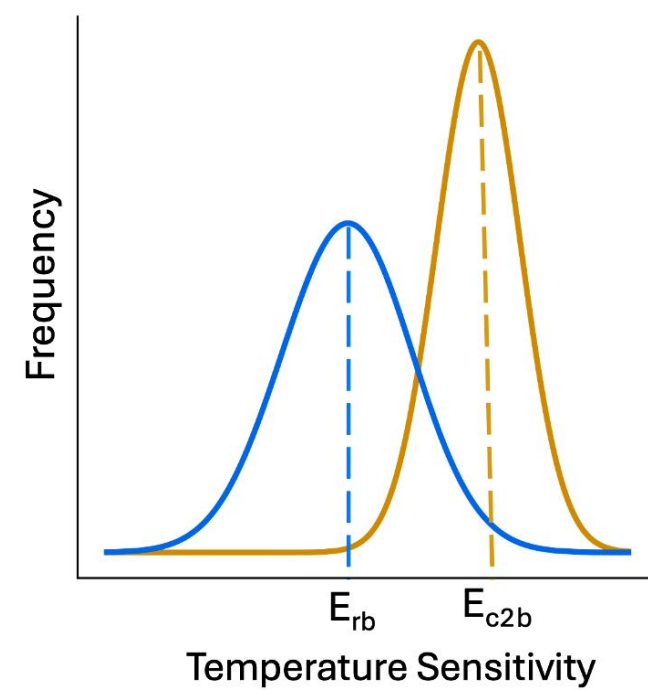
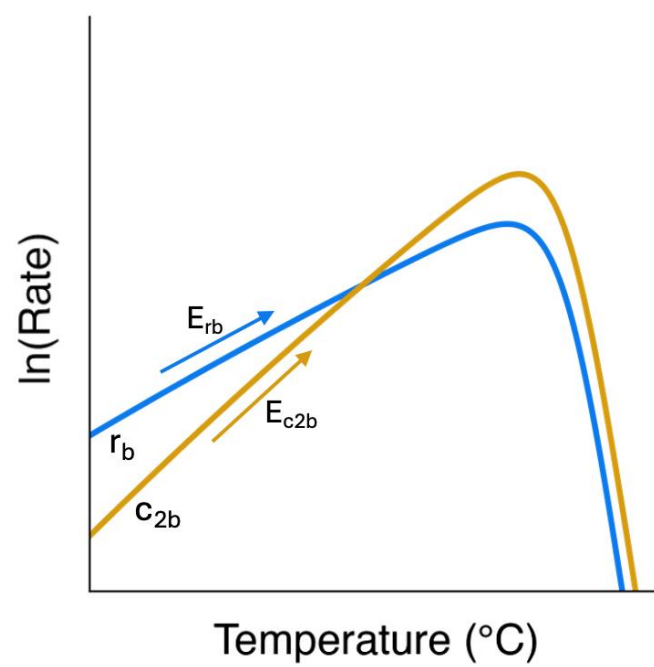
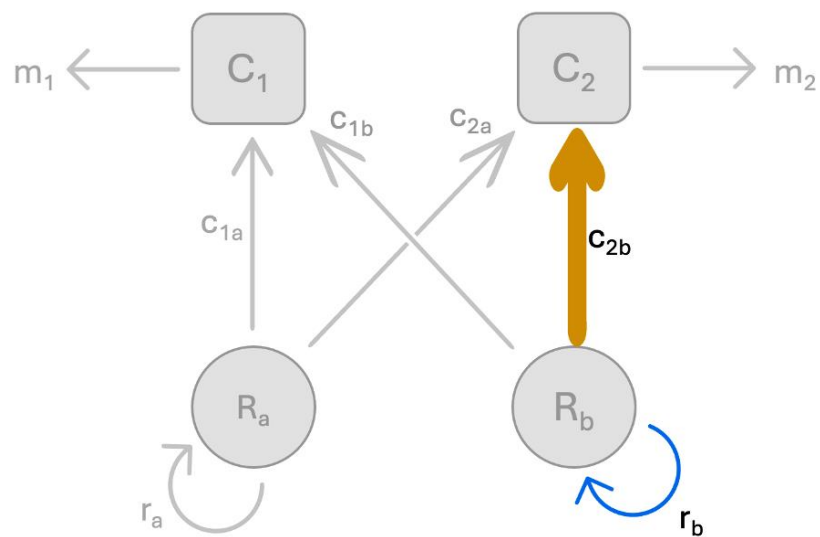
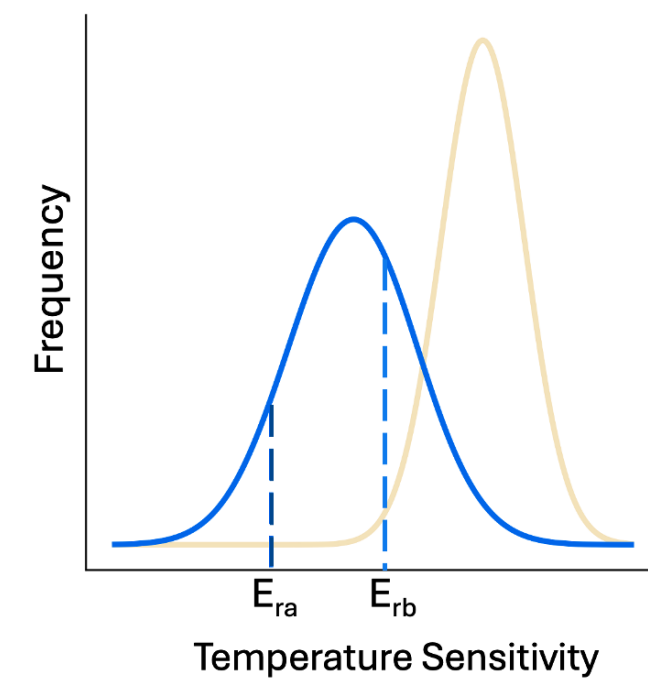
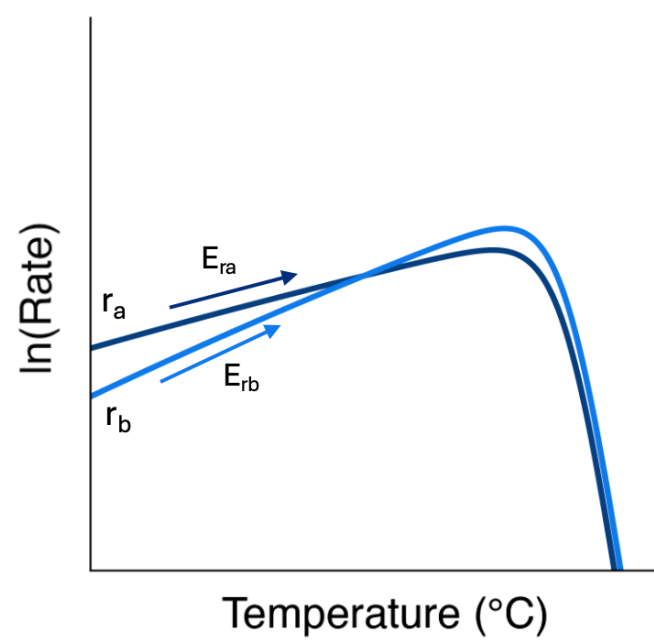
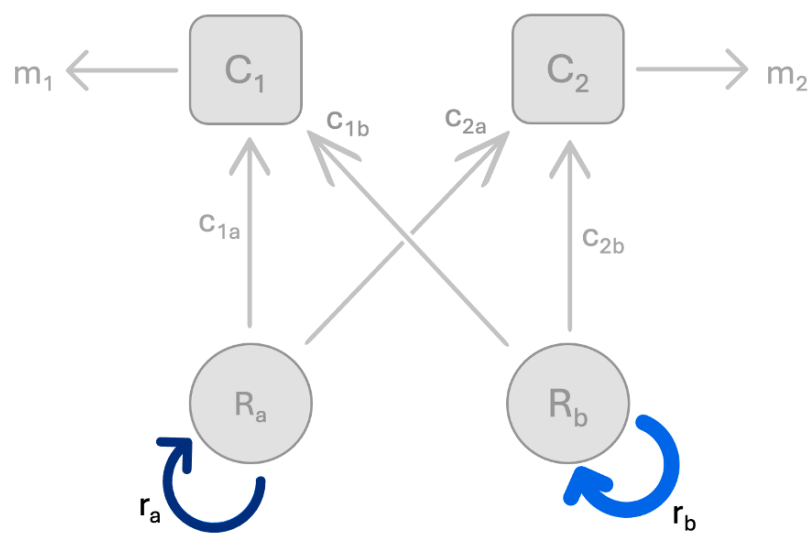


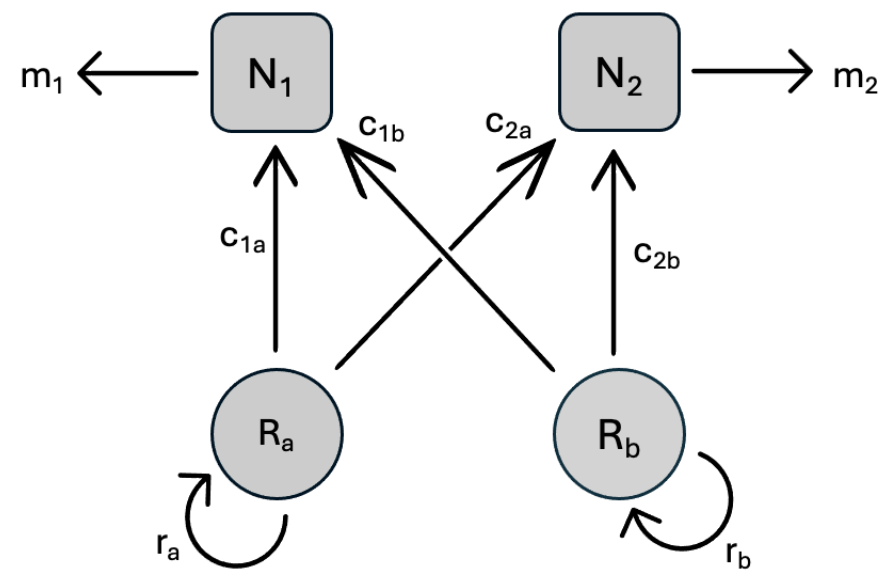
B Inter-process thermal asymmetry



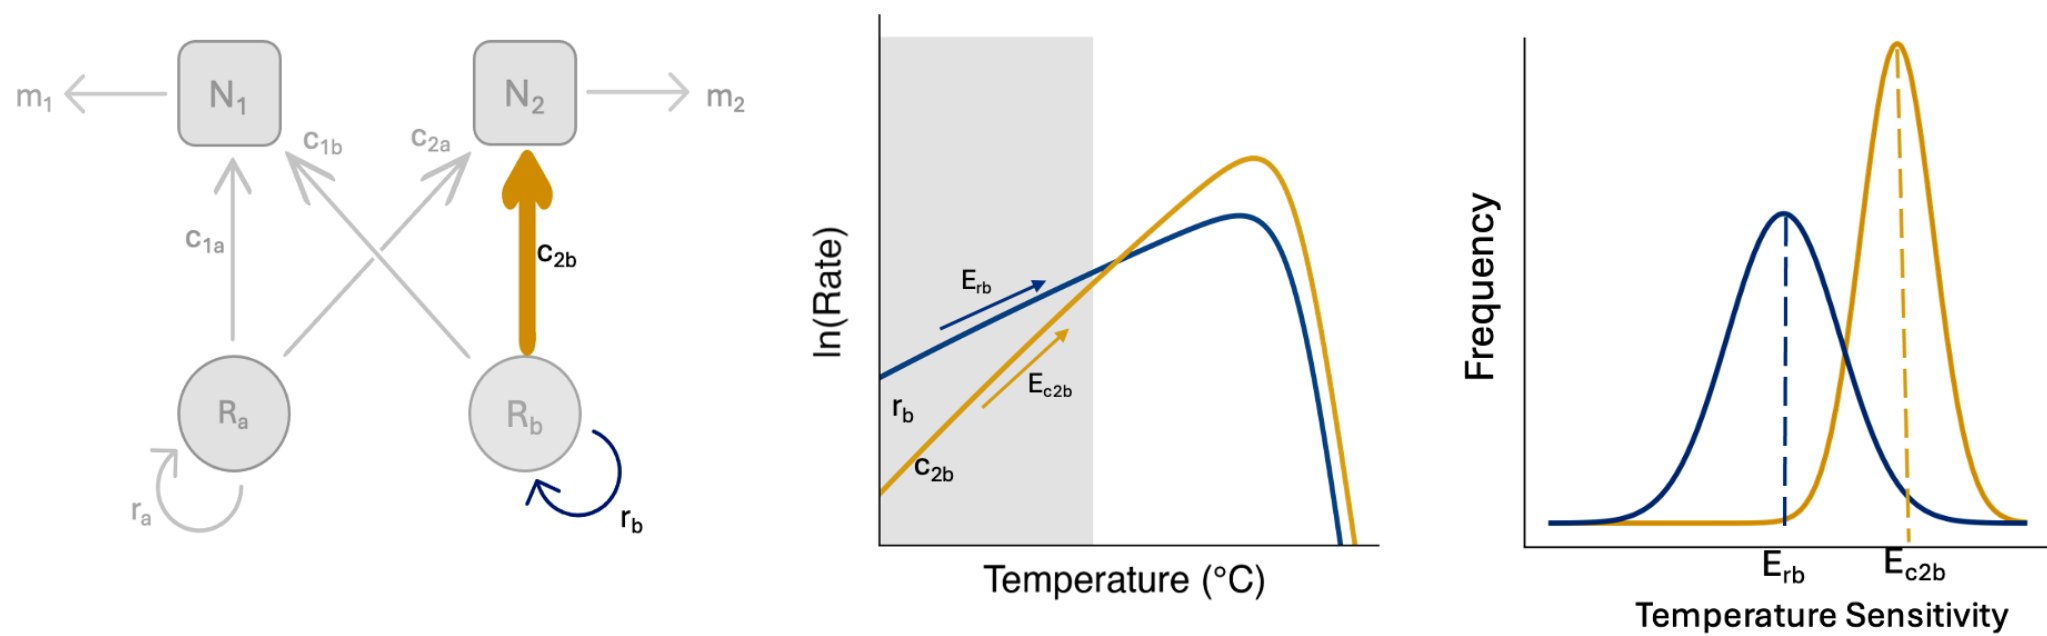
C Intra-process thermal asymmetry



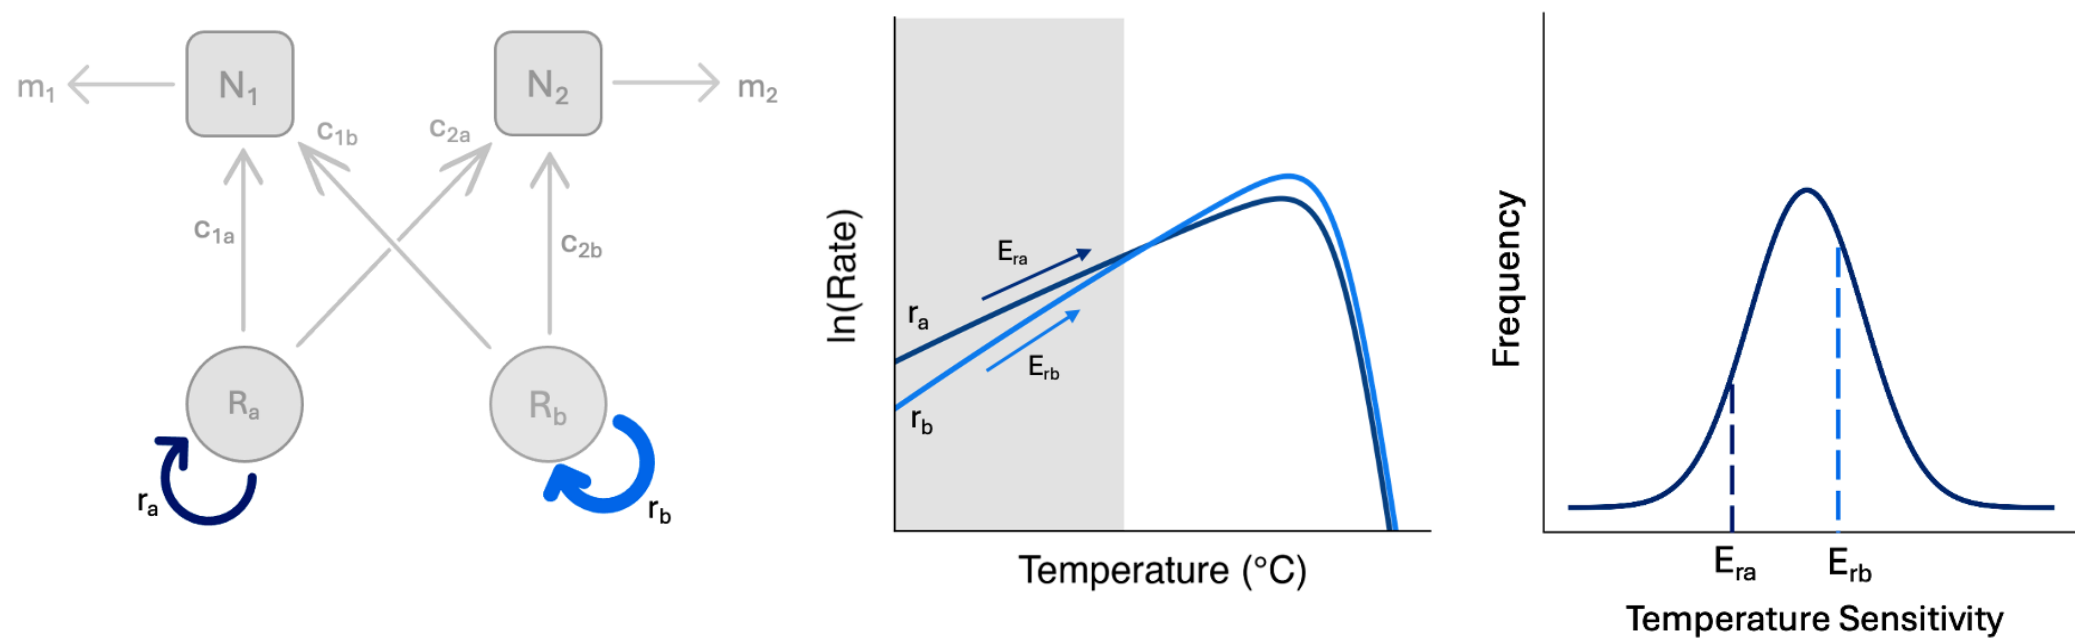
A**B****Inter-process thermal asymmetry****C****Intra-process thermal asymmetry**

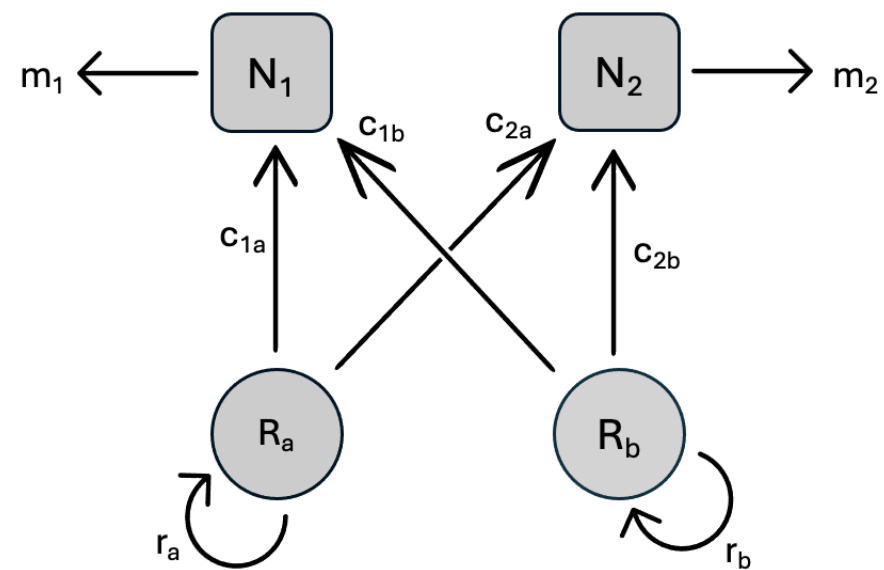
A**B**

Inter-process thermal asymmetry

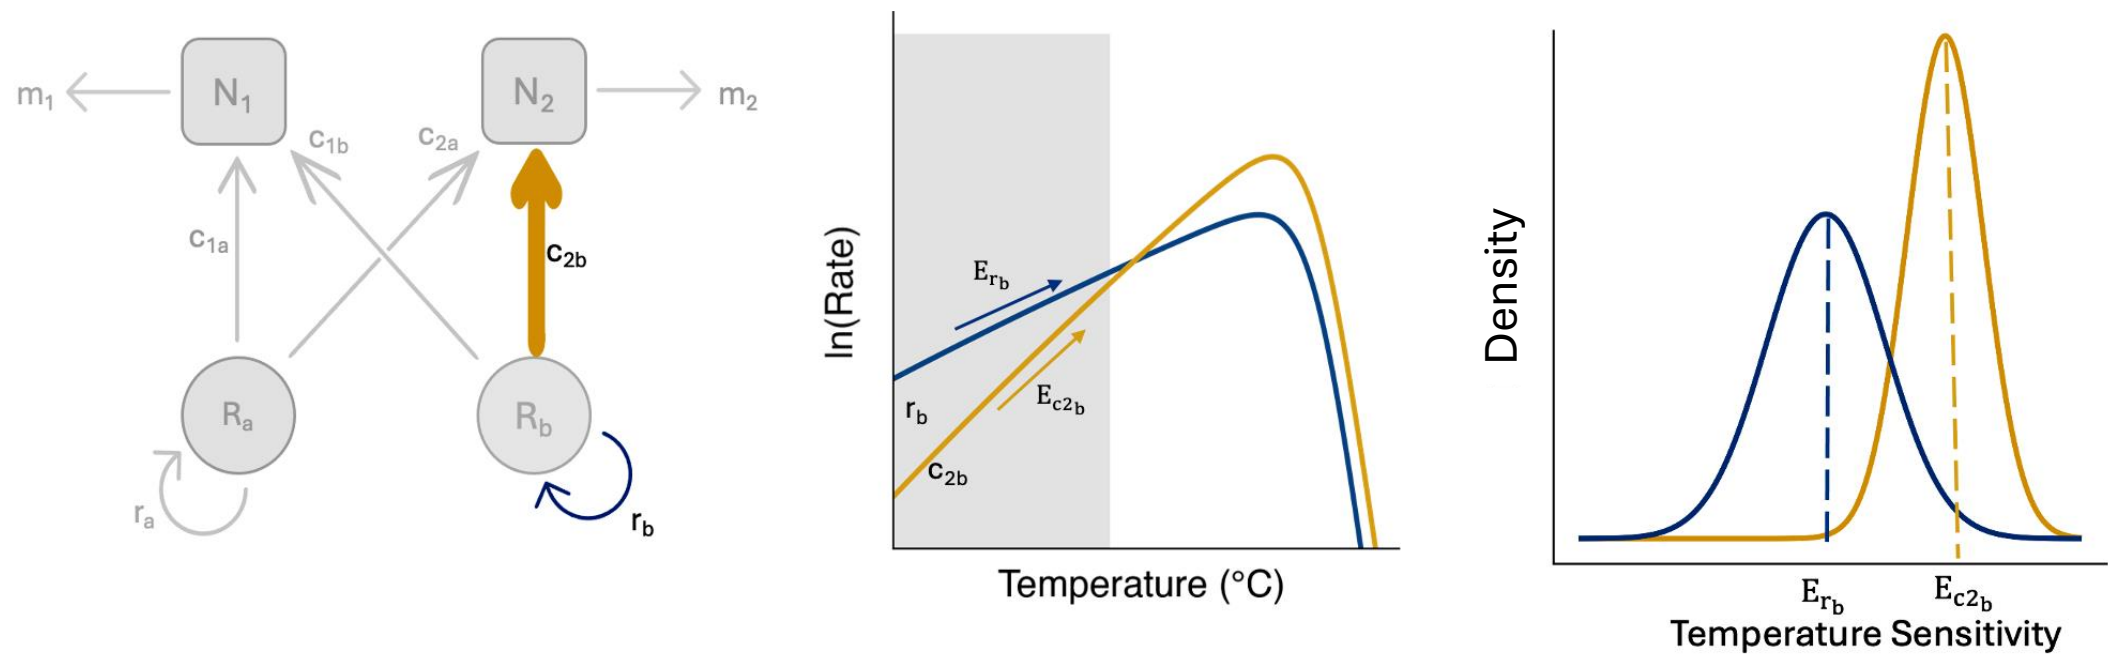
**C**

Intra-process thermal asymmetry

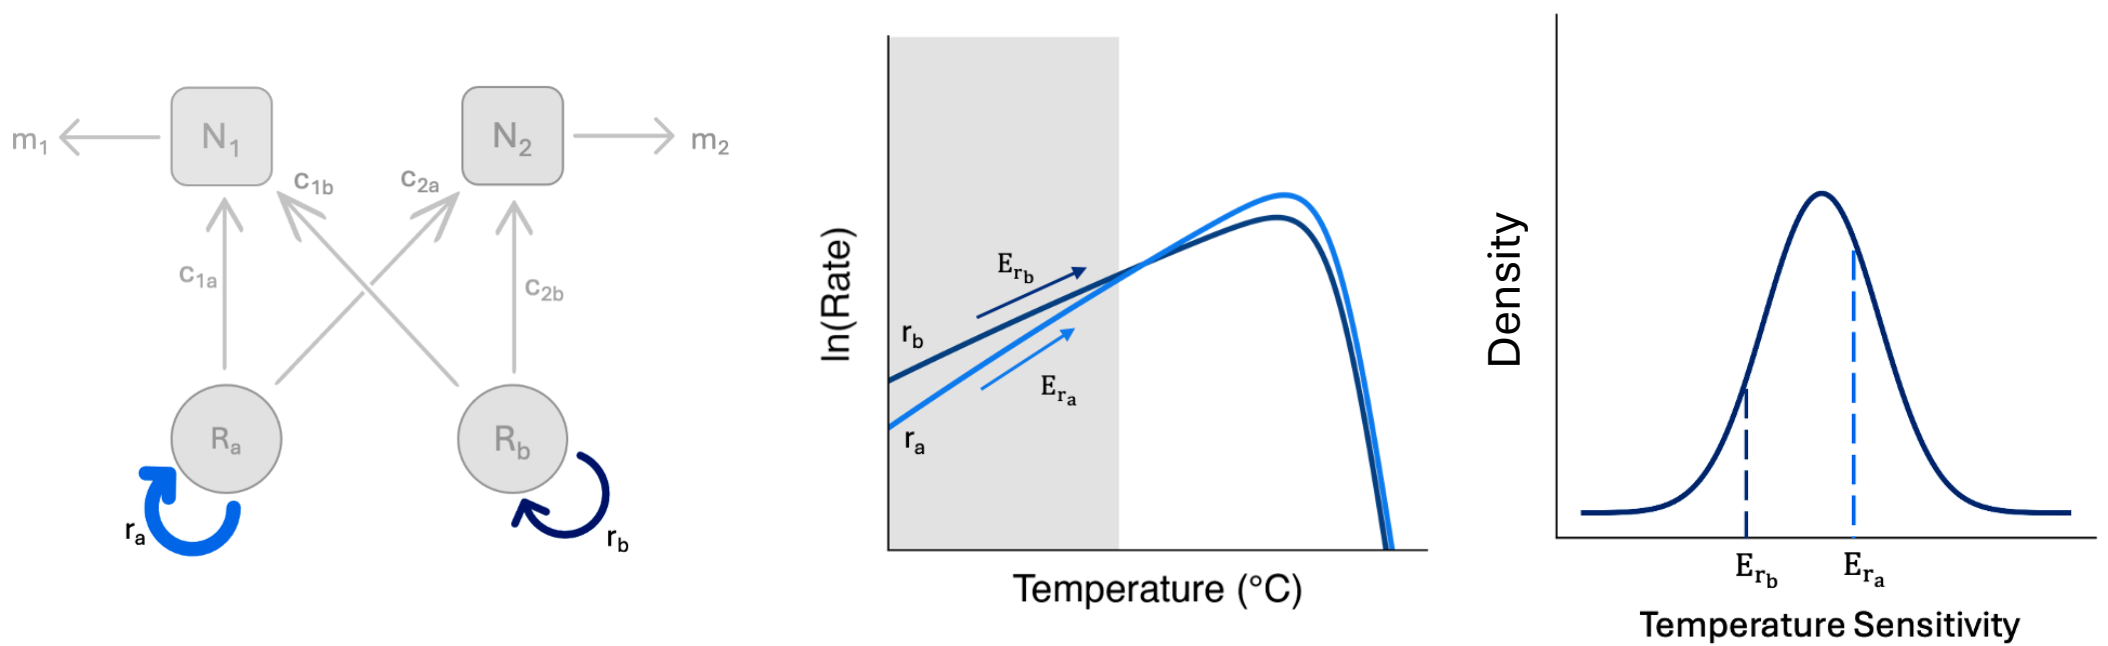


A**B**

Inter-process thermal asymmetry

**C**

Intra-process thermal asymmetry



The diagram illustrates a two-stage system. At the top, two rectangular nodes are labeled N_1 and N_2 . Node N_1 has an outgoing arrow to the left labeled m_1 . Node N_2 has an outgoing arrow to the right labeled m_2 . Below these are two circular nodes labeled R_a and R_b . Node R_a has a self-loop arrow labeled r_a . Node R_b has a self-loop arrow labeled r_b . Directed arrows connect the nodes: from R_a to N_1 labeled c_{1a} , from R_b to N_1 labeled c_{1b} , from R_a to N_2 labeled c_{2a} , and from R_b to N_2 labeled c_{2b} .

The diagram illustrates a two-stage system. At the top, two square nodes are labeled N_1 and N_2 . Node N_1 has an incoming arrow from the left labeled m_1 and an outgoing arrow to the left. Node N_2 has an outgoing arrow to the right labeled m_2 and an incoming arrow from the right. Below these nodes are two circular nodes labeled R_a and R_b . Node R_a has a curved arrow labeled r_a pointing clockwise. Node R_b has a curved arrow labeled r_b pointing clockwise. There are four directed edges between the nodes: a vertical arrow from R_a to N_1 labeled C_{1a} , a diagonal arrow from R_b to N_1 labeled C_{1b} , a diagonal arrow from R_a to N_2 labeled C_{2a} , and a vertical arrow from R_b to N_2 labeled C_{2b} . The arrow C_{2b} is highlighted in orange.

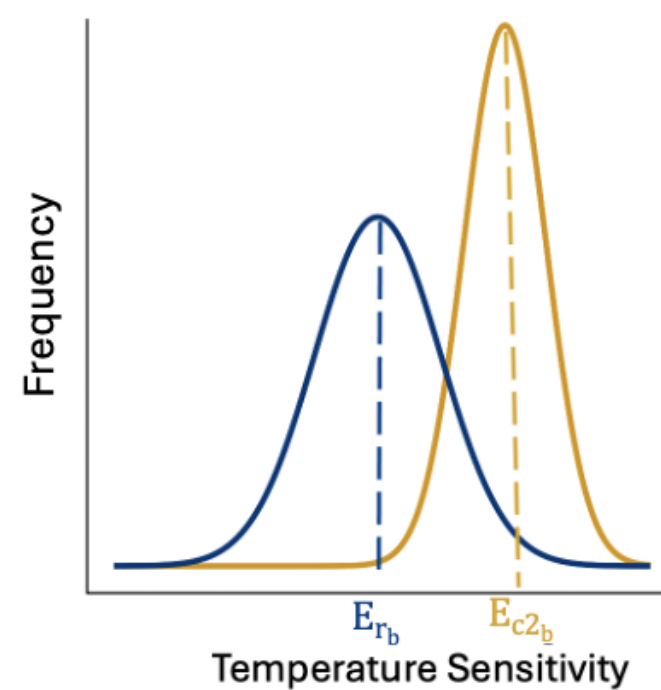
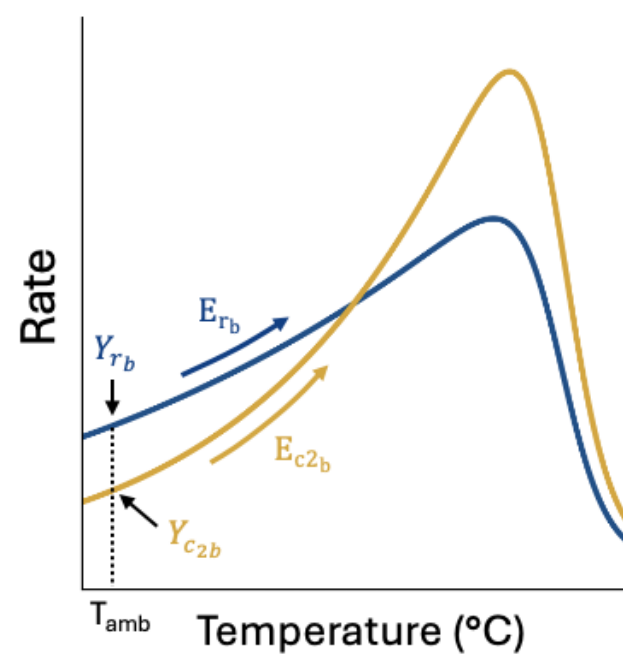
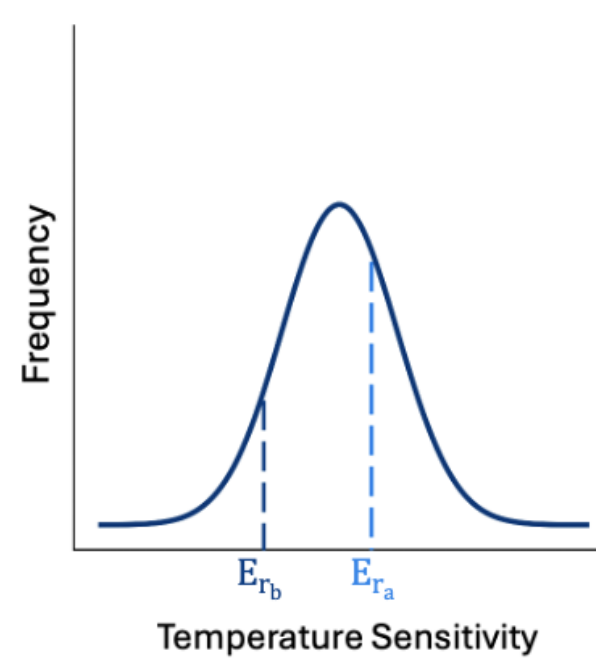
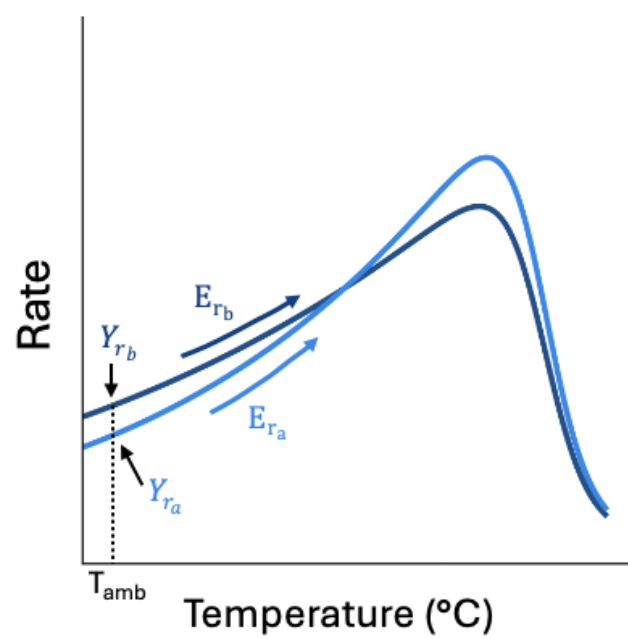
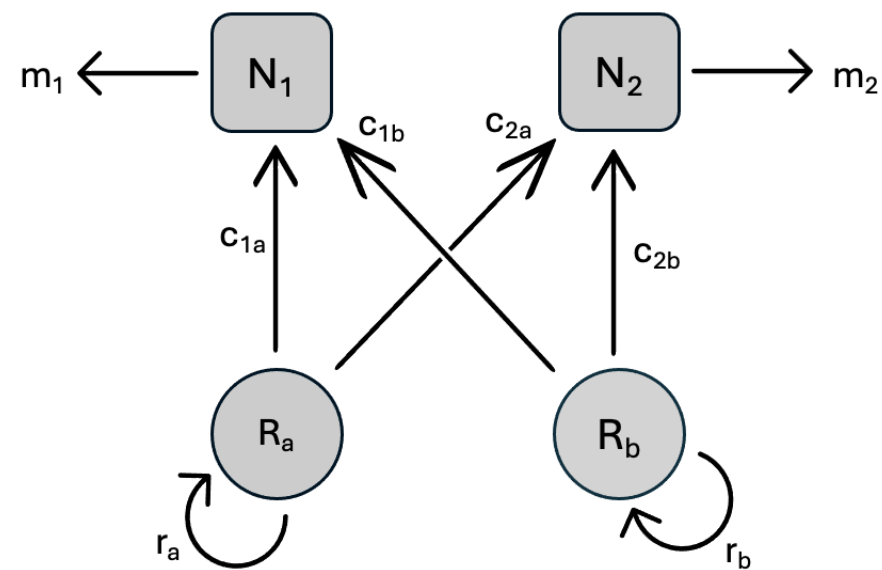


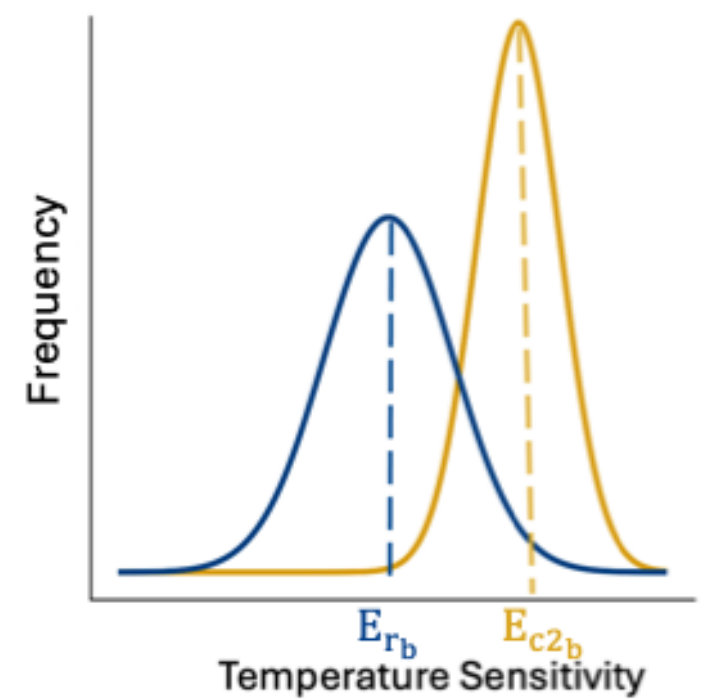
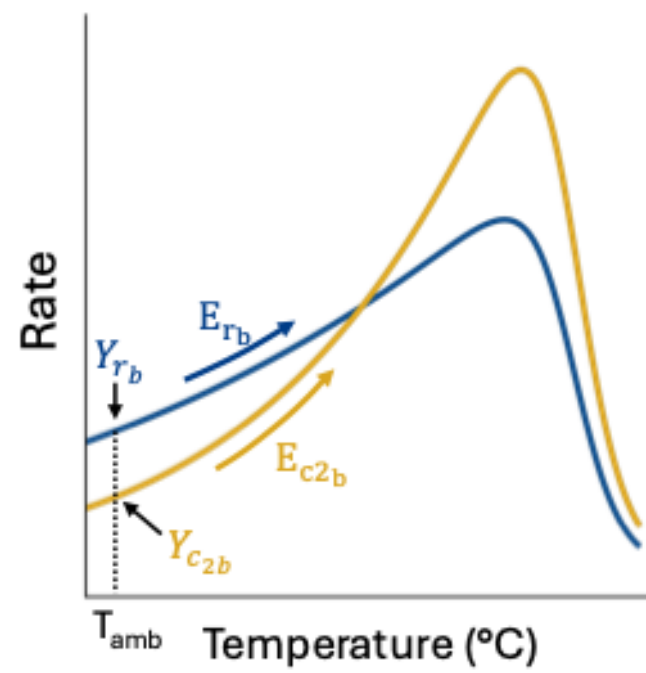
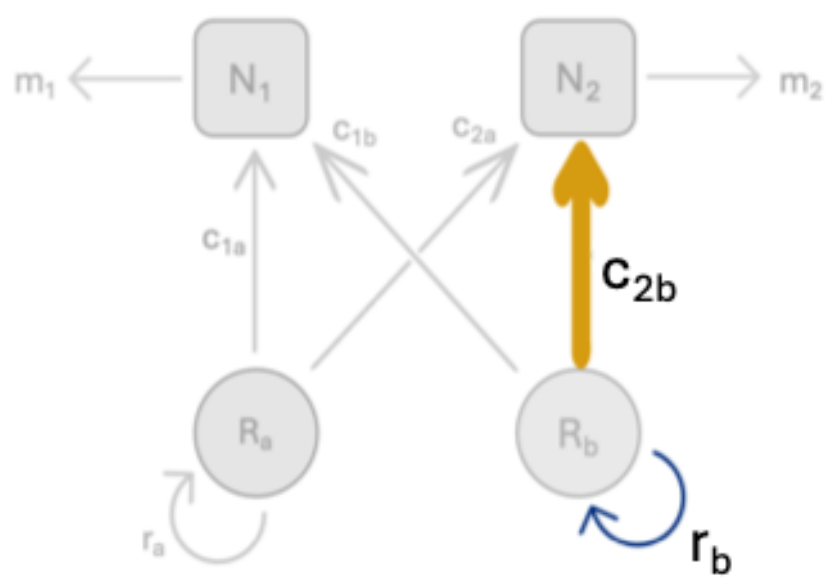
Diagram illustrating a two-stage system with two input nodes (R_a and R_b) and two output nodes (N_1 and N_2).

- Input nodes R_a and R_b are represented by circles, with R_a having a clockwise rotation r_a and R_b having a counter-clockwise rotation r_b .
- Output nodes N_1 and N_2 are represented by squares, with N_1 outputting m_1 and N_2 outputting m_2 .
- Connections between input and output nodes are labeled with coefficients:
 - C_{1a} from R_a to N_1
 - C_{1b} from R_b to N_1
 - C_{2a} from R_a to N_2
 - C_{2b} from R_b to N_2



A**B**

Inter-process thermal asymmetry

**C**

Intra-process thermal asymmetry

