



Headlamp switch, Exterior lamps

Schematic

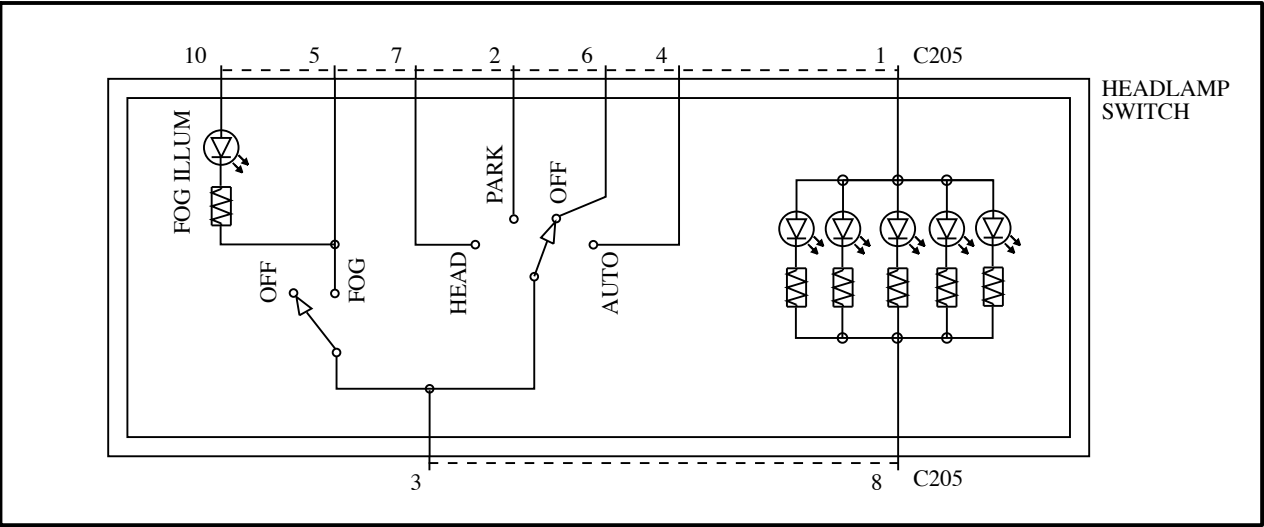

Terminals

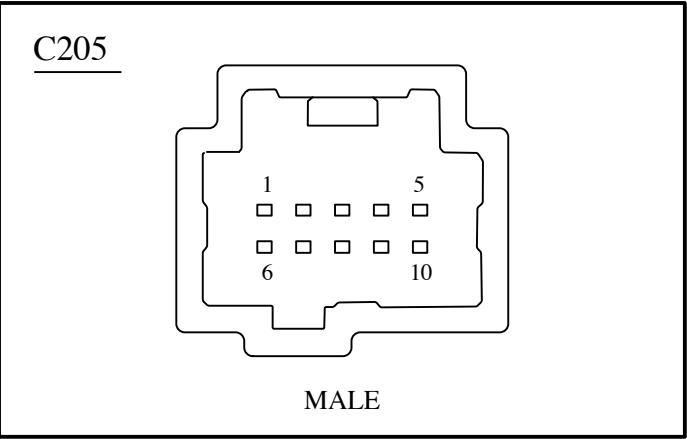

Component testing procedure

Circuit to test	Connect self-powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Headlamp circuit	3 and 7	Off	Open circuit
		Park	Open circuit
		Low	Closed circuit
		Auto	Open circuit
Autolamp circuit	3 and 4	Off	Open circuit
		Park	Open circuit
		Low	Open circuit
		Auto	Closed circuit
Parking lamps	3 and 2	Off	Open circuit
		Park	Closed circuit
		Low	Open circuit
		Auto	Open circuit
Fog lamps	3 and 5	Off	Open circuit
		Fog lamps	Closed circuit
Off	3 and 6	Off	Closed circuit
		Park	Open circuit
		Low	Open circuit
		Auto	Open circuit

