



Seat control switch, 6 - way

Schematic

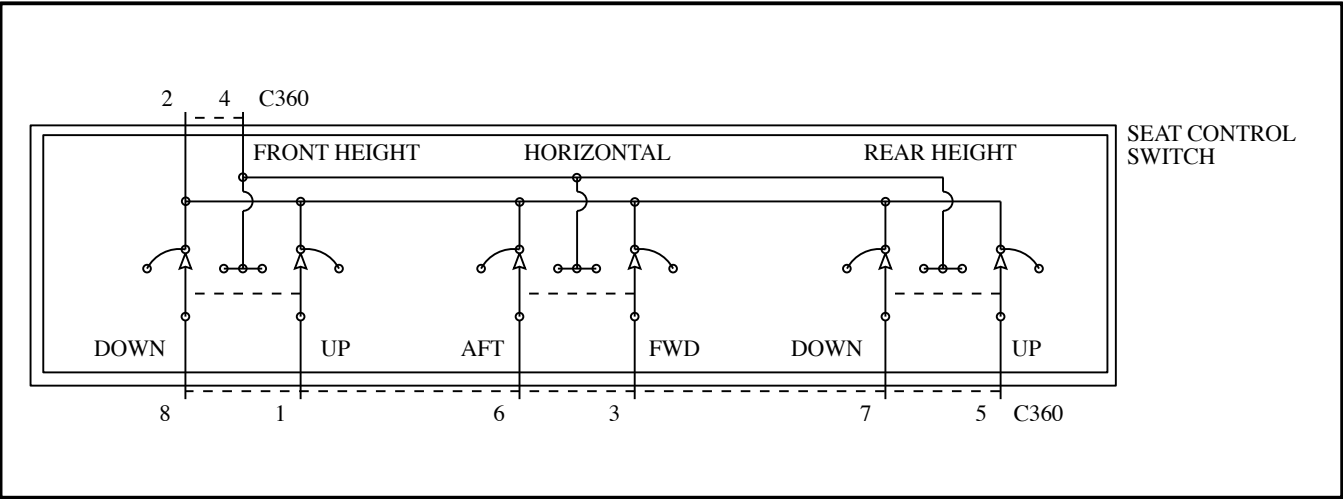

Terminals

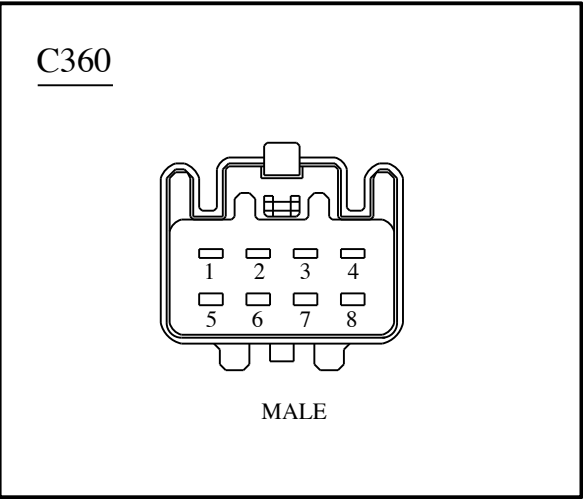

Component testing procedure

Circuit to test	Connect self-powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Horizontal circuit	4 and 3 6 and 2	Forward	Closed circuit
			Closed circuit
	4 and 6 3 and 2	Rearward	Closed circuit
			Closed circuit
Front Height circuit	4 and 1 8 and 2	Up	Closed circuit
			Closed circuit
	4 and 8 1 and 2	Down	Closed circuit
			Closed circuit
Rear Height circuit	4 and 5 7 and 2	Up	Closed circuit
			Closed circuit
	4 and 7 5 and 2	Down	Closed circuit
			Closed circuit

