


Seat control switch, 10 - way

Schematic

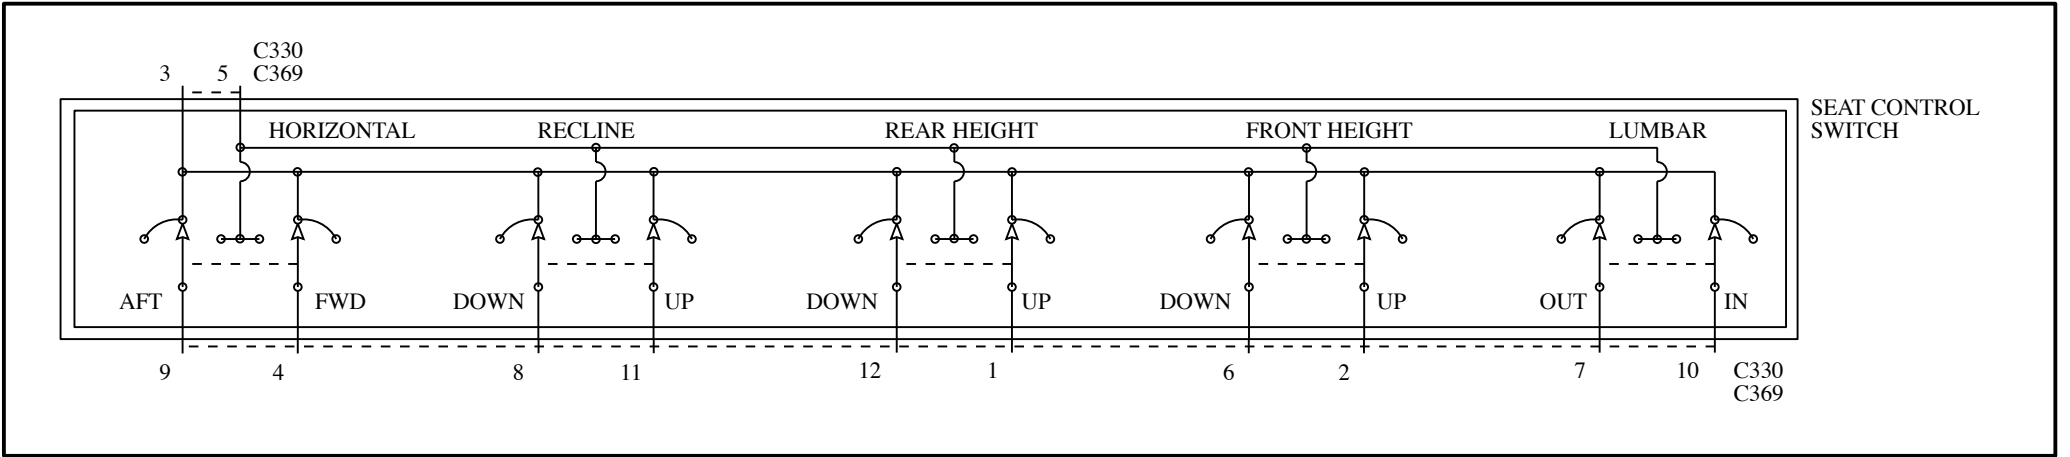

Component testing procedure

Circuit to test	Connect self-powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Horizontal circuit	5 and 4 9 and 3	Forward	Closed circuit
			Closed circuit
	5 and 9 4 and 3	Rearward	Closed circuit
			Closed circuit
Front Height circuit	5 and 2 6 and 3	Up	Closed circuit
			Closed circuit
	5 and 6 2 and 3	Down	Closed circuit
			Closed circuit
Rear Height circuit	5 and 1 12 and 3	Up	Closed circuit
			Closed circuit
	5 and 12 1 and 3	Down	Closed circuit
			Closed circuit
Recline circuit	5 and 11 8 and 3	Up	Closed circuit
			Closed circuit
	5 and 8 11 and 3	Down	Closed circuit
			Closed circuit
Lumbar circuit	5 and 7 10 and 3	Out	Closed circuit
			Closed circuit
	5 and 10 7 and 3	In	Closed circuit
			Closed circuit

Terminals

