



# Power door lock switch

## Schematic

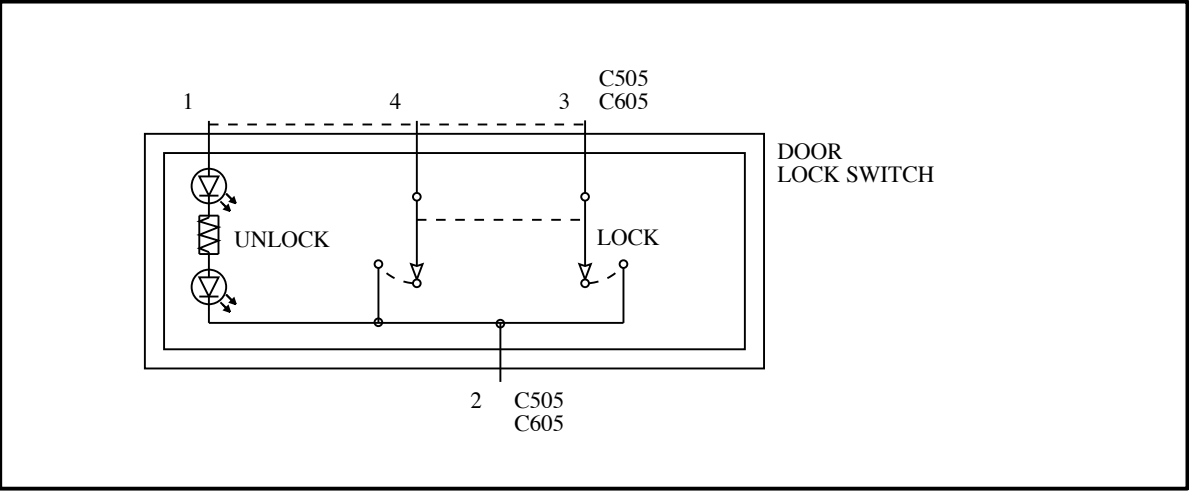

## Terminal locations

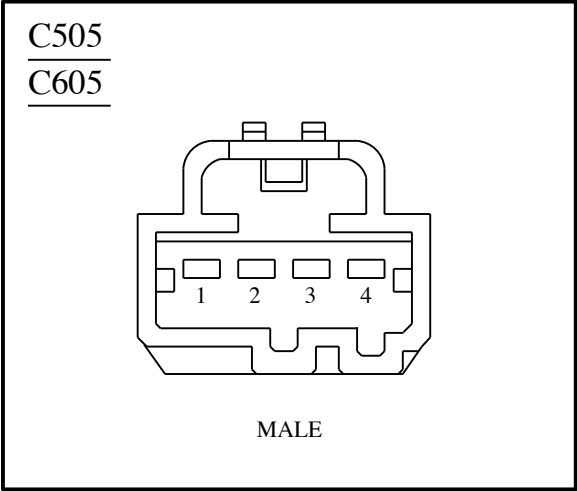

## Component testing procedure

| Circuit to test     | Connect self-powered test light or ohmmeter to terminals | Move switch to these positions | A good switch will indicate |
|---------------------|----------------------------------------------------------|--------------------------------|-----------------------------|
| Lock/unlock circuit | 4 and 2                                                  | Rest                           | Open circuit                |
|                     |                                                          | Lock                           | Open circuit                |
|                     |                                                          | Unlock                         | Closed circuit              |
|                     | 3 and 2                                                  | Rest                           | Open circuit                |
|                     |                                                          | Lock                           | Closed circuit              |
|                     |                                                          | Unlock                         | Open circuit                |

