
Ex.No:3: MATLAB-BASED MODELLING OF VSB MODULATOR AND DEMODULATOR FOR ANALOG TELEVISION COMMUNICATION APPLICATIONS

Objective 1:

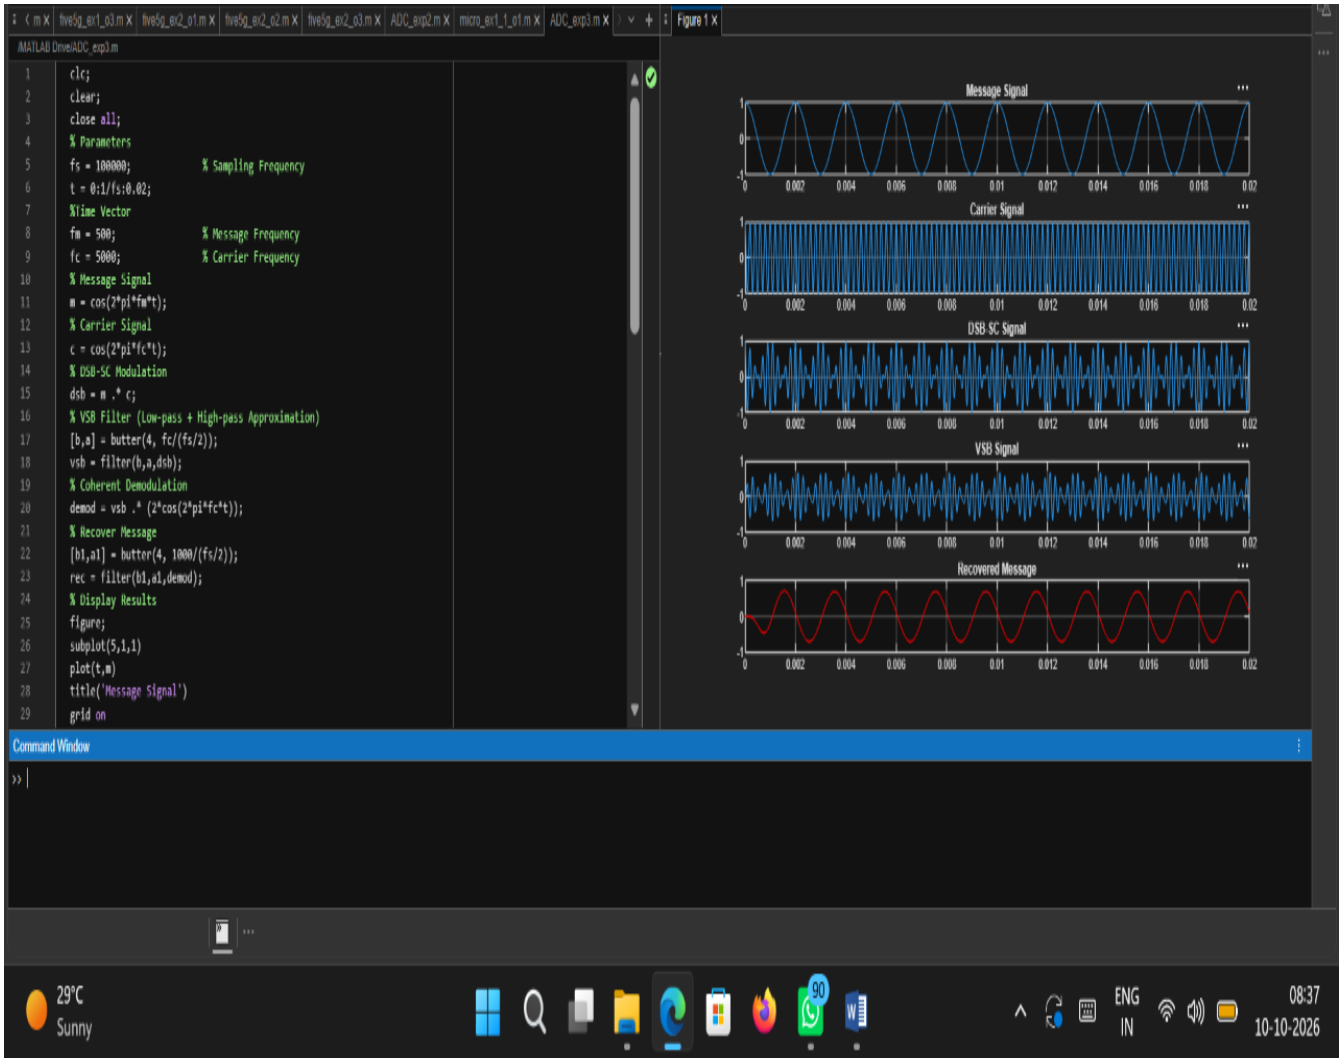

Code:

clc;

clear;

close all;


% Parameters

fs = 100000; % Sampling Frequency

```
t = 0:1/fs:0.02;
%Time Vector
fm = 500;              % Message Frequency
fc = 5000;             % Carrier Frequency
% Message Signal
m = cos(2*pi*fm*t);
% Carrier Signal
c = cos(2*pi*fc*t);
% DSB-SC Modulation
dsb = m .* c;
% VSB Filter (Low-pass + High-pass Approximation)
[b,a] = butter(4, fc/(fs/2));
vsb = filter(b,a,dsb);
% Coherent Demodulation
demod = vsb .* (2*cos(2*pi*fc*t));
% Recover Message
[b1,a1] = butter(4, 1000/(fs/2));
rec = filter(b1,a1,demod);
% Display Results
figure;
subplot(5,1,1)
plot(t,m)
title('Message Signal')
grid on
subplot(5,1,2)
```

```
plot(t,c)
title('Carrier Signal')
grid on
subplot(5,1,3)
plot(t,dsb)
title('DSB-SC Signal')
grid on
subplot(5,1,4)
plot(t,vsb)
title('VSB Signal')
grid on
subplot(5,1,5)
plot(t,rec,'r')
title('Recovered Message')
grid on
```

Output:

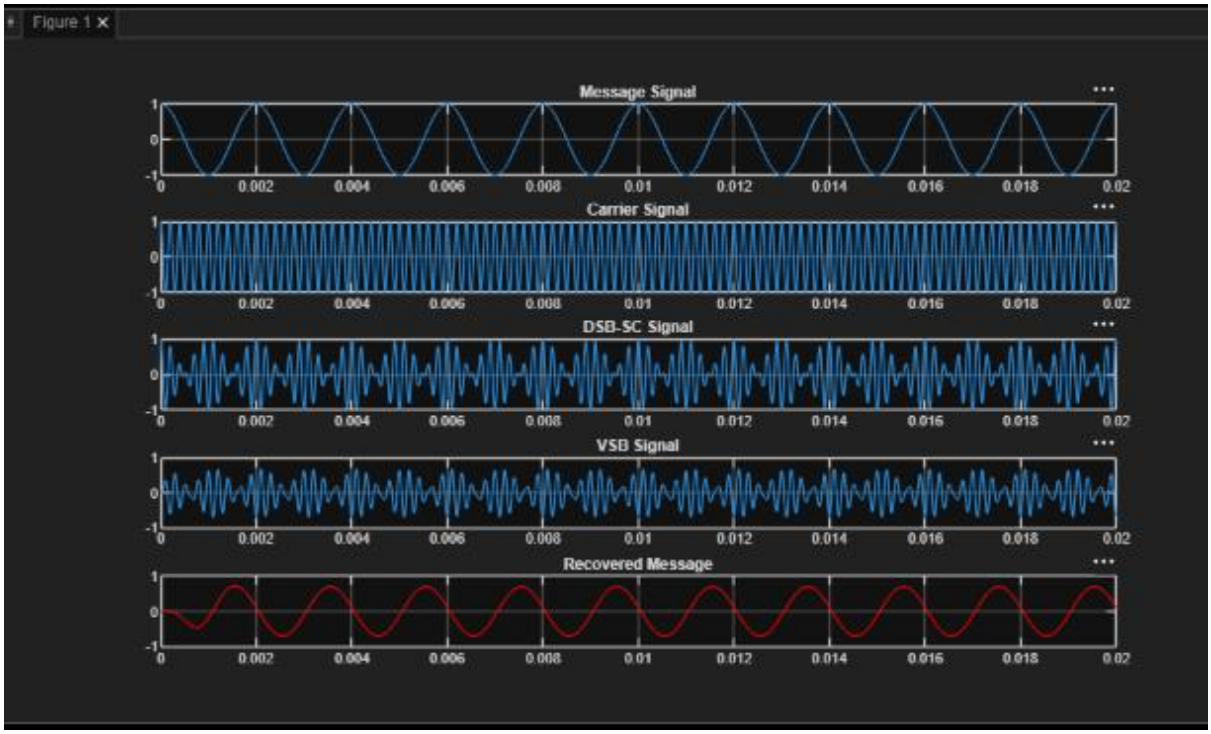
Figure 1
Message Signal
Carrier Signal
DSB-SC Signal
VSB Signal
Recovered Message
1
0
-1
0
0.002
0.004
0.006
0.008
0.01
0.012
0.014
0.016
0.018
0.02