

MMB

Morsbach Maschinenbau GmbH.

MMB 10" SUBMERSIBLE PUMP 10S /2500 MODELS CATALOGUE



STAINLESS STEEL SUBMERSIBLE PUMPS


Nominal Diameter: **10"**

Nominal Flow: **160m³/h**

Outlet Size: **6"**

Flow Range: **110-180m³/h**

Performance Curves: From 1 to 15 Stages

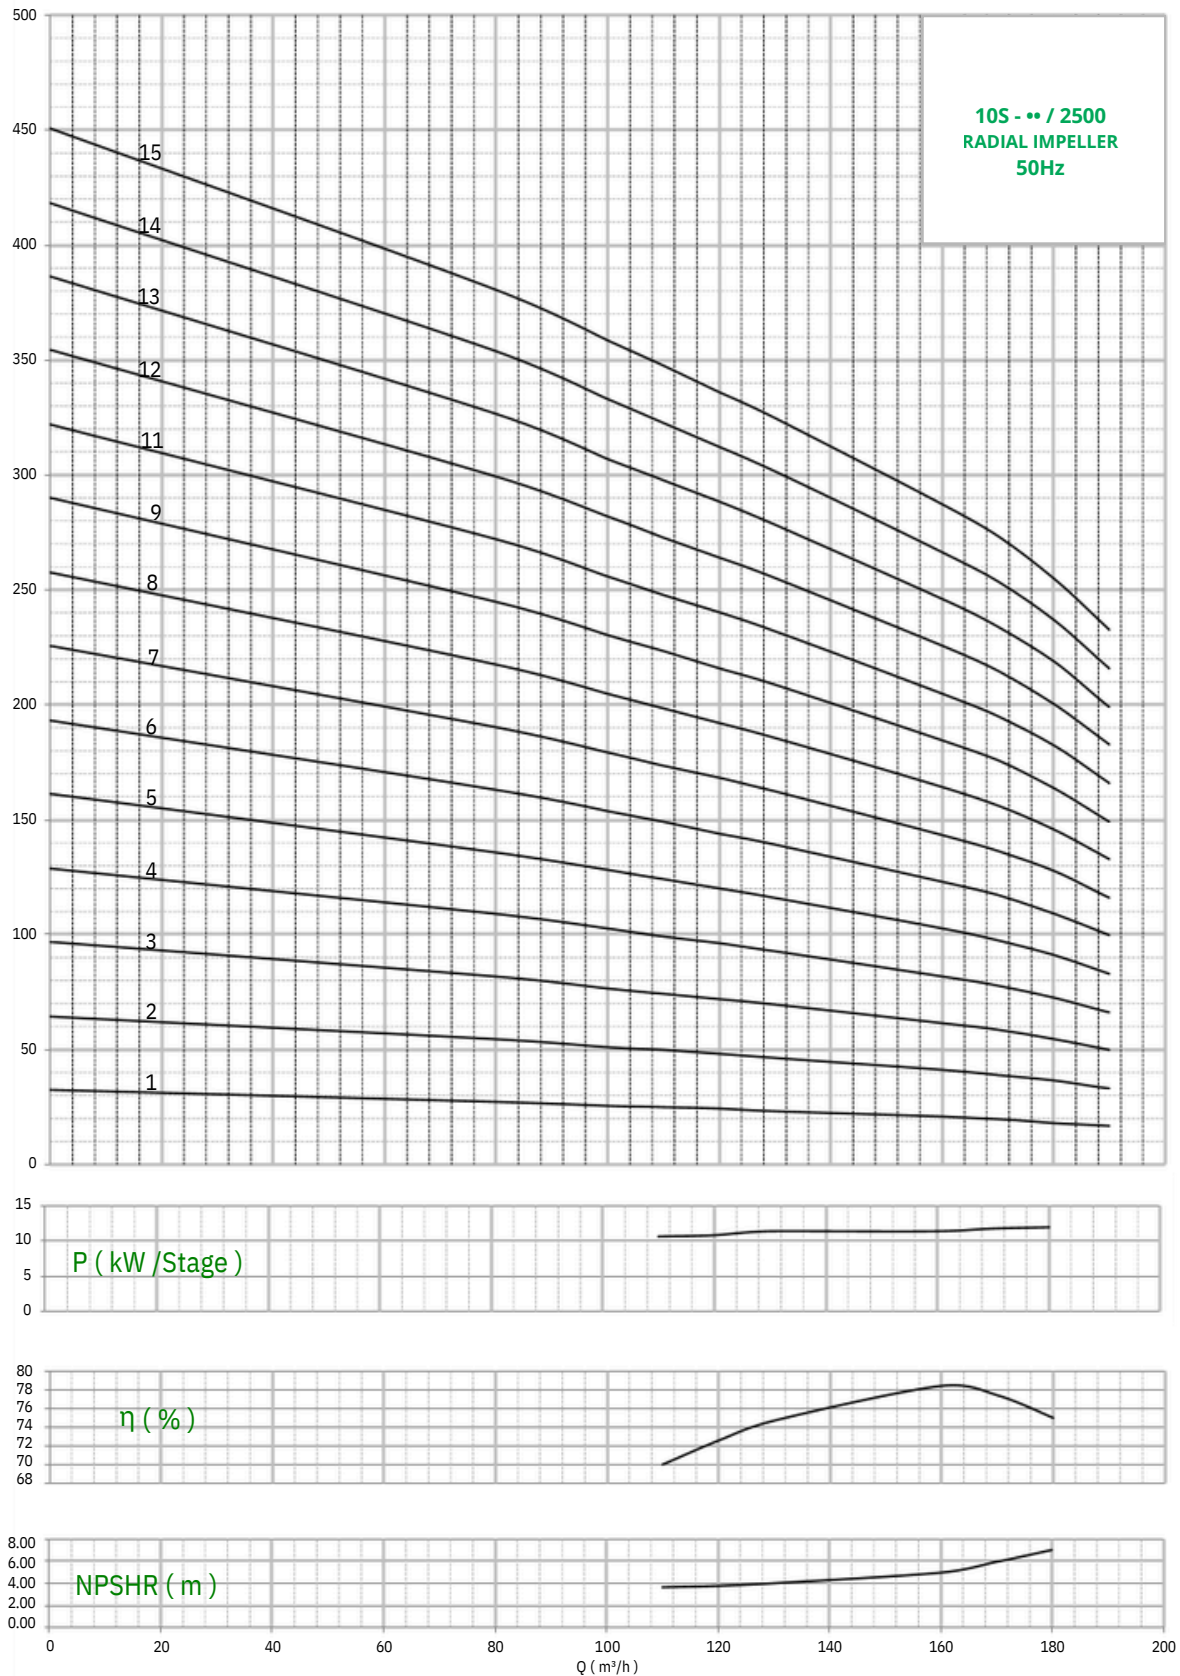

Refer General Information for performance curve conditions and for other details. Curves tolerance according to ISO : 9906, Annex - A

Morsbach Maschinenbau GmbH
Zur Hardt 6, 51597 Morsbach-Überholz, Germany
Tel: +49 2294 599 | Fax: +49 2294 6121

STAINLESS STEEL SUBMERSIBLE PUMPS

Nominal Diameter: **10"**


Nominal Flow: **160m³/h**

Outlet Size: **6"**

Flow Range: **110-180m³/h**

Performance Curves : From 1 to 15 Stages

DIMENSIONS & WEIGHT

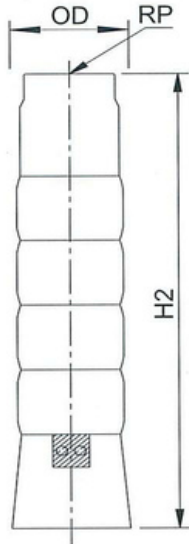

PUMP MODEL	No. of Stages	REQUIRED MOTOR POWER		APROX. DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
		Kw	HP	#OD	RP	H2	
10S-01/2000	1	13	17.5	225	6"	644	30.6
10S-02/2500	2	26	35	225	6"	798	36.8
10S-03/2500	3	37	50	225	6"	952	42.9
10S-04/2500	4	55	75	225	6"	1106	49.1
10S-05/2500	5	63	85	225	6"	1260	55.2
10S-06/2500	6	63	85	225	6"	1414	61.3
10S-07/2500	7	93	125	225	6"	1568	67.5
10S-08/2500	8	93	125	225	6"	1722	73.6
10S-09/2500	9	110	150	225	6"	1876	79.8
10S-10/2500	10	93	175	225	6"	2030	85.9
10S-11/2500	11	132	175	225	6"	2184	92.0
10S-12/2500	12	150	200	225	6"	2338	98.2
10S-13/2500	13	170	225	225	6"	2492	104.3
10S-14/2500	14	150	200	225	6"	2646	110.5
10S-15/2500	15	150	200	225	6"	2800	116.6

PUMP MODEL	No. of Stages	MOTOR (Kw)	lps	0	22.22	27.78	30.56	33.33	36.11	44.44	47.22	50.00	52.78
			m ³ /h	0	80	100	110	120	130	160	170	180	190
10S-12/250	1	13	TOTAL MANOMETRIC HEAD IN METERS - (COLUMN WATER)	32	27	26	25	24	23	21	20	18	17
10S-02/2500	2	26		64	54	51	50	48	46	41	39	36	33
10S-03/2500	3	37		97	82	77	74	72	70	62	59	55	50
10S-04/2500	4	55		129	109	102	99	96	93	82	78	73	66
10S-05/2500	5	63		161	136	128	124	120	116	103	98	91	83
10S-06/2500	6	63		193	163	154	149	144	139	123	117	109	100
10S-07/2500	7	93		225	190	179	174	168	162	144	137	127	116
10S-08/2500	8	93		258	218	205	198	192	186	164	156	146	133
10S-09/2500	9	110		290	245	230	223	216	209	185	176	164	149
10S-10/2500	10	9.3		322	272	256	248	240	232	205	195	182	166
10S-11/2500	11	132		354	299	282	273	264	255	226	215	200	183
10S-12/2500	12	150		386	326	307	298	288	278	246	234	218	199
10S-13/2500	13	170		419	354	333	322	312	302	267	254	237	216
10S-14/2500	14	150		451	381	358	347	336	325	287	273	255	232
10S-15/2500	15	150		483	408	384	372	360	348	308	293	273	249