

MMB

Morsbach Maschinenbau GmbH.

MMB 4" SUBMERSIBLE PUMP 4S /130 MODELS CATALOGUE



STAINLESS STEEL SUBMERSIBLE PUMPS


Nominal Diameter: **4"**

Nominal Flow: **8m³/h**

Outlet Size: **2"**

Flow Range: **6-10m³/h**

Performance Curves: From 5 to 73 Stages

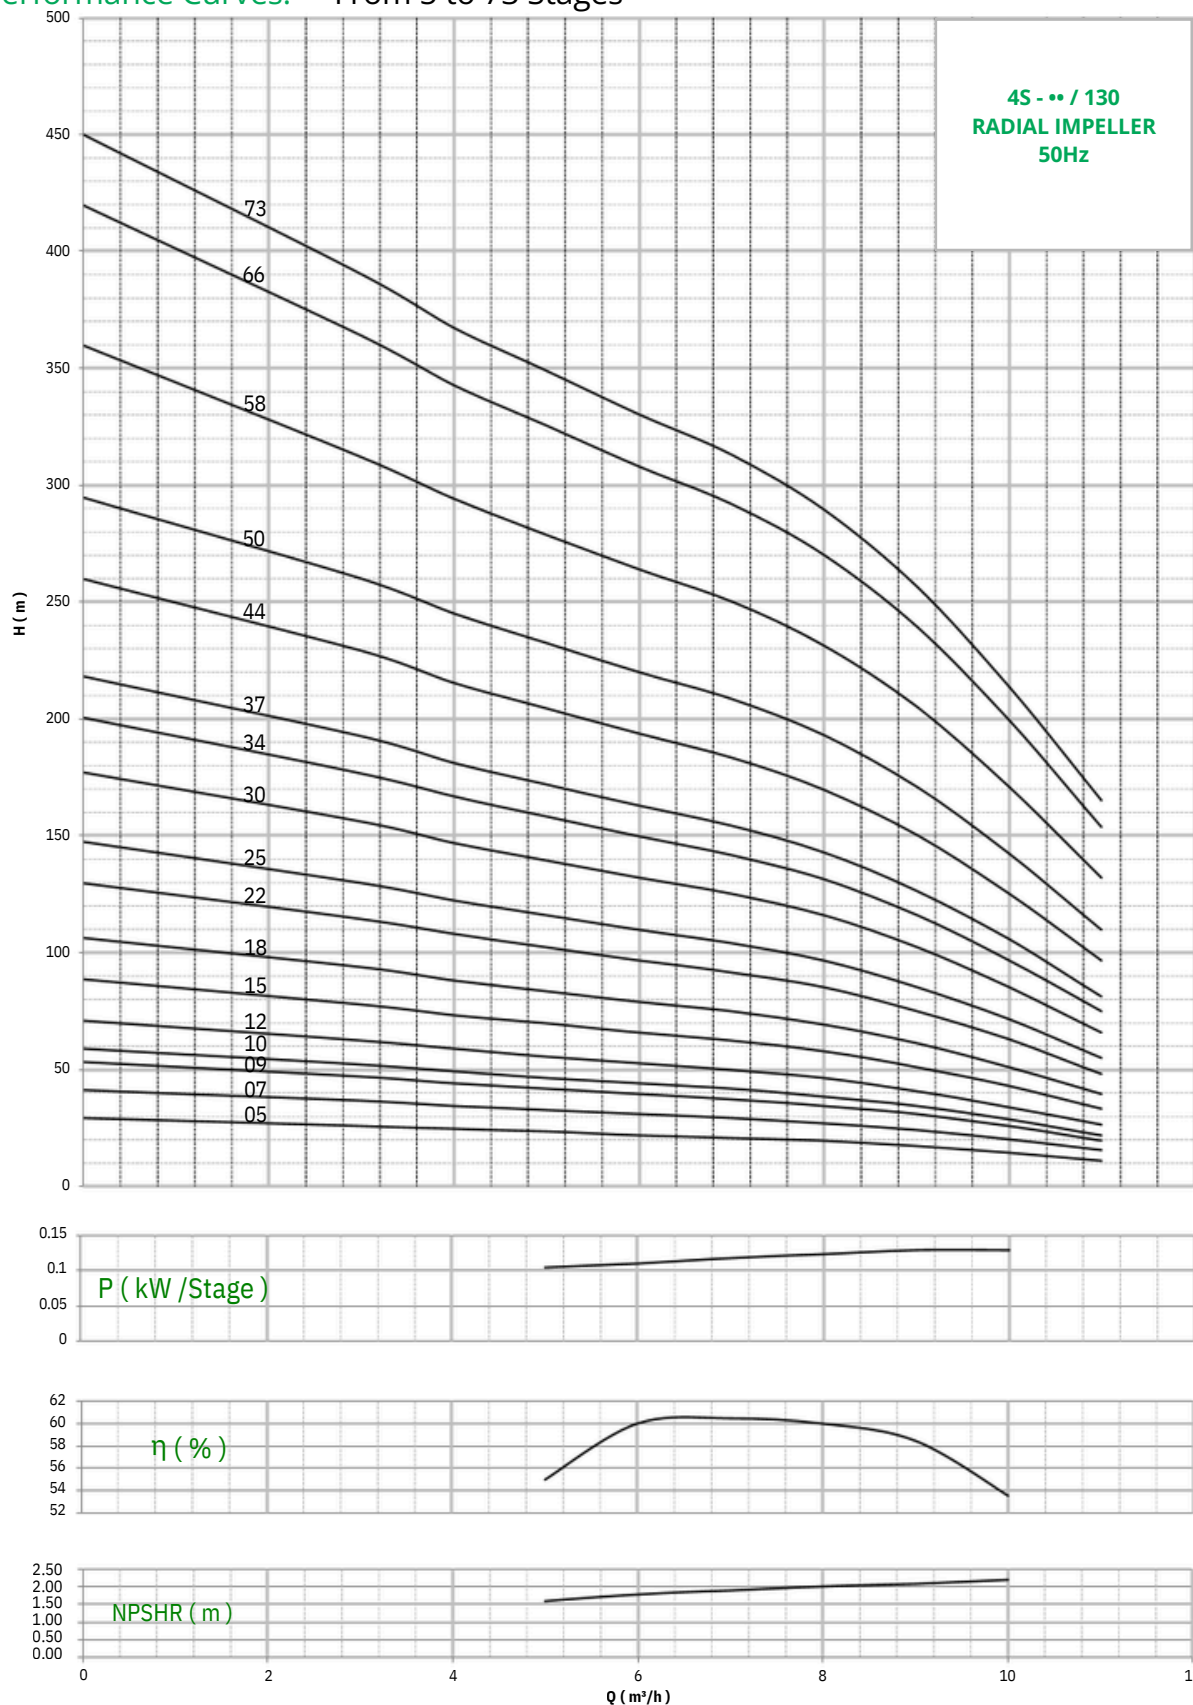

Refer General Information for performance curve conditions and for other details. Curves tolerance according to ISO : 9906, Annex - A

Morsbach Maschinenbau GmbH
Zur Hardt 6, 51597 Morsbach-Überholz, Germany
Tel: +49 2294 599 | Fax: +49 2294 6121

STAINLESS STEEL SUBMERSIBLE PUMPS

Nominal Diameter: **4"**


Nominal Flow: **8m³/h**

Outlet Size: **2"**

Flow Range: **6-10m³/h**

Performance Curves : From 5 to 73 Stages

DIMENSIONS & WEIGHT

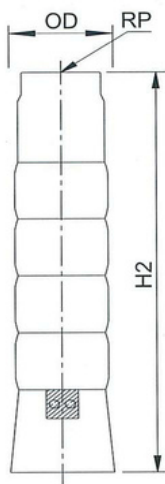

PUMP MODEL	No. of Stages	REQUIRED MOTOR POWER		APPROX. DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
		Kw	HP	#OD	RP	H2	
4S-05/130	5	0.75	1	97	50	410	4.5
4S-08/130	7	1.1	1.5	97	50	482	5.2
4S-09/130	9	1.5	2	97	50	554	5.9
4S-10/130	10	1.5	2	97	50	590	6.3
4S-12/130	12	2.2	3	97	50	662	7.3
4S-15/130	15	2.2	3	97	50	770	8.5
4S-18/130	18	3	4	97	50	878	9.9
4S-22/130	22	4	5.5	97	50	1022	11.6
4S-25/130	25	4	5.5	97	50	1152	12.9
4S-30/130	30	5.5	7.5	97	50	1332	14.9
4S-34/130	34	5.5	7.5	97	50	1476	17.2
4S-37/130	37	5.5	7.5	97	50	1606	18.7
4S-44/130	44	7.5	10	97	50	1860	22.2
4S-50/130	50	7.5	10	97	50	2076	25.2
4S-58/130	58	9.3	12.5	97	50	2390	30.5
4S-66/130	66	11	15	97	50	2678	34.7
4S-73/130	73	11	15	97	50	2954	38.6

PUMP MODEL	No. of Stages	MOTOR (Kw)	lps	0	0.83	1.11	1.39	1.67	1.94	2.22	2.50	2.78	3.06
			m³/h	0	3	4	5	6	7	8	9	10	11
4S-05/130	5	0.75	TOTAL MANOMETRIC HEAD IN METERS - (COLUMN WATER)	30	26	25	23	22	21	19	17	14	11
4S-08/130	7	1.1		41	36	34	33	31	29	27	24	20	15
4S-09/130	9	1.5		53	47	44	42	40	38	35	31	26	20
4S-10/130	10	1.5		59	52	49	47	44	42	39	34	29	22
4S-12/130	12	2.2		71	62	59	56	53	50	46	41	34	26
4S-15/130	15	2.2		89	78	74	70	66	63	58	51	43	33
4S-18/130	18	3		106	94	88	84	79	75	69	62	51	40
4S-22/130	22	4		130	114	108	102	97	92	85	75	63	48
4S-25/130	25	4		148	130	123	116	110	104	97	86	71	55
4S-30/130	30	26		177	156	147	140	132	125	116	103	86	66
4S-34/130	34	5.5		201	177	167	158	150	142	131	116	97	75
4S-37/130	37	5.5		218	192	181	172	163	154	143	127	105	81
4S-44/130	44	7.5		260	229	216	205	194	183	170	150	125	97
4S-50/130	50	7.5		295	260	245	233	220	209	193	171	143	110
4S-58/130	58	9.3		342	302	284	270	255	242	224	198	165	128
4S-66/130	66	11		389	343	323	307	290	275	255	226	188	145
4S-73/130	73	11		431	380	358	339	321	304	282	250	208	161