

MMB

Morsbach Maschinenbau GmbH.

MMB 4" SUBMERSIBLE PUMP 4S /30 MODELS CATALOGUE



STAINLESS STEEL SUBMERSIBLE PUMPS


Nominal Diameter: **4"**

Nominal Flow: **2m³/h**

Outlet Size: **1.25"**

Flow Range: **1.4-2.2m³/h**

Performance Curves: From 06 to 90 Stages

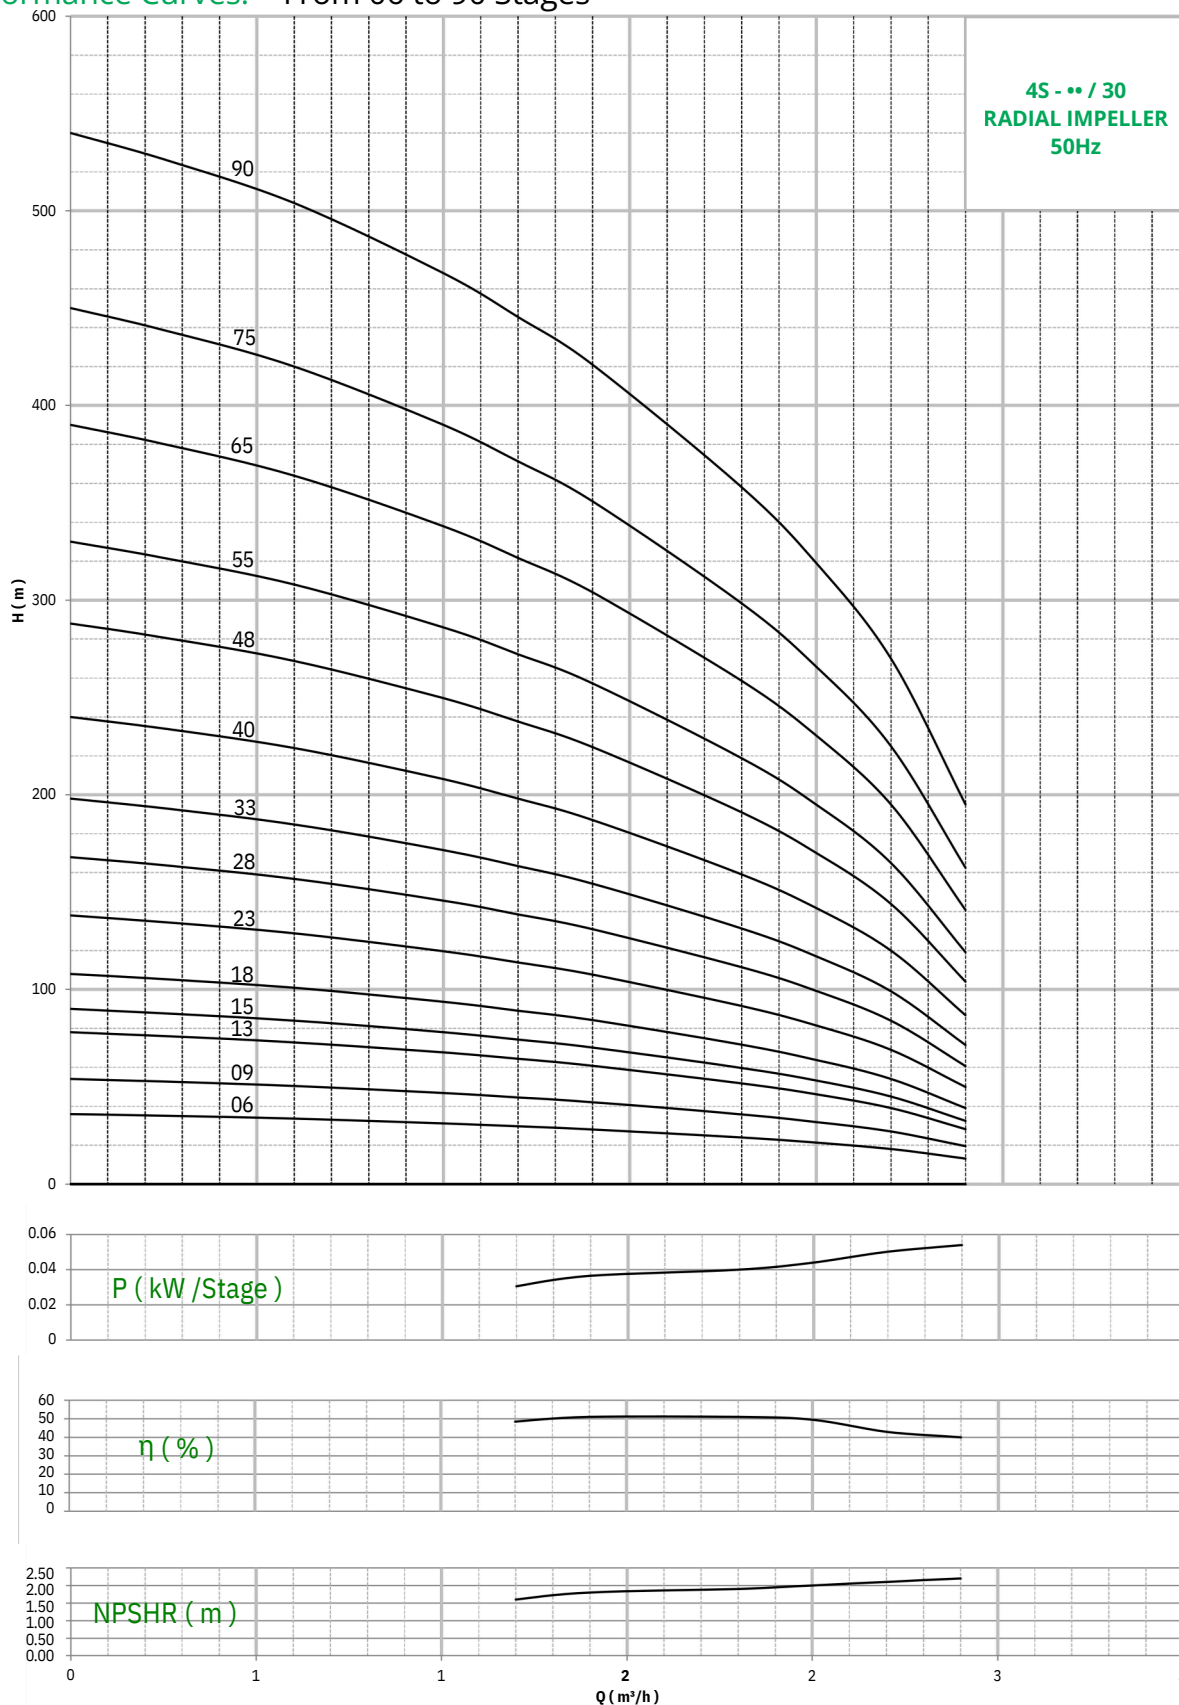

Refer General Information for performance curve conditions and for other details. Curves tolerance according to ISO : 9906, Annex - A

Morsbach Maschinenbau GmbH
Zur Hardt 6, 51597 Morsbach-Überholz, Germany
Tel: +49 2294 599 | Fax: +49 2294 6121

STAINLESS STEEL SUBMERSIBLE PUMPS

Nominal Diameter: **4"**


Nominal Flow: **2m³/h**

Outlet Size: **1.25"**

Flow Range: **1.4-2.2m³/h**

Performance Curves : From 6 to 90 Stages

DIMENSIONS & WEIGHT

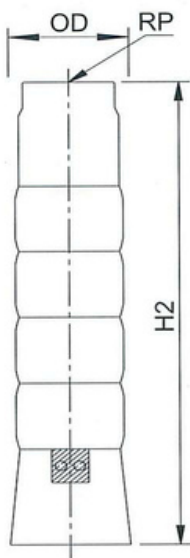

PUMP MODEL	No. of Stages	REQUIRED MOTOR POWER		APPROX. DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
		Kw	HP	#OD	RP	H2	
4S-06/30	6	0.37	0.5	97	32	292	2.8
4S-09/30	9	0.37	0.5	97	32	357	3.3
4S-13/30	13	0.55	0.75	97	32	445	4.5
4S-15/30	15	0.55	0.75	97	32	489	5.1
4S-18/30	18	0.75	0.75	97	32	554	5.7
4S-23/30	23	1.1	1	97	32	665	7.1
4S-28/30	28	1.5	1.5	97	32	775	8.2
4S-33/30	33	1.5	2	97	32	1022	12.0
4S-40/30	40	2.2	2	97	32	1214	14.3
4S-48/30	48	2.2	3	97	32	1382	16.9
4S-55/30	55	3	4	97	32	1550	19.7
4S-65/30	65	3	4	97	32	1838	22.1
4S-75/30	75	4	5.5	97	32	2078	25.8
4S-90/30	90	4	5.5	97	32	2438	30.0

PUMP MODEL	No. of Stages	MOTOR (Kw)	lps	0	0.07	0.17	0.28	0.33	0.39	0.50	0.56	0.61	0.67
			m ³ /h	0.00	0.25	0.60	1.00	1.20	1.40	1.80	2.00	2.20	2.40
4S-06/30	6	0.37	TOTAL MANOMETRIC HEAD IN METERS - (COLUMN WATER)	36	35	34	31	30	28	24	21	18	13
4S-09/30	9	0.37		54	53	50	47	45	42	36	32	27	19
4S-13/30	13	0.55		78	76	73	68	64	61	52	46	39	28
4S-15/30	15	0.55		90	88	84	78	74	70	60	53	45	32
4S-18/30	18	0.75		108	105	101	94	89	84	72	64	54	39
4S-23/30	23	1.1		138	135	129	120	114	108	91	82	69	50
4S-28/30	28	1.5		168	164	157	146	139	131	111	99	84	61
4S-33/30	33	1.5		198	193	185	172	163	154	131	117	99	71
4S-40/30	40	2.2		240	234	224	208	198	187	159	142	120	87
4S-48/30	48	2.2		288	281	269	250	238	224	191	170	144	104
4S-55/30	55	3		330	322	308	286	272	257	219	195	165	119
4S-65/30	65	3		390	380	364	338	322	304	259	230	195	141
4S-75/30	75	4		450	439	420	390	371	351	298	266	225	162
4S-90/30	90	4		540	527	504	468	446	421	358	319	270	195