

MMB

Morsbach Maschinenbau GmbH.

MMB 4" SUBMERSIBLE PUMP 4S /50 MODELS CATALOGUE



STAINLESS STEEL SUBMERSIBLE PUMPS


Nominal Diameter: **4"**

Nominal Flow: **3m³/h**

Outlet Size: **1.25"**

Flow Range: **2-4m³/h**

Performance Curves: From 6 to 75 Stages

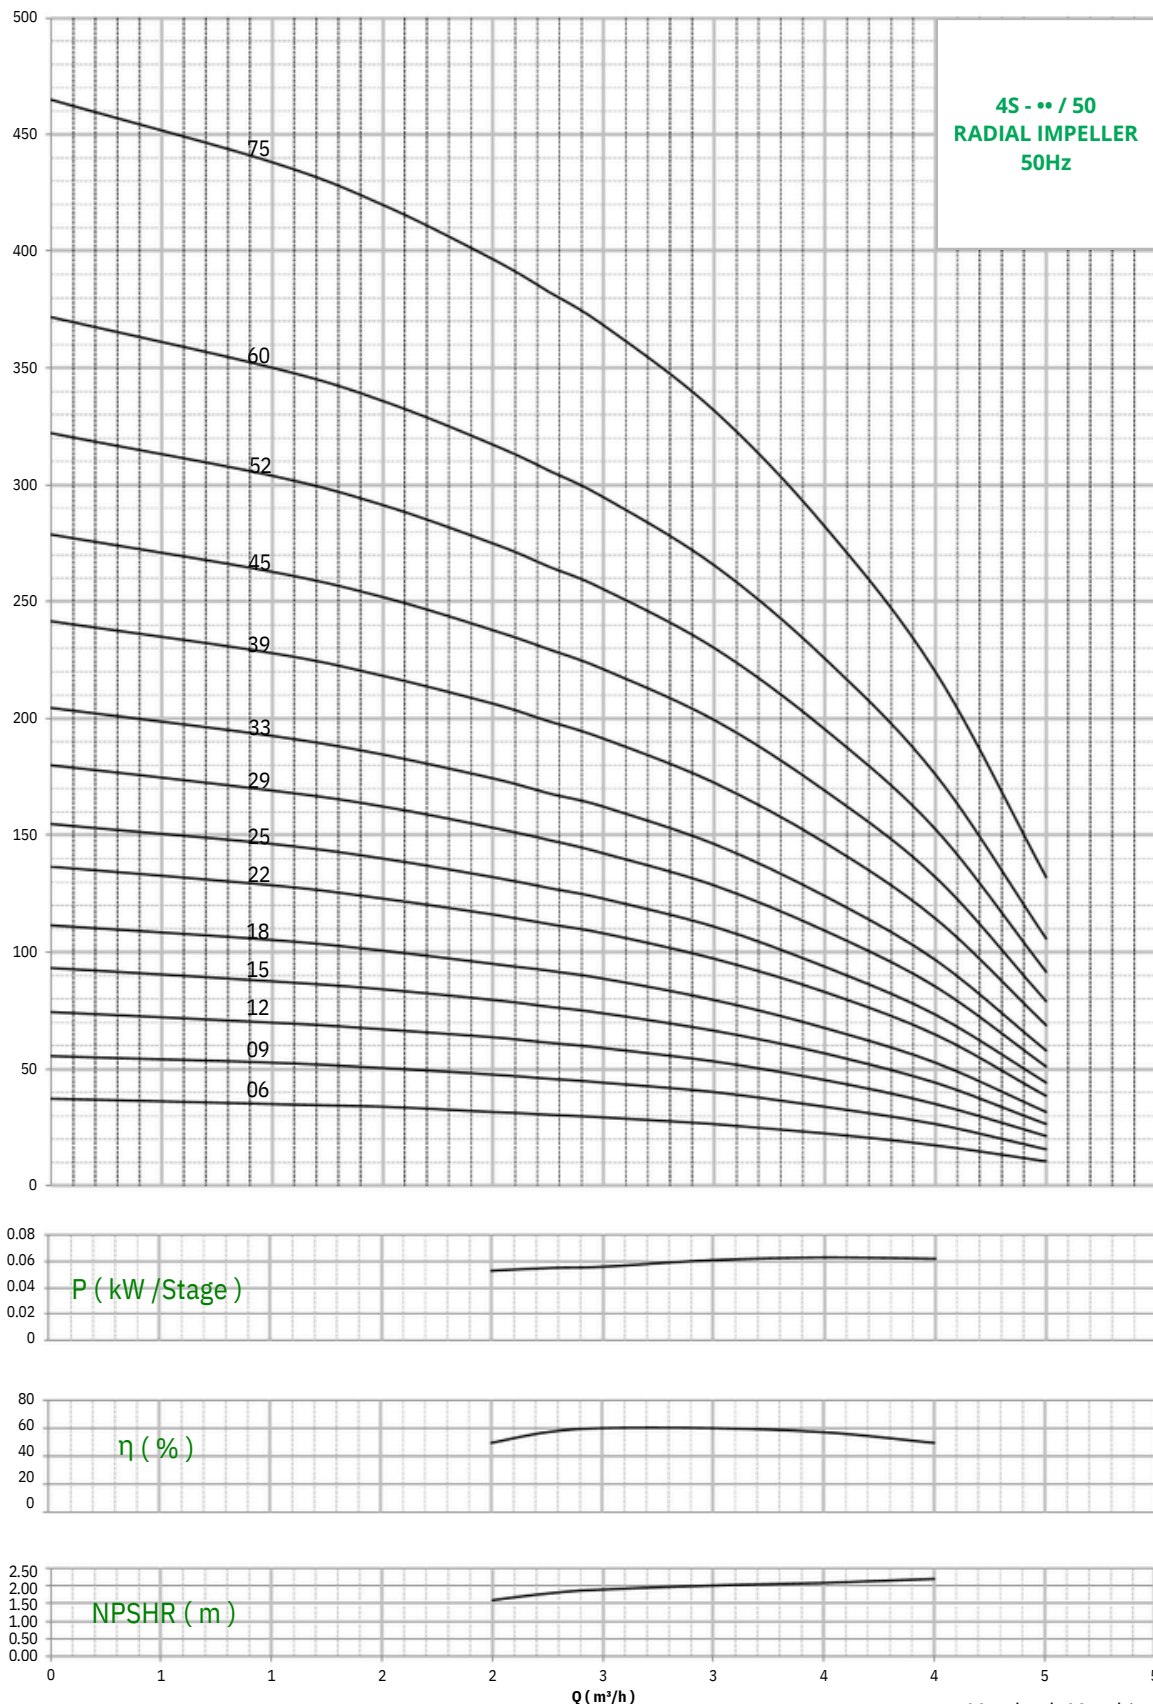

Refer General Information for performance curve conditions and for other details. Curves tolerance according to ISO : 9906, Annex - A

Morsbach Maschinenbau GmbH
Zur Hardt 6, 51597 Morsbach-Überholz, Germany
Tel: +49 2294 599 | Fax: +49 2294 6121

STAINLESS STEEL SUBMERSIBLE PUMPS

Nominal Diameter: **4"**


Nominal Flow: **3m³/h**

Outlet Size: **1.25"**

Flow Range: **2-4m³/h**

Performance Curves : From 6 to 75 Stages

DIMENSIONS & WEIGHT

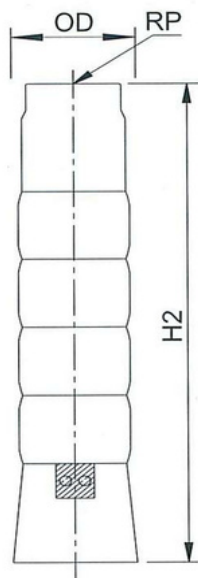

PUMP MODEL	No. of Stages	REQUIRED MOTOR POWER		APPROX. DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
		Kw	HP	#OD	RP	H2	
4S-06/50	6	0.37	0.5	97	65-80	291	2.9
4S-09/50	9	0.55	0.75	97	65-80	357	3.4
4S-12/50	12	0.75	1	97	65-80	423	4.3
4S-15/50	15	1.1	1.5	97	65-80	489	5.3
4S-18/50	18	1.1	1.5	97	65-80	555	6.1
4S-22/50	22	1.5	2	97	65-80	643	7.0
4S-25/50	25	1.5	2	97	65-80	709	7.8
4S-29/50	29	2.2	3	97	65-80	797	8.4
4S-33/50	33	2.2	3	97	65-80	1022	12.1
4S-39/50	39	3	4	97	65-80	1166	14.1
4S-45/50	45	3	4	97	65-80	1334	16.3
4S-52/50	52	4	5.5	97	65-80	1502	18.1
4S-60/50	60	4	5.5	97	65-80	1718	20.9
4S-75/50	75	5.5	7.5	97	65-80	2148	26.1

PUMP MODEL	No. of Stages	MOTOR (Kw)	lps	0	0.28	0.42	0.56	0.63	0.69	0.83	0.97	1.11	1.25
			m ³ /h	0	1	1.5	2	2.25	2.5	3	3.5	4	4.5
4S-06/50	6	0.37	TOTAL MANOMETRIC HEAD IN METERS - (COLUMN WATER)	37	35	34	32	31	29	27	23	18	11
4S-09/50	9	0.55		56	53	50	48	46	44	40	34	26	16
4S-12/50	12	0.75		74	70	67	63	61	59	53	45	35	21
4S-15/50	15	1.1		93	88	84	79	76	74	66	56	44	26
4S-18/50	18	1.1		112	105	101	95	92	88	80	68	53	32
4S-22/50	22	1.5		136	128	123	116	112	108	97	83	64	39
4S-25/50	25	1.5		155	146	140	132	127	123	111	94	73	44
4S-29/50	29	2.2		180	169	162	153	148	142	128	109	85	51
4S-33/50	33	2.2		205	193	185	174	168	162	146	124	97	58
4S-39/50	39	2.6		242	228	218	206	199	191	173	147	114	69
4S-45/50	45	3		279	263	252	238	229	221	199	169	132	79
4S-52/50	52	4		322	304	291	275	265	255	230	196	152	92
4S-60/50	60	4		372	350	336	317	306	295	266	226	176	106
4S-75/50	75	5.5		465	438	420	396	382	368	332	282	220	132