

MMB

Morsbach Maschinenbau GmbH.

MMB 4" SUBMERSIBLE PUMP 4S /85 MODELS CATALOGUE



STAINLESS STEEL SUBMERSIBLE PUMPS


Nominal Diameter: **4"**

Nominal Flow: **5m³/h**

Outlet Size: **1.5"**

Flow Range: **3.5-6.5m³/h**

Performance Curves: From 4 to 75 Stages

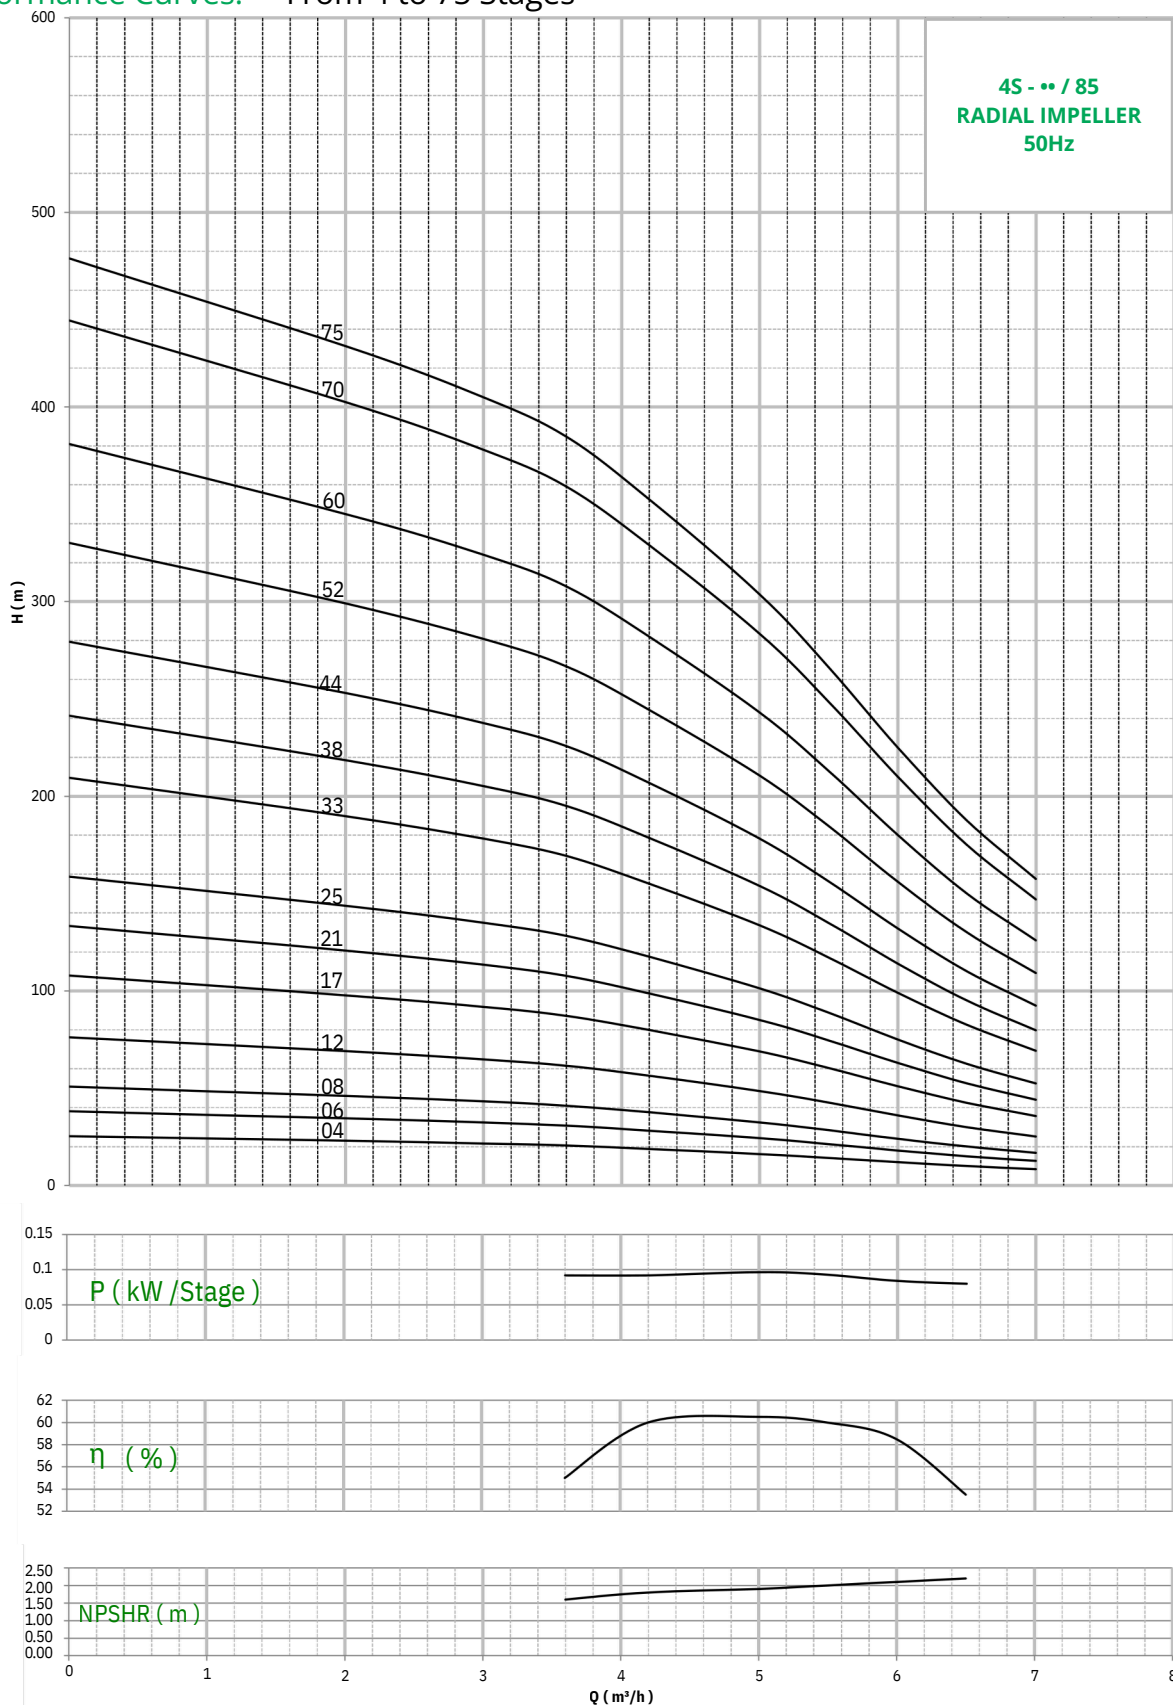

Refer General Information for performance curve conditions and for other details. Curves tolerance according to ISO : 9906, Annex - A

Morsbach Maschinenbau GmbH
Zur Hardt 6, 51597 Morsbach-Überholz, Germany
Tel: +49 2294 599 | Fax: +49 2294 6121

STAINLESS STEEL SUBMERSIBLE PUMPS

Nominal Diameter: **4"**


Nominal Flow: **5m³/h**

Outlet Size: **1.5"**

Flow Range: **3.5-6.5m³/h**

Performance Curves : From 4 to 75 Stages

DIMENSIONS & WEIGHT

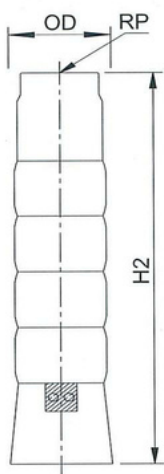

PUMP MO DEL	No. of Stages	REQUIRED MOTOR POWER		APPROX. DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
		Kw	HP	#OD	RP	H2	
4S-04/85	4	0.37	0.5	97	1.5"	255	2.4
4S-06/85	6	0.55	0.75	97	1.5"	303	3.0
4S-08/85	8	0.75	1	97	1.5"	351	3.6
4S-12/85	12	1.5	2	97	1.5"	447	4.6
4S-17/85	17	1.5	2	97	1.5"	567	5.9
4S-21/85	21	2.2	3	97	1.5"	663	6.8
4S-25/85	25	2.2	3	97	1.5"	759	8.0
4S-33/85	33	3	4	97	1.5"	1022	12.1
4S-38/85	38	4	5.5	97	1.5"	1142	13.4
4S-44/85	44	4	5.5	97	1.5"	1310	16.0
4S-52/85	52	3	4	97	1.5"	1502	18.4
4S-52/85	60	4	5.5	97	1.5"	1718	20.8
4S-70/85	70	4	5.5	97	1.5"	1939	25.0
4S-75/85	75	5.5	7.5	97	1.5"	2078	26.8

PUMP MODEL	No. of Stages	MOTOR (Kw)	lps	0	0.56	0.83	1.00	1.17	1.39	1.53	1.67	1.81	1.94
				m ³ /h	2	3	3.6	4.2	5	5.5	6	6.5	7
4S-04/85	4	0.37	TOTAL MANOMETRIC HEAD IN METERS - (COLUMN WATER)	25	23	22	21	19	16	14	12	10	8
4S-06/85	6	0.55		38	35	32	31	28	24	21	18	15	13
4S-08/85	8	0.75		51	46	43	41	38	32	28	24	20	17
4S-12/85	12	1.5		76	69	65	62	56	49	43	36	30	25
4S-17/85	17	1.5		108	98	92	87	80	69	60	51	43	36
4S-21/85	21	2.2		133	121	113	108	99	85	75	63	53	44
4S-25/85	25	2.2		159	144	135	128	118	101	89	75	63	53
4S-33/85	33	3		210	190	178	169	155	134	117	99	83	69
4S-38/85	38	4		241	219	205	195	179	154	135	114	95	80
4S-44/85	44	26		279	253	238	226	207	178	156	132	110	92
4S-52/85	52	3		330	299	281	267	244	211	185	156	130	109
4S-52/85	60	4		381	345	324	308	282	243	213	180	150	126
4S-70/85	70	4		445	403	378	359	329	284	249	210	175	147
4S-75/85	75	5.5		476	431	405	385	353	304	266	225	188	158