

MMB

Morsbach Maschinenbau GmbH.

MMB 6" SUBMERSIBLE PUMP 6S /300 MODELS CATALOGUE



STAINLESS STEEL SUBMERSIBLE PUMPS


Nominal Diameter: **6"**

Nominal Flow: **18m³/h**

Outlet Size: **2.5" - 3"**

Flow Range: **8-22m³/h**

Performance Curves: From 10 to 33 Stages

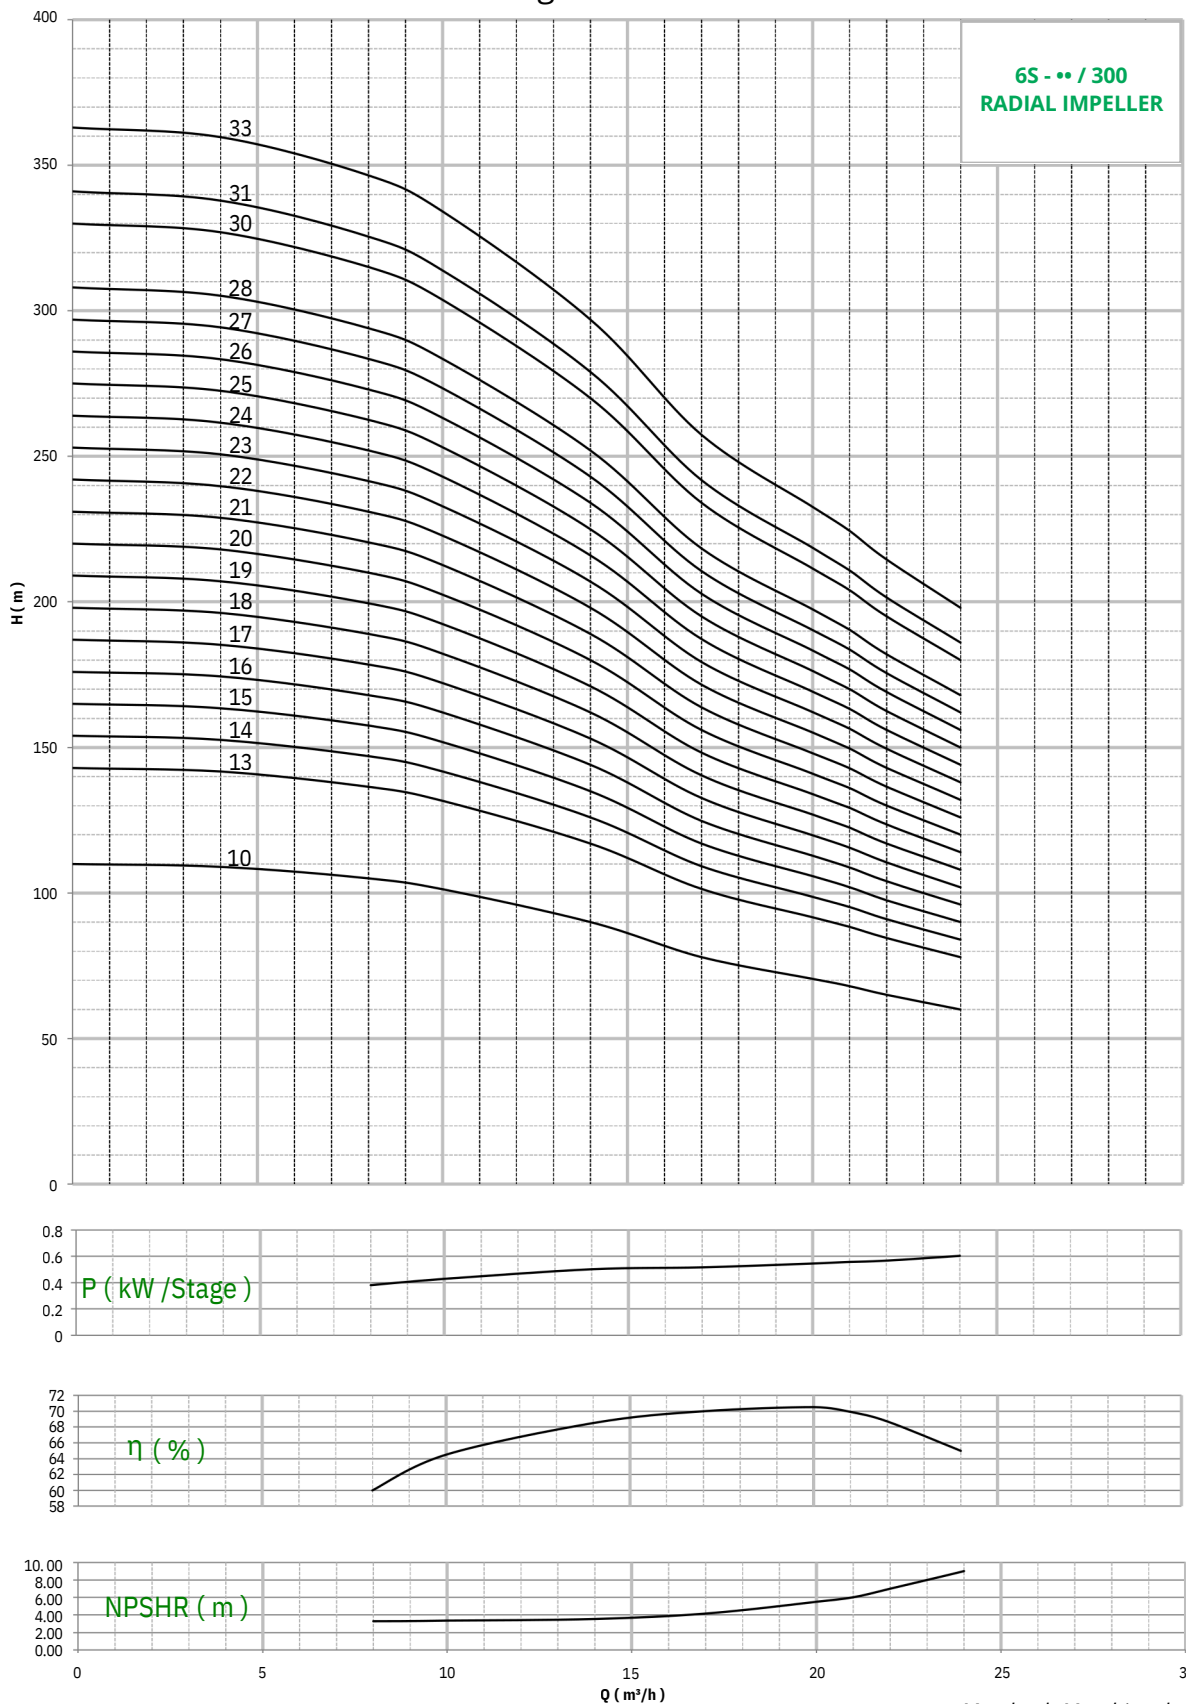

Refer General Information for performance curve conditions and for other details. Curves tolerance according to ISO : 9906, Annex - A

Morsbach Maschinenbau GmbH
Zur Hardt 6, 51597 Morsbach-Überholz, Germany
Tel: +49 2294 599 | Fax: +49 2294 6121

STAINLESS STEEL SUBMERSIBLE PUMPS

Nominal Diameter: **6"**


Nominal Flow: **18m³/h**

Outlet Size: **2.5"- 3"**

Flow Range: **8-22m³/h**

Performance Curves : From 10 to 33 Stages

DIMENSIONS & WEIGHT

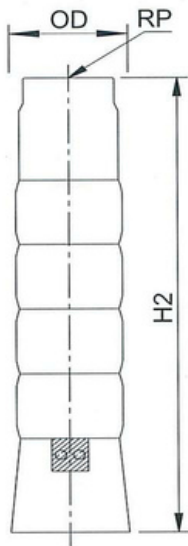

PUMP MODEL	No. of Stages	REQUIRED MOTOR POWER		DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
		Kw	HP	#OD	RP	H2	
6S-10/300	10	5.5	7.5	133	65-80	705	12
6S-13/300	13	7.5	10	133	65-80	888	15
6S-14/300	14	9.3	12.5	133	65-80	949	16
6S-15/300	15	9.3	12.5	133	65-80	1010	17
6S-16/300	16	9.3	12.5	133	65-80	1071	18
6S-17/300	17	9.3	12.5	133	65-80	1132	19
6S-18/300	18	11	15	133	65-80	1193	20
6S-19/300	19	11	15	133	65-80	1254	21
6S-20/300	20	11	15	133	65-80	1315	22
6S-21/300	21	13	17.5	133	65-80	1376	23
6S-22/300	22	13	17.5	133	65-80	1437	24
6S-23/300	23	13	17.5	133	65-80	1498	25
6S-24/300	24	15	20	133	65-80	1559	26
6S-25/300	25	15	20	133	65-80	1620	27
6S-26/300	26	15	20	133	65-80	1681	28
6S-27/300	27	15	20	133	65-80	1742	29
6S-28/300	28	18.5	25	133	65-80	1803	30
6S-30/300	30	18.5	25	133	65-80	1925	32
6S-31/300	31	18.5	25	133	65-80	1986	33
6S-33/300	33	18.5	25	133	65-80	2108	35

PUMP MODEL	No. of Stages	MOTOR (Kw)	lps	0	1.11	2.22	2.78	3.89	4.72	5.56	5.83	6.11	6.67
			m ³ /h	0	4	8	10	14	17	20	21	22	24
6S-10/300	10	5.5	TOTAL MANOMETRIC HEAD IN METERS - (COLUMN WATER)	110	109	105	101	90	78	71	68	65	60
6S-13/300	13	7.5		143	142	137	132	117	101	92	88	85	78
6S-14/300	14	9.3		154	153	147	142	126	109	99	95	91	84
6S-15/300	15	9.3		165	164	158	152	135	117	106	102	98	90
6S-16/300	16	9.3		176	174	168	162	144	125	113	109	104	96
6S-17/300	17	9.3		187	185	179	172	153	133	120	116	111	102
6S-18/300	18	11		198	196	189	182	162	140	127	122	117	108
6S-19/300	19	11		209	207	200	192	171	148	134	129	124	114
6S-20/300	20	11		220	218	210	203	180	156	141	136	130	120
6S-21/300	21	13		231	229	221	213	189	164	148	143	137	126
6S-22/300	22	13		242	240	231	223	198	172	155	150	143	132
6S-23/300	23	13		253	251	242	233	207	179	162	156	150	138
6S-24/300	24	15		264	262	252	243	216	187	169	163	156	144
6S-25/300	25	15		275	273	263	253	225	195	176	170	163	150
6S-26/300	26	15		286	283	273	263	234	203	183	177	169	156
6S-27/300	27	15		297	294	284	273	243	211	190	184	176	162
6S-28/300	28	18.5		308	305	294	284	252	218	197	190	182	168
6S-30/300	30	18.5		330	327	315	304	270	234	212	204	195	180
6S-31/300	31	18.5		341	338	326	314	279	242	219	211	202	186
6S-33/300	33	18.5		363	360	347	334	297	257	233	224	215	198

STAINLESS STEEL SUBMERSIBLE PUMPS


Nominal Diameter: **6"**

Nominal Flow: **20m³/h**

Outlet Size: **2.5" - 3"**

Flow Range: **8-22m³/h**

Performance Curves: From 35 to 75 Stages

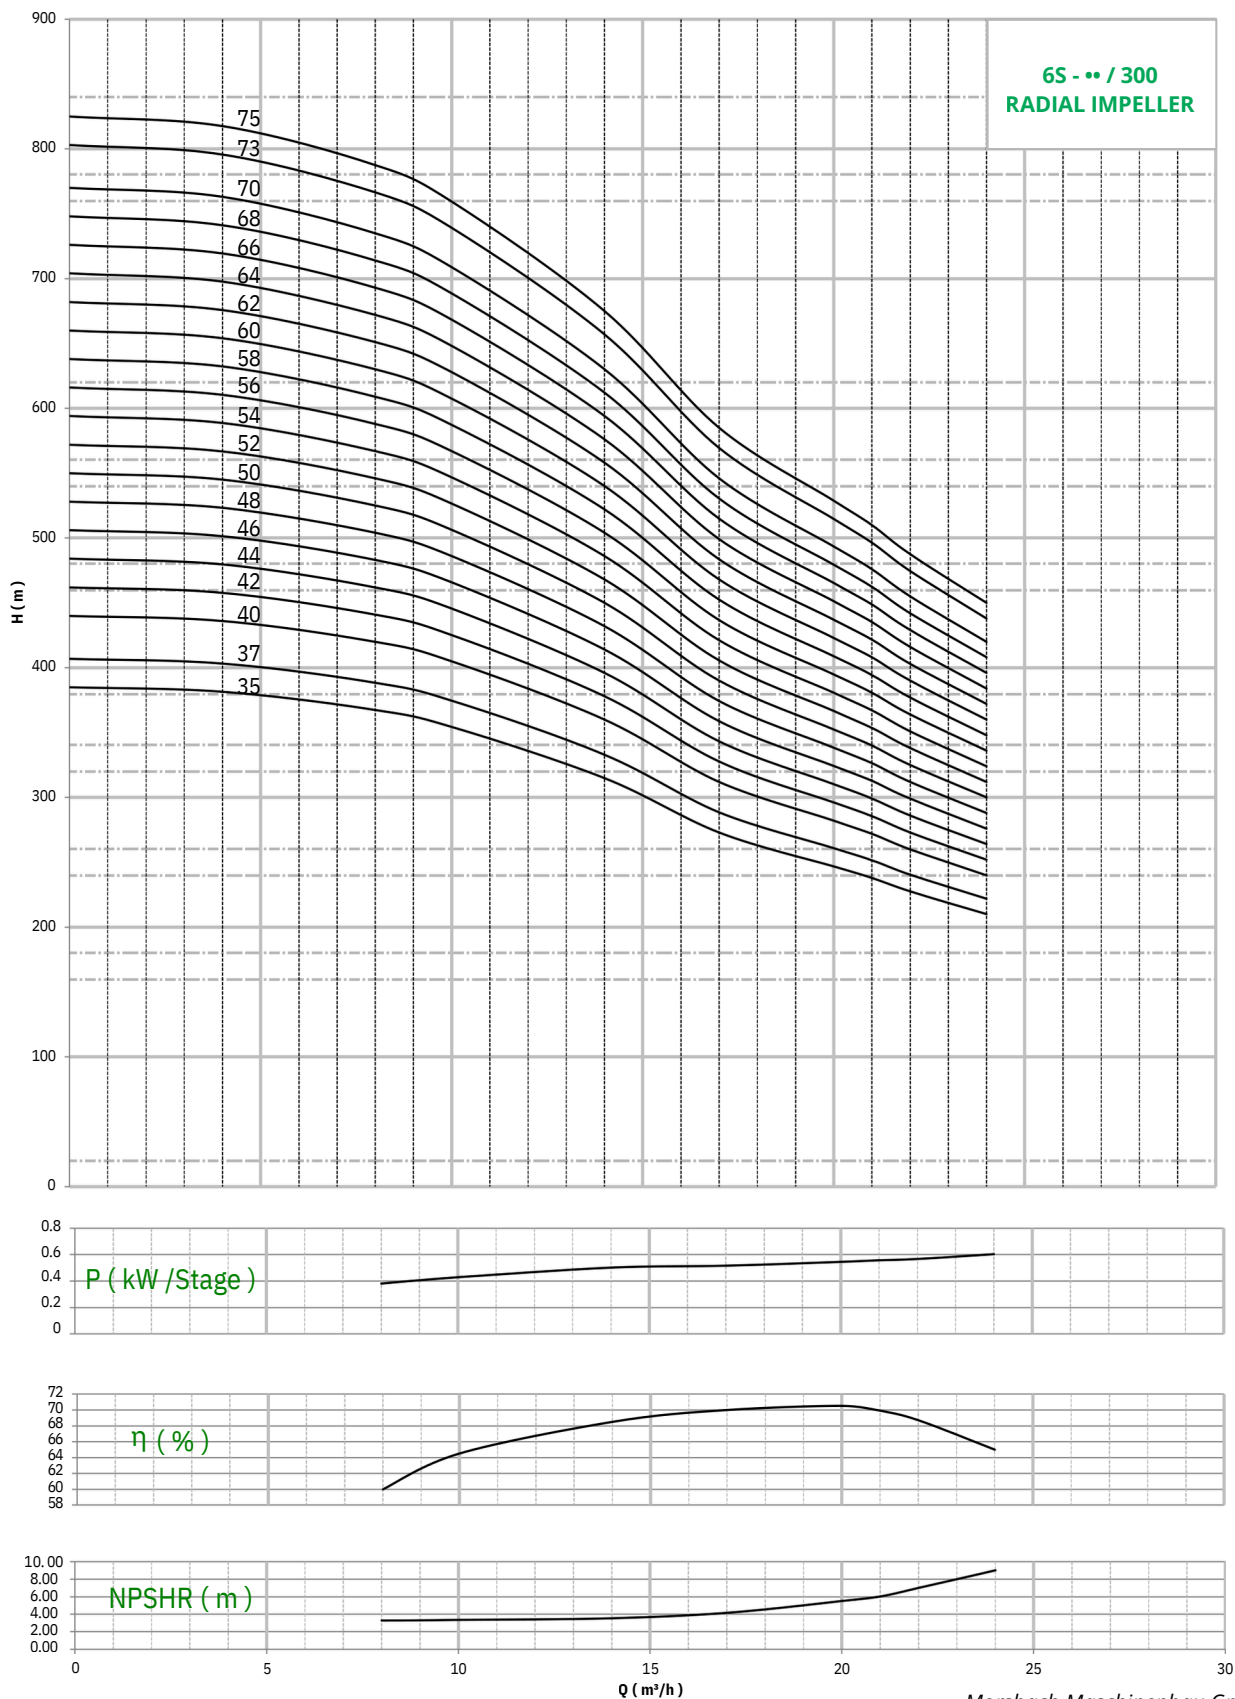

Refer General Information for performance curve conditions and for other details. Curves tolerance according to ISO : 9906, Annex - A

Morsbach Maschinenbau GmbH
Zur Hardt 6, 51597 Morsbach-Überholz, Germany
Tel: +49 2294 599 | Fax: +49 2294 6121

STAINLESS STEEL SUBMERSIBLE PUMPS

Nominal Diameter: **6"**


Nominal Flow: **18m³/h**

Outlet Size: **2.5"- 3"**

Flow Range: **8-22m³/h**

Performance Curves : From 35 to 75 Stages

DIMENSIONS & WEIGHT

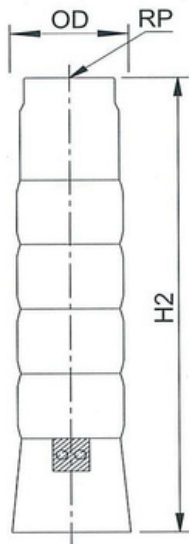

PUMP MODEL	No. of Stages	REQUIRED MOTOR POWER		DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
		Kw	HP	#OD	RP	H2	
6S-35/300	35	22	30	133	65-80	2457.5	41.3
6S-37/300	37	22	30	133	65-80	2579.5	43.3
6S-40/300	40	22	30	133	65-80	2762.5	46.3
6S-42/300	42	26	35	133	65-80	2884.5	48.3
6S-44/300	44	26	35	133	65-80	3006.5	50.3
6S-46/300	46	30	40	133	65-80	3128.5	52.3
6S-48/300	48	30	40	133	65-80	3250.5	54.3
6S-50/300	50	30	40	133	65-80	3372.5	56.3
6S-52/300	52	37	50	133	65-80	3494.5	58.3
6S-54/300	54	37	50	133	65-80	3616.5	60.3
6S-56/300	56	37	50	133	65-80	3738.5	62.3
6S-58/300	58	37	50	133	65-80	3860.5	64.3
6S-60/300	60	37	50	133	65-80	3982.5	66.3
6S-62/300	62	45	60	133	65-80	4104.5	68.3
6S-64/300	64	45	60	133	65-80	4226.5	70.3
6S-66/300	66	45	60	133	65-80	4348.5	72.3
6S-68/300	68	45	60	133	65-80	4470.5	74.3
6S-70/300	70	45	60	133	65-80	4592.5	76.3
6S-73/300	73	45	60	133	65-80	4775.5	79.3
6S-75/300	75	45	60	133	65-80	4897.5	81.3

PUMP MODEL	No. of Stages	MOTOR (Kw)	lps	0	1.11	2.22	2.78	3.89	4.72	5.56	5.83	6.11	6.67
				m ³ /h	0	4	8	10	14	17	20	21	24
6S-35/300	35	22	TOTAL MANOMETRIC HEAD IN METERS - (COLUMN WATER)	385	382	368	354	315	273	247	238	228	210
6S-37/300	37	22		407	403	389	375	333	289	261	252	241	222
6S-40/300	39	22		429	425	410	395	351	304	275	265	254	234
6S-42/300	41	26		451	447	431	415	369	320	289	279	267	246
6S-44/300	43	26		473	469	452	435	387	335	303	292	280	258
6S-46/300	45	30		495	491	473	456	405	351	317	306	293	270
6S-48/300	47	30		517	512	494	476	423	367	331	320	306	282
6S-50/300	49	30		539	534	515	496	441	382	345	333	319	294
6S-52/300	51	37		561	556	536	516	459	398	360	347	332	306
6S-54/300	53	37		583	578	557	537	477	413	374	360	345	318
6S-56/300	55	37		605	600	578	557	495	429	388	374	358	330
6S-58/300	57	37		627	621	599	577	513	445	402	388	371	342
6S-60/300	59	37		649	643	620	597	531	460	416	401	384	354
6S-62/300	61	45		671	665	641	618	549	476	430	415	397	366
6S-64/300	63	45		693	687	662	638	567	491	444	428	410	378
6S-66/300	65	45		715	709	683	658	585	507	458	442	423	390
6S-68/300	67	45		737	730	704	678	603	523	472	456	436	402
6S-70/300	69	45		759	752	725	699	621	538	486	469	449	414
6S-73/300	72	45		792	785	756	729	648	562	508	490	468	432
6S-75/300	75	45		825	818	788	759	675	585	529	510	488	450