

MMB

Morsbach Maschinenbau GmbH.

MMB 6" SUBMERSIBLE PUMP 6S /350 MODELS CATALOGUE



STAINLESS STEEL SUBMERSIBLE PUMPS


Nominal Diameter: **6"**

Nominal Flow: **21m³/h**

Outlet Size: **2.5" - 3"**

Flow Range: **12-28m³/h**

Performance Curves: From 10 to 29 Stages

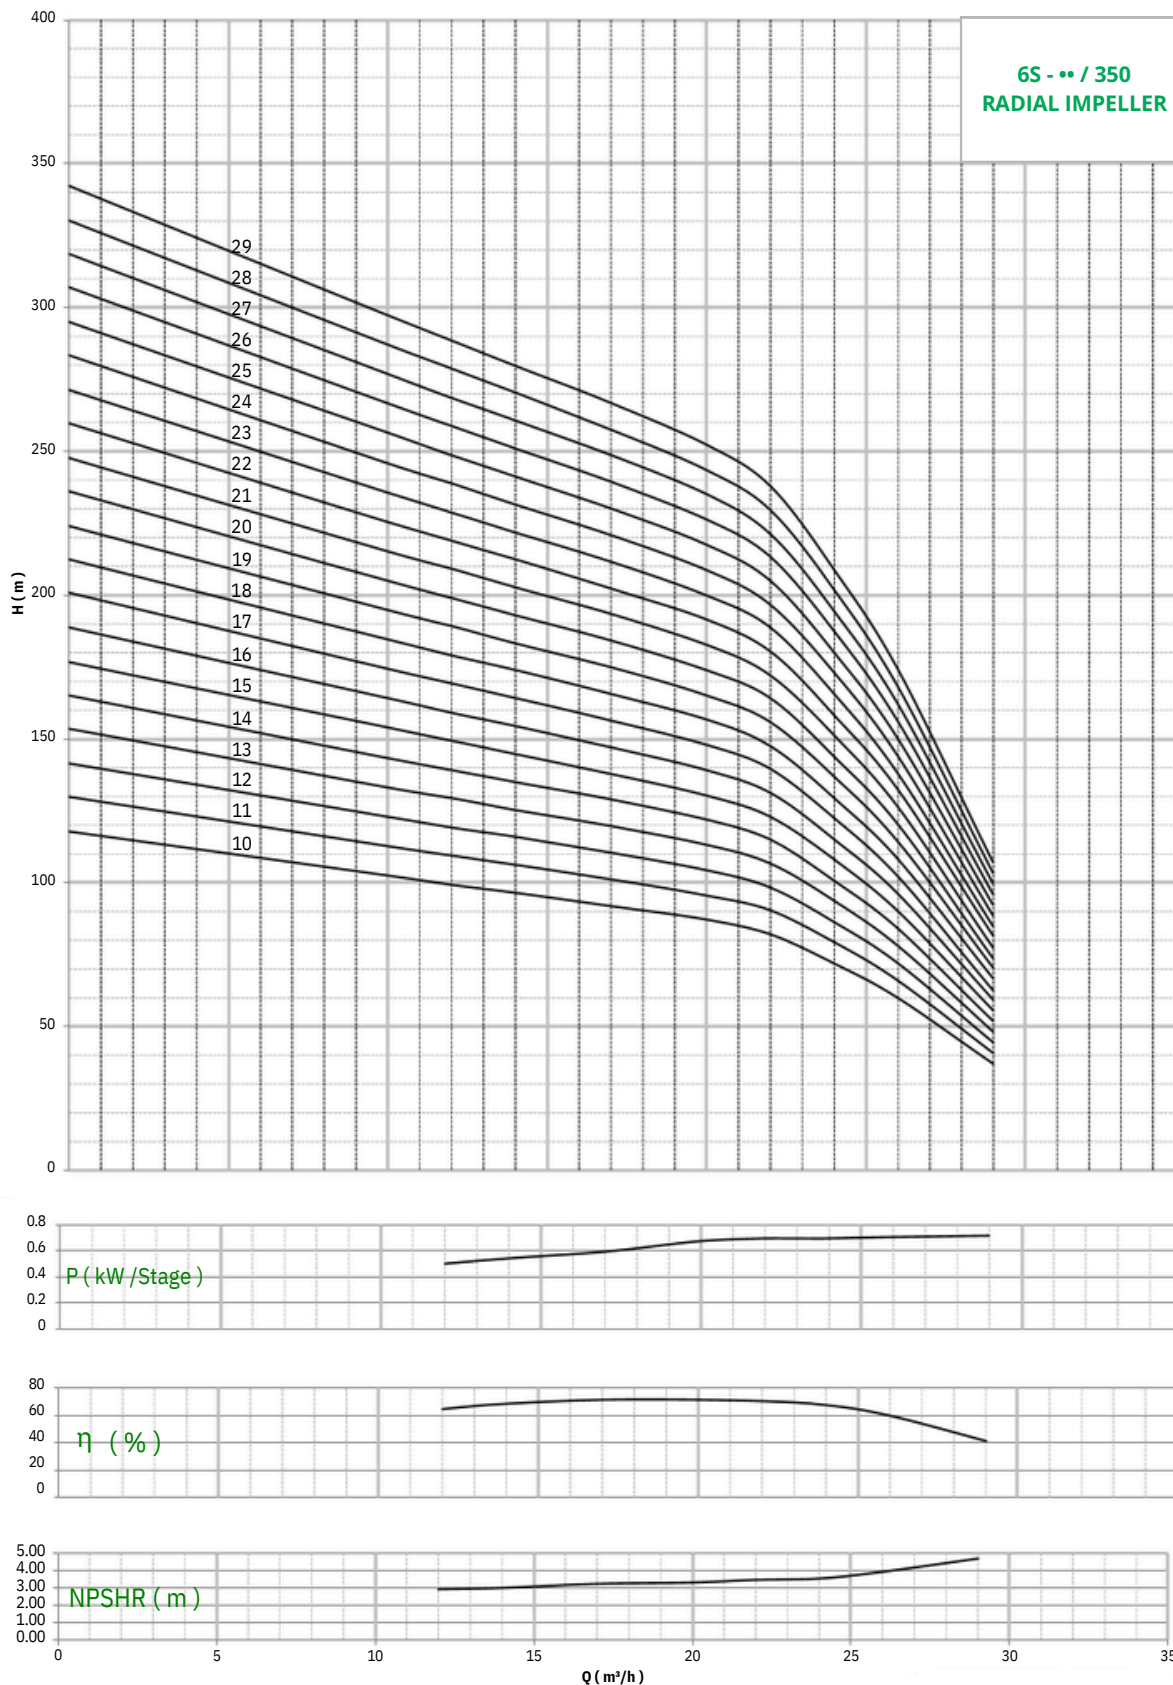

Refer General Information for performance curve conditions and for other details. Curves tolerance according to ISO : 9906, Annex - A

Morsbach Maschinenbau GmbH
Zur Hardt 6, 51597 Morsbach-Überholz, Germany
Tel: +49 2294 599 | Fax: +49 2294 6121

STAINLESS STEEL SUBMERSIBLE PUMPS

Nominal Diameter: **6"**


Nominal Flow: **21m³/h**

Outlet Size: **2.5"- 3"**

Flow Range: **12-28m³/h**

Performance Curves : From 10 to 29 Stages

DIMENSIONS & WEIGHT

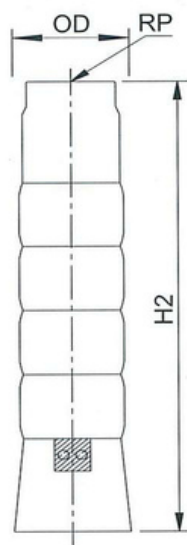

PUMP M ODEL	No. of Stages	REQUIRED MOTOR POWER		DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
		Kw	HP	#OD	RP	H2	
6S-10/350	10	7.5	10	133	80	816	10.4
6S-11/350	11	9.3	12.5	133	80	871	11.2
6S-12/350	12	9.3	12.5	133	80	926	12
6S-13/350	13	11	15	133	80	981	12.8
6S-14/350	14	11	15	133	80	1036	13.6
6S-15/350	15	11	15	133	80	1091	14.4
6S-16/350	16	13	17.5	133	80	1146	15.2
6S-17/350	17	13	17.5	133	80	1201	16
6S-18/350	18	13	17.5	133	80	1256	16.8
6S-19/350	19	9.3	12.5	133	80	1311	17.6
6S-20/350	20	15	20	133	80	1366	18.4
6S-21/350	21	15	20	133	80	1421	19.2
6S-22/350	22	18.5	25	133	80	1476	20
6S-23/350	23	18.5	25	133	80	1531	20.8
6S-24/350	24	18.5	25	133	80	1586	21.6
6S-25/350	25	18.5	25	133	80	1641	22.4
6S-26/350	26	22	30	133	80	1696	23.2
6S-27/350	27	22	30	133	80	1751	24
6S-28/350	28	22	30	133	80	1806	24.8
6S-29/350	29	22	30	133	65-80	1861	25.6

PUMP MODEL	No. of Stages	MOTOR (Kw)	lps	0	2.78	3.33	3.89	4.72	5.56	6.11	6.67	7.22	8.06
			m³/h	0	10	12	14	17	20	22	24	26	29
6S-10/350	10	7.5	TOTAL MANOMETRIC HEAD IN METERS - (COLUMN WATER)	118	103	100	97	92	87	82	72	60	37
6S-11/350	11	9.3		130	113	109	106	101	96	90	79	66	41
6S-12/350	12	9.3		142	123	119	116	110	104	98	86	72	44
6S-13/350	13	11		153	133	129	125	120	113	107	94	78	48
6S-14/350	14	11		165	144	139	135	129	122	115	101	84	52
6S-15/350	15	11		177	154	149	145	138	131	123	108	90	56
6S-16/350	16	13		189	164	159	154	147	139	131	115	96	59
6S-17/350	17	13		201	174	169	164	156	148	139	122	102	63
6S-18/350	18	13		212	185	179	174	166	157	148	130	108	67
6S-19/350	19	13		224	195	189	183	175	165	156	137	114	70
6S-20/350	20	15		236	205	199	193	184	174	164	144	120	74
6S-21/350	21	15		248	215	209	203	193	183	172	151	126	78
6S-22/350	22	18.5		260	226	219	212	202	191	180	158	132	81
6S-23/350	23	18.5		271	236	229	222	212	200	189	166	138	85
6S-24/350	24	18.5		283	246	239	232	221	209	197	173	144	89
6S-25/350	25	18.5		295	256	249	241	230	218	205	180	150	93
6S-26/350	26	22		307	267	259	251	239	226	213	187	156	96
6S-27/350	27	22		319	277	269	261	248	235	221	194	162	100
6S-28/350	28	22		330	287	279	270	258	244	230	202	168	104
6S-29/350	29	22		342	297	289	280	267	252	238	209	174	107

In view of continuous developments, the information / descriptions / specifications / illustrations are subject to change without notice.

Morsbach Maschinenbau GmbH
Zur Hardt 6, 51597 Morsbach-Überholz, Germany
Tel: +49 2294 599 | Fax: +49 2294 6121

STAINLESS STEEL SUBMERSIBLE PUMPS


Nominal Diameter: **6"**

Nominal Flow: **21m³/h**

Outlet Size: **2.5" - 3"**

Flow Range: **12-28m³/h**

Performance Curves: From 32 to 76 Stages

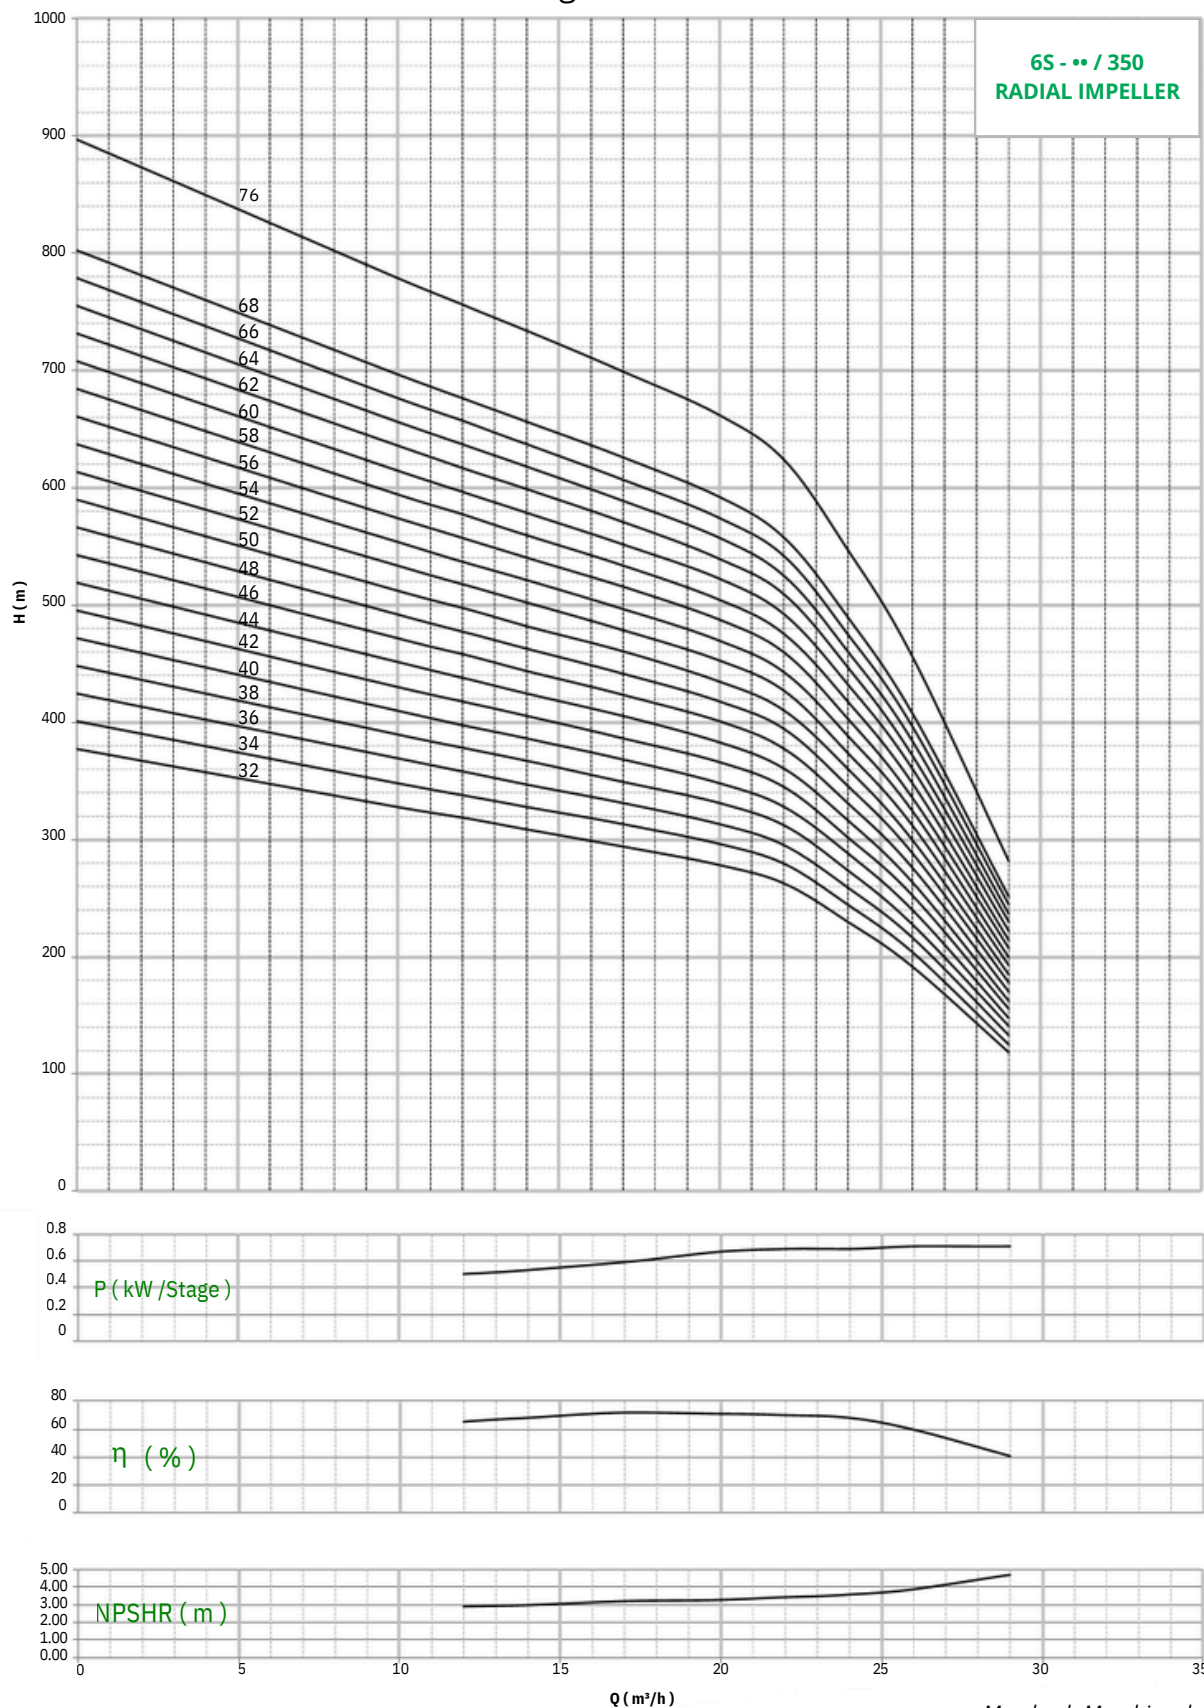

Refer General Information for performance curve conditions and for other details. Curves tolerance according to ISO : 9906, Annex - A

Morsbach Maschinenbau GmbH
Zur Hardt 6, 51597 Morsbach-Überholz, Germany
Tel: +49 2294 599 | Fax: +49 2294 6121

STAINLESS STEEL SUBMERSIBLE PUMPS

Nominal Diameter: **6"**


Nominal Flow: **21m³/h**

Outlet Size: **2.5" - 3"**

Flow Range: **12-28m³/h**

Performance Curves : From 32 to 76 Stages

DIMENSIONS & WEIGHT

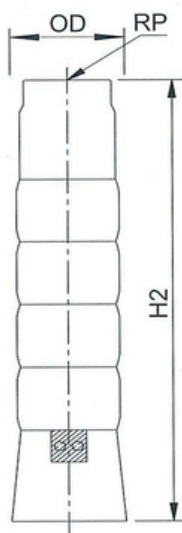

PUMP MODEL	No. of Stages	REQUIRED MOTOR POWER		DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
		Kw	HP	#OD	RP	H2	
6S-32/350	32	26	35	133	65-80	1832	35
6S-34/350	34	26	35	133	65-80	1930	37
6S-36/350	36	26	35	133	65-80	2028	39
6S-38/350	38	30	40	133	65-80	2126	41
6S-40/350	40	30	40	133	65-80	2224	43
6S-42/350	42	30	40	133	65-80	2322	45
6S-44/350	44	37	50	133	65-80	2420	47
6S-46/350	46	37	50	133	65-80	2518	49
6S-48/350	48	37	50	133	65-80	2616	51
6S-50/350	50	37	50	133	65-80	2714	53
6S-52/350	52	37	50	133	65-80	2812	55
6S-54/350	54	37	50	133	65-80	2910	57
6S-56/350	56	45	60	133	65-80	3008	59
6S-58/350	58	45	60	133	65-80	3106	61
6S-60/350	60	45	60	133	65-80	3204	63
6S-62/350	62	45	60	133	65-80	3302	65
6S-64/350	64	45	60	133	65-80	3400	67
6S-66/350	66	55	75	133	65-80	3498	69
6S-68/350	68	55	75	133	65-80	3596	71
6S-76/350	76	55	75	133	65-80	3988	79

PUMP MODEL	No. of Stages	MOTOR (Kw)	lps	0	2.78	3.33	3.89	4.72	5.56	6.11	6.67	7.22	8.06
			m ³ /h	0	10	12	14	17	20	22	24	26	29
6S-32/350	32	26	TOTAL MANOMETRIC HEAD IN METERS - (COLUMN WATER)	378	328	318	309	294	278	262	230	192	118
6S-34/350	34	26		401	349	338	328	313	296	279	245	204	126
6S-36/350	36	26		425	369	358	347	331	313	295	259	216	133
6S-38/350	38	30		448	390	378	367	350	331	312	274	228	141
6S-40/350	40	30		472	410	398	386	368	348	328	288	240	148
6S-42/350	42	30		496	431	418	405	386	365	344	302	252	155
6S-44/350	44	37		519	451	438	425	405	383	361	317	264	163
6S-46/350	46	37		543	472	458	444	423	400	377	331	276	170
6S-48/350	48	37		566	492	478	463	442	418	394	346	288	178
6S-50/350	50	9.3		590	513	498	483	460	435	410	360	300	185
6S-52/350	52	37		614	533	517	502	478	452	426	374	312	192
6S-54/350	54	37		637	554	537	521	497	470	443	389	324	200
6S-56/350	56	45		661	574	557	540	515	487	459	403	336	207
6S-58/350	58	45		684	595	577	560	534	505	476	418	348	215
6S-60/350	60	45		708	615	597	579	552	522	492	432	360	222
6S-62/350	62	45		732	636	617	598	570	539	508	446	372	229
6S-64/350	64	45		755	656	637	618	589	557	525	461	384	237
6S-66/350	66	55		779	677	657	637	607	574	541	475	396	244
6S-68/350	68	55		802	697	677	656	626	592	558	490	408	252
6S-76/350	76	55		897	779	756	733	699	661	623	547	456	281