

MMB

Morsbach Maschinenbau GmbH.

MMB 6" SUBMERSIBLE PUMP 6S /500 MODELS CATALOGUE



STAINLESS STEEL SUBMERSIBLE PUMPS


Nominal Diameter: **6"**

Nominal Flow: **30m³/h**

Outlet Size: **3"**

Flow Range: **20-32m³/h**

Performance Curves: From 2 to 21 Stages

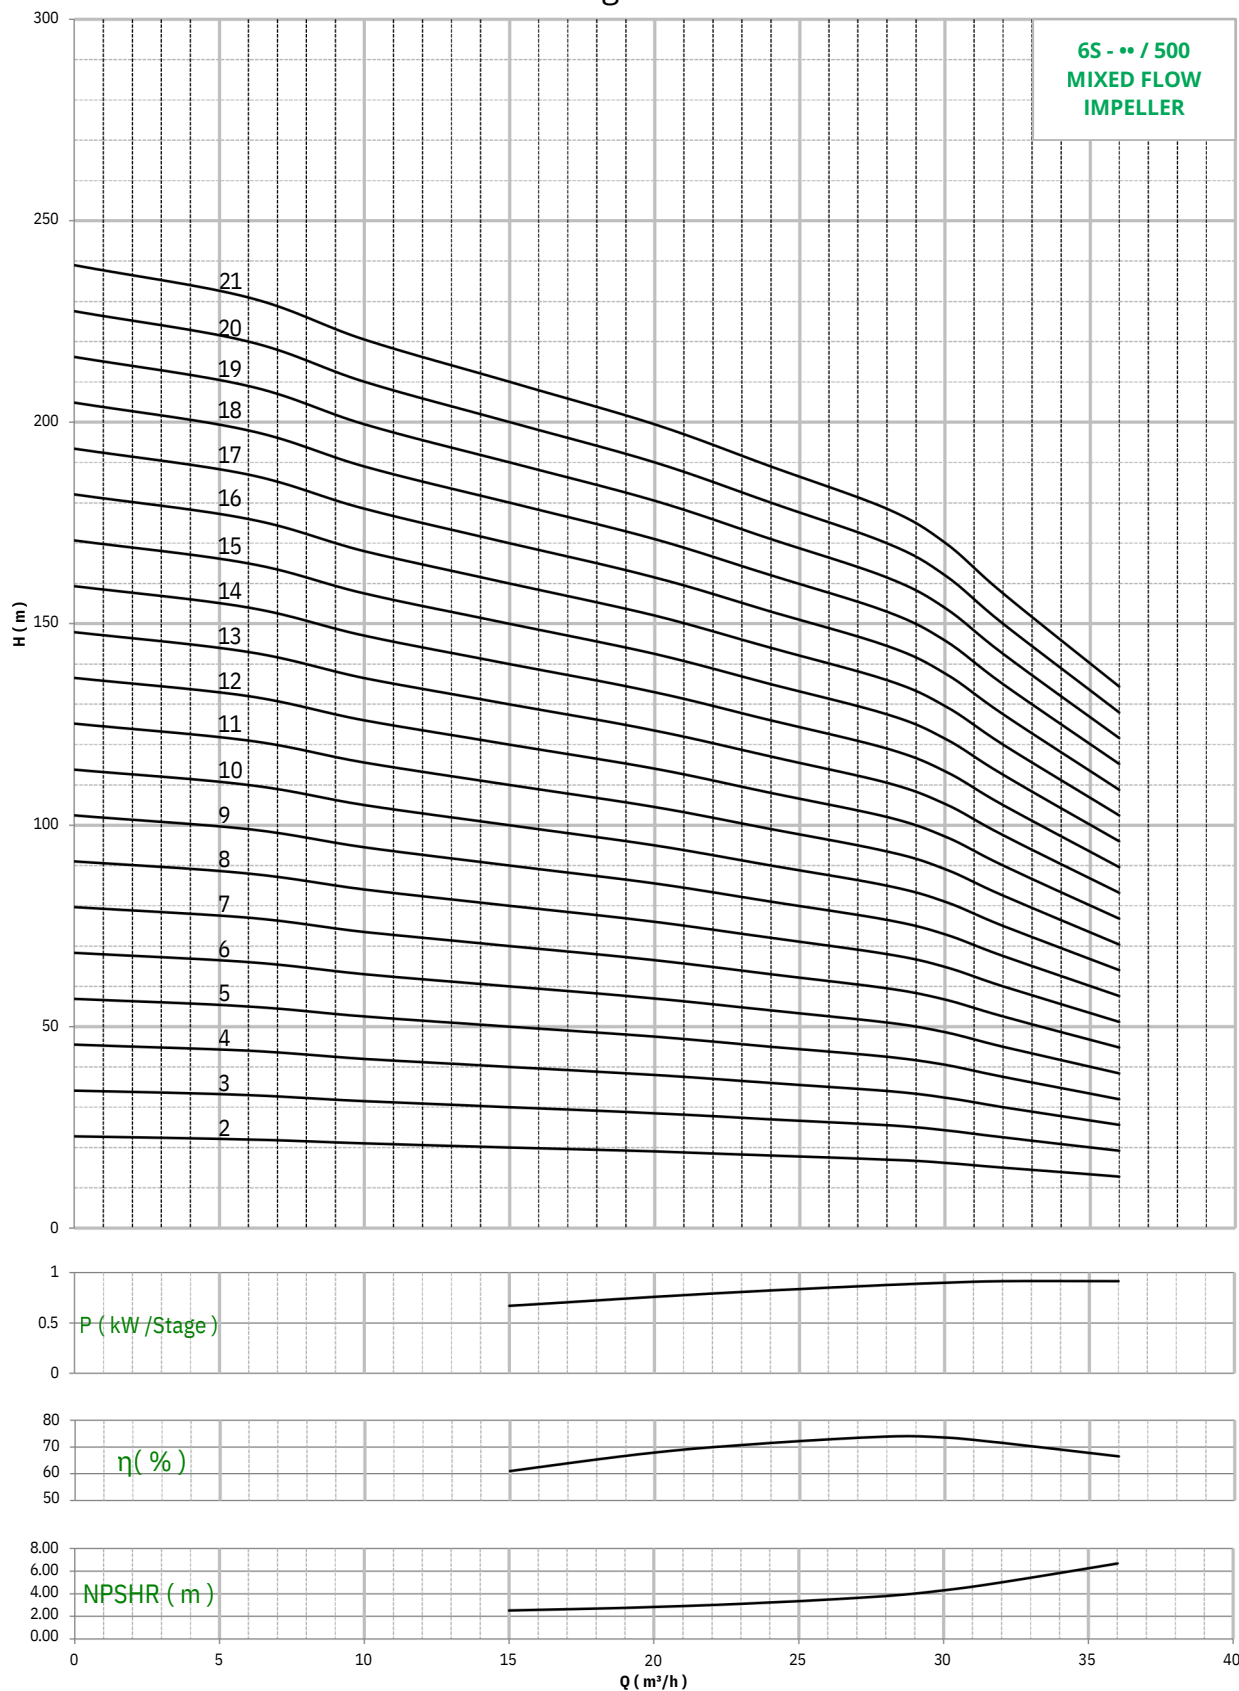

Refer General Information for performance curve conditions and for other details. Curves tolerance according to ISO : 9906, Annex - A

Morsbach Maschinenbau GmbH
Zur Hardt 6, 51597 Morsbach-Überholz, Germany
Tel: +49 2294 599 | Fax: +49 2294 6121

STAINLESS STEEL SUBMERSIBLE PUMPS

Nominal Diameter: **6"**


Nominal Flow: **30m³/h**

Outlet Size: **3"**

Flow Range: **20-32m³/h**

Performance Curves : From 2 to 21 Stages

DIMENSIONS & WEIGHT

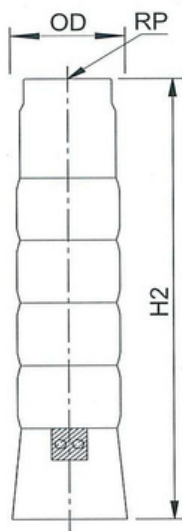

PUMP MODEL	No. of Stages	REQUIRED MOTOR POWER		DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
		Kw	HP	#OD	RP	H2	
6S-02/500	2	2.2	3	145/149	80	482	9.96
6S-03/500	3	3	4	145/149	80	578	11.84
6S-04/500	4	4	5.5	145/149	80	674	13.72
6S-05/500	5	5.5	7.5	145/149	80	770	15.6
6S-06/500	6	5.5	7.5	145/149	80	866	17.48
6S-07/500	7	7.5	10	145/149	80	962	19.36
6S-08/500	8	7.5	10	145/149	80	1058	21.24
6S-09/500	9	9.3	12.5	145/149	80	1154	23.12
6S-10/500	10	9.3	12.5	145/149	80	1250	25
6S-11/500	11	9.3	12.5	145/149	80	1346	26.88
6S-12/500	12	11	15	145/149	80	1442	28.76
6S-13/500	13	11	15	145/149	80	1538	30.64
6S-14/500	14	13	17.5	145/149	80	1634	32.52
6S-15/500	15	13	17.5	145/149	80	1730	34.4
6S-16/500	16	15	20	145/149	80	1826	36.28
6S-17/500	17	15	20	145/149	80	1922	38.16
6S-18/500	18	18.5	25	145/149	80	2018	40.04
6S-19/500	19	18.5	25	145/149	80	2114	41.92
6S-20/500	20	18.5	25	145/149	80	2210	43.8
6S-21/500	21	18.5	25	145/149	80	2306	45.68

PUMP MODEL	No. of Stages	MOTOR (Kw)	lps	0	1.67	2.78	4.17	5.56	6.67	7.78	8.33	8.89	10.00
			m ³ /h	0	6	10	15	20	24	28	30	32	36
6S-02/500	2	2.2	TOTAL MANOMETRIC HEAD IN METERS - (COLUMN WATER)	23	22	21	20	19	18	17	16	15	13
6S-03/500	3	3		34	33	32	30	29	27	26	24	23	19
6S-04/500	4	4		46	44	42	40	38	36	34	32	30	26
6S-05/500	5	5.5		57	55	53	50	48	45	43	41	38	32
6S-06/500	6	5.5		68	66	63	60	57	54	51	49	45	38
6S-07/500	7	7.5		80	77	74	70	67	63	60	57	53	45
6S-08/500	8	7.5		91	88	84	80	76	72	68	65	60	51
6S-09/500	9	9.3		102	99	95	90	86	81	77	73	68	58
6S-10/500	10	9.3		114	110	105	100	95	90	85	81	75	64
6S-11/500	11	9.3		125	121	116	110	105	99	94	89	83	70
6S-12/500	12	11		137	132	126	120	114	108	102	97	90	77
6S-13/500	13	11		148	143	137	130	124	117	111	105	98	83
6S-14/500	14	13		159	154	147	140	133	126	119	113	105	90
6S-15/500	15	13		171	165	158	150	143	135	128	122	113	96
6S-16/500	16	15		182	176	168	160	152	144	136	130	120	102
6S-17/500	17	15		193	187	179	170	162	153	145	138	128	109
6S-18/500	18	18.5		205	198	189	180	171	162	153	146	135	115
6S-19/500	19	18.5		216	209	200	190	181	171	162	154	143	122
6S-20/500	20	18.5		228	220	210	200	190	180	170	162	150	128
6S-21/500	21	18.5		239	231	221	210	200	189	179	170	158	134

STAINLESS STEEL SUBMERSIBLE PUMPS


Nominal Diameter: **6"**

Nominal Flow: **30m³/h**

Outlet Size: **3"**

Flow Range: **20-32m³/h**

Performance Curves: From 22 to 54 Stages

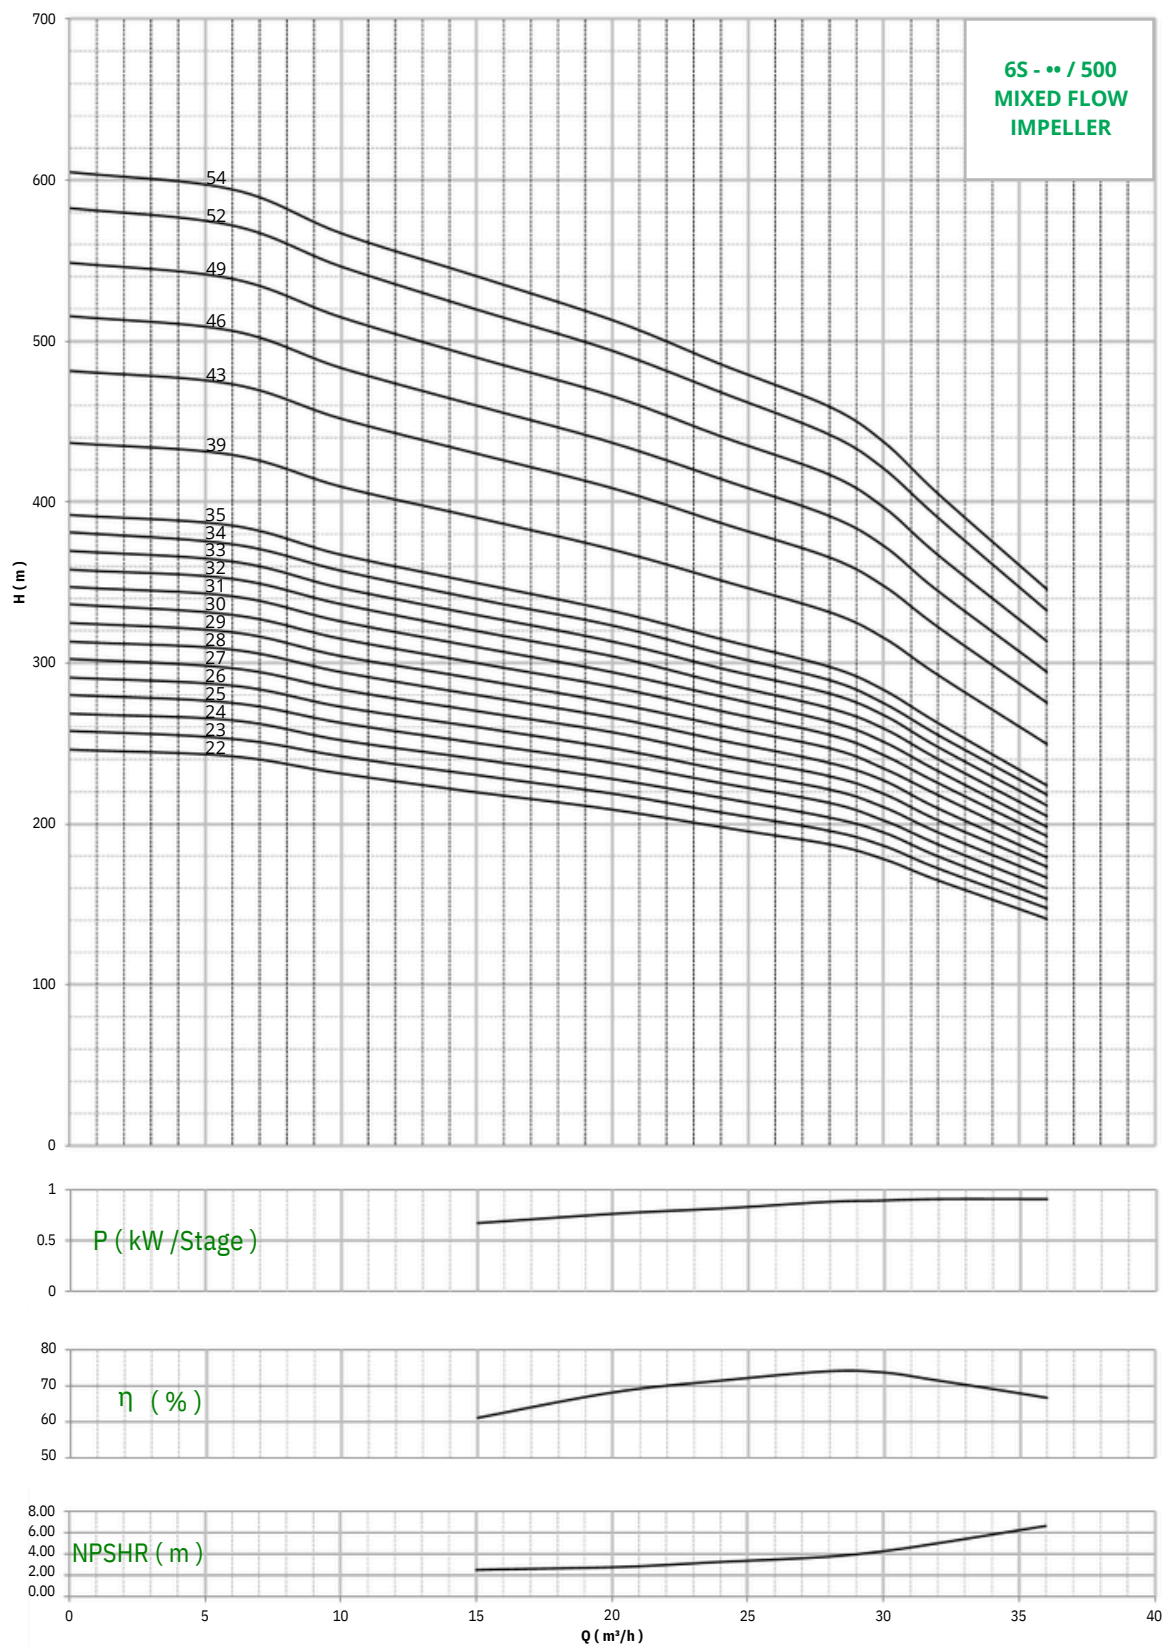

Refer General Information for performance curve conditions and for other details. Curves tolerance according to ISO : 9906, Annex - A

Morsbach Maschinenbau GmbH
Zur Hardt 6, 51597 Morsbach-Überholz, Germany
Tel: +49 2294 599 | Fax: +49 2294 6121

STAINLESS STEEL SUBMERSIBLE PUMPS

Nominal Diameter: **6"**


Nominal Flow: **30m³/h**

Outlet Size: **3"**

Flow Range: **20-32m³/h**

Performance Curves : From 22 to 54 Stages

DIMENSIONS & WEIGHT

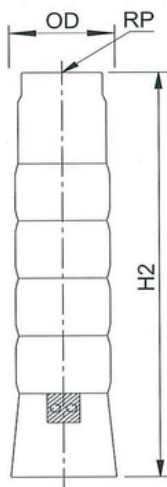

PUMP MODEL	No. of Stages	REQUIRED MOTOR POWER		DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
		Kw	HP	#OD	RP	H2	
6S-22/500	22	22	30	133	80	2402	47.56
6S-23/500	23	22	30	133	80	2498	49.44
6S-24/500	24	22	30	133	80	2594	51.32
6S-25/500	25	22	30	133	80	2690	53.2
6S-26/500	26	22	30	133	80	2786	55.08
6S-27/500	27	26	35	133	80	2882	56.96
6S-28/500	28	26	35	133	80	2978	58.84
6S-29/500	29	26	35	133	80	3074	60.72
6S-30/500	30	26	35	133	80	3170	62.6
6S-31/500	31	26	35	133	80	3266	64.48
6S-32/500	32	30	40	133	80	3362	66.36
6S-33/500	33	30	40	133	80	3458	68.24
6S-34/500	34	30	40	133	80	3554	70.12
6S-35/500	35	30	40	133	80	3650	72
6S-39/500	39	37	50	133	80	4034	79.52
6S-43/500	43	37	50	133	80	4418	87.04
6S-46/500	46	45	60	133	80	4706	92.68
6S-49/500	49	45	60	133	80	4994	98.32
6S-52/500	52	55	75	133	80	5282	103.96
6S-54/500	54	55	75	133	80	5474	107.72

PUMP MODEL	No. of Stages	MOTOR (Kw)	lps	0	1.67	2.78	4.17	5.56	6.67	7.78	8.33	8.89	10.00
			m³/h	0	6	10	15	20	24	28	30	32	36
6S-22/500	22	22	TOTAL MANOMETRIC HEAD IN METERS - (COLUMN WATER)	246	242	231	220	209	198	187	178	165	141
6S-23/500	23	22		258	253	242	230	219	207	196	186	173	147
6S-24/500	24	22		269	264	252	240	228	216	204	194	180	154
6S-25/500	25	22		280	275	263	250	238	225	213	203	188	160
6S-26/500	26	22		291	286	273	260	247	234	221	211	195	166
6S-27/500	27	26		302	297	284	270	257	243	230	219	203	173
6S-28/500	28	26		314	308	294	280	266	252	238	227	210	179
6S-29/500	29	26		325	319	305	290	276	261	247	235	218	186
6S-30/500	30	26		336	330	315	300	285	270	255	243	225	192
6S-31/500	31	26		347	341	326	310	295	279	264	251	233	198
6S-32/500	32	30		358	352	336	320	304	288	272	259	240	205
6S-33/500	33	30		370	363	347	330	314	297	281	267	248	211
6S-34/500	34	30		381	374	357	340	323	306	289	275	255	218
6S-35/500	35	30		392	385	368	350	333	315	298	284	263	224
6S-39/500	39	37		437	429	410	390	371	351	332	316	293	250
6S-43/500	43	37		482	473	452	430	409	387	366	348	323	275
6S-46/500	46	45		515	506	483	460	437	414	391	373	345	294
6S-49/500	49	45		549	539	515	490	466	441	417	397	368	314
6S-52/500	52	55		582	572	546	520	494	468	442	421	390	333
6S-54/500	54	55		605	594	567	540	513	486	459	437	405	346