

MMB

Morsbach Maschinenbau GmbH.

MMB 6" SUBMERSIBLE PUMP 6S /250 MODELS CATALOGUE



STAINLESS STEEL SUBMERSIBLE PUMPS





Nominal Diameter: **6"**

Nominal Flow: **15m³/h**

Outlet Size: **2.5"(2")**

Flow Range: **8-18m³/h**

Performance Curves: From 12 to 31 Stages

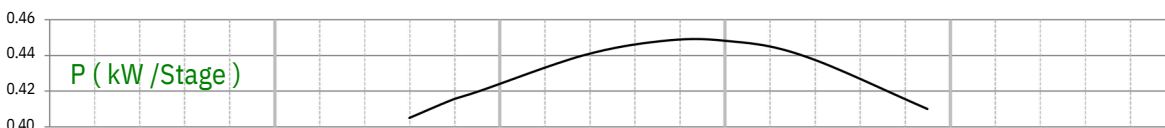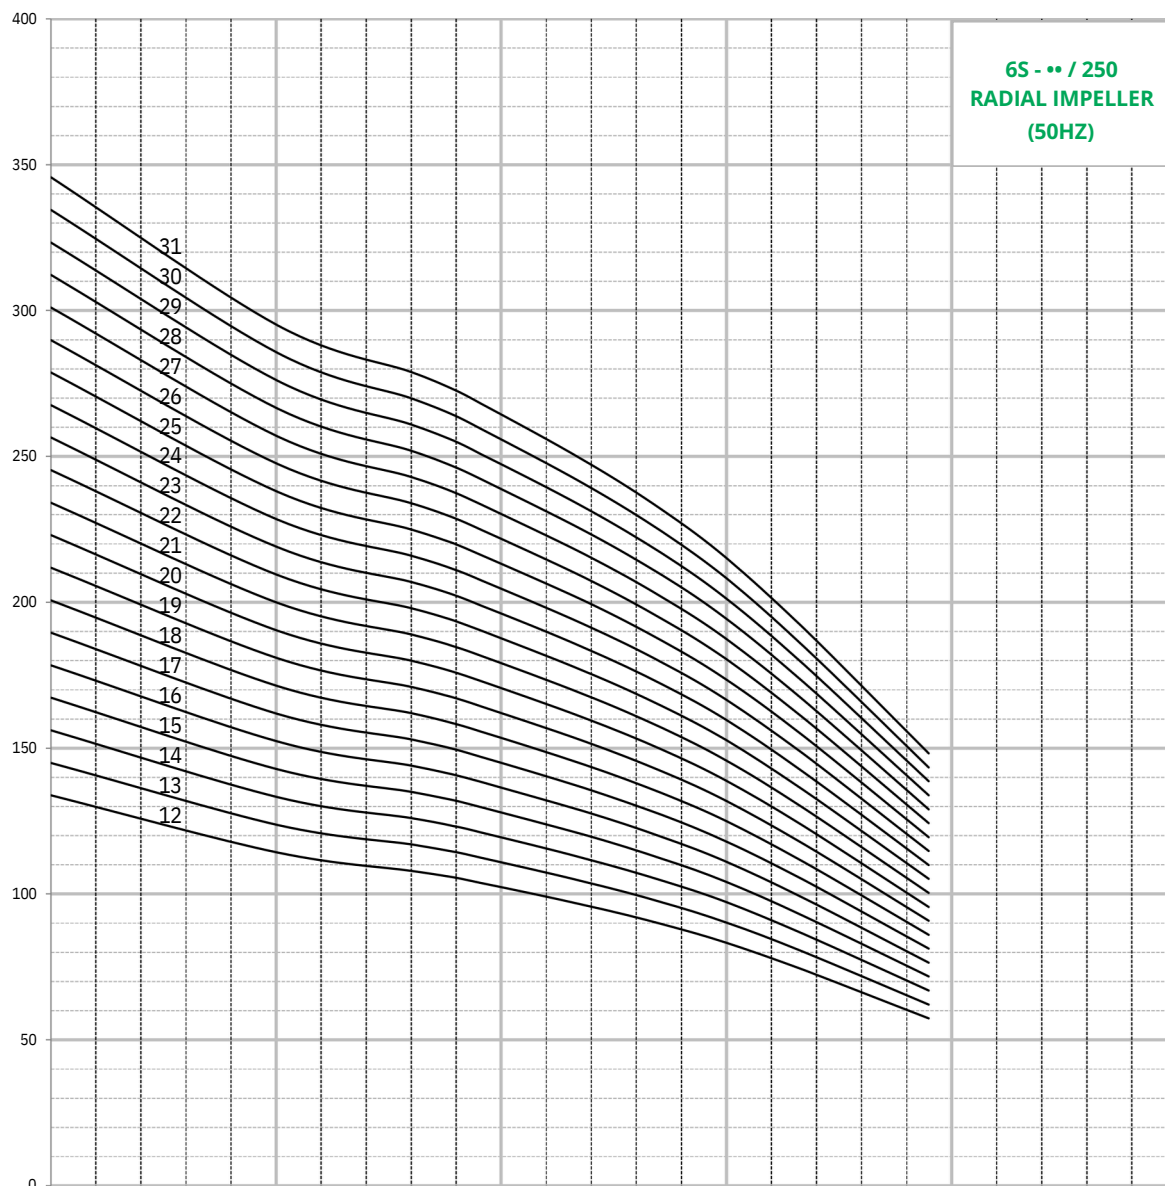

Refer General Information for performance curve conditions and for other details. Curves tolerance according to ISO : 9906, Annex - A

Q (m³/h)

Morsbach Maschinenbau GmbH
Zur Hardt 6, 51597 Morsbach-Überholz, Germany
Tel: +49 2294 599 | Fax: +49 2294 6121

STAINLESS STEEL SUBMERSIBLE PUMPS

Nominal Diameter: **6"**


Nominal Flow: **15m³/h**

Outlet Size: **2.5"(2")**

Flow Range: **8-18m³/h**

Performance Curves : From 12 to 31 Stages

DIMENSIONS & WEIGHT

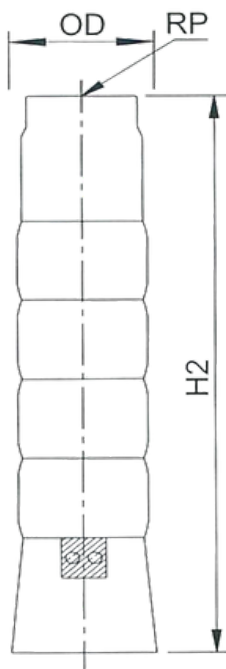

PUMP MODEL	No. of Stages	REQUIRED MOTOR POWER		APROX. DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
		Kw	HP	#OD	RP	H2	
6S-12/250	12	5.5	7.5	133	65-80	865	11.7
6S-13/250	13	5.5	7.5	133	65-80	915	12.5
6S-14/250	14	7.5	10	133	65-80	965	13.3
6S-15/250	15	7.5	10	133	65-80	1015	14.0
6S-16/250	16	7.5	10	133	65-80	1065	14.8
6S-17/250	17	7.5	10	133	65-80	1115	15.6
6S-18/250	18	9.3	12.5	133	65-80	1165	16.4
6S-19/250	19	9.3	12.5	133	65-80	1215	17.1
6S-20/250	20	9.3	12.5	133	65-80	1265	17.9
6S-21/250	21	9.3	12.5	133	65-80	1315	18.7
6S-22/250	22	11	15	133	65-80	1365	19.5
6S-23/250	23	11	15	133	65-80	1415	20.2
6S-24/250	24	11	15	133	65-80	1465	21.0
6S-25/250	25	13	17.5	133	65-80	1515	21.8
6S-26/250	26	13	17.5	133	65-80	1565	22.6
6S-27/250	27	13	17.5	133	65-80	1615	23.3
6S-28/250	28	13	17.5	133	65-80	1665	24.1
6S-29/250	29	13	17.5	133	65-80	1715	24.9
6S-30/250	30	13	17.5	133	65-80	1765	25.7
6S-31/250	31	15	20	133	65-80	1815	26.4

PUMP MODEL	No. of Stages	MOTOR (Kw)	lps	0	1.40	2.22	2.48	2.65	3.29	3.77	4.17	4.64	5.41
			m³/h	0	5	8	9	10	12	14	15	17	19
6S-12/250	12	5.5	TOTAL MANOMETRIC HEAD IN METERS - (COLUMN WATER)	134	114	108	106	104	96	90	83	74	57
6S-13/250	13	5.5		145	124	117	115	112	104	97	90	80	62
6S-14/250	14	7.5		156	133	126	123	121	112	105	97	86	67
6S-15/250	15	7.5		167	143	135	132	130	120	112	104	92	72
6S-16/250	16	7.5		178	152	144	141	138	128	120	111	99	76
6S-17/250	17	7.5		190	162	153	150	147	136	127	118	105	81
6S-18/250	18	9.3		201	171	162	159	156	144	134	125	111	86
6S-19/250	19	9.3		212	181	171	167	164	152	142	132	117	91
6S-20/250	20	9.3		223	190	180	176	173	160	149	139	123	96
6S-21/250	21	9.3		234	200	189	185	182	168	157	146	129	100
6S-22/250	22	11		245	209	198	194	190	176	164	153	136	105
6S-23/250	23	11		256	219	207	203	199	184	172	160	142	110
6S-24/250	24	11		268	228	216	211	208	192	179	167	148	115
6S-25/250	25	13		279	238	225	220	216	201	187	174	154	120
6S-26/250	26	13		290	247	234	229	225	209	194	180	160	124
6S-27/250	27	13		301	257	243	238	234	217	202	187	166	129
6S-28/250	28	13		312	266	252	247	242	225	209	194	172	134
6S-29/250	29	13		323	276	261	255	251	233	217	201	179	139
6S-30/250	30	13		335	285	270	264	260	241	224	208	185	143
6S-31/250	31	15		346	295	279	273	268	249	232	215	191	148

STAINLESS STEEL SUBMERSIBLE PUMPS


Nominal Diameter: **6"**

Nominal Flow: **15m³/h**

Outlet Size: **2.5"(2")**

Flow Range: **8-18m³/h**

Performance Curves: From 33 to 80 Stages

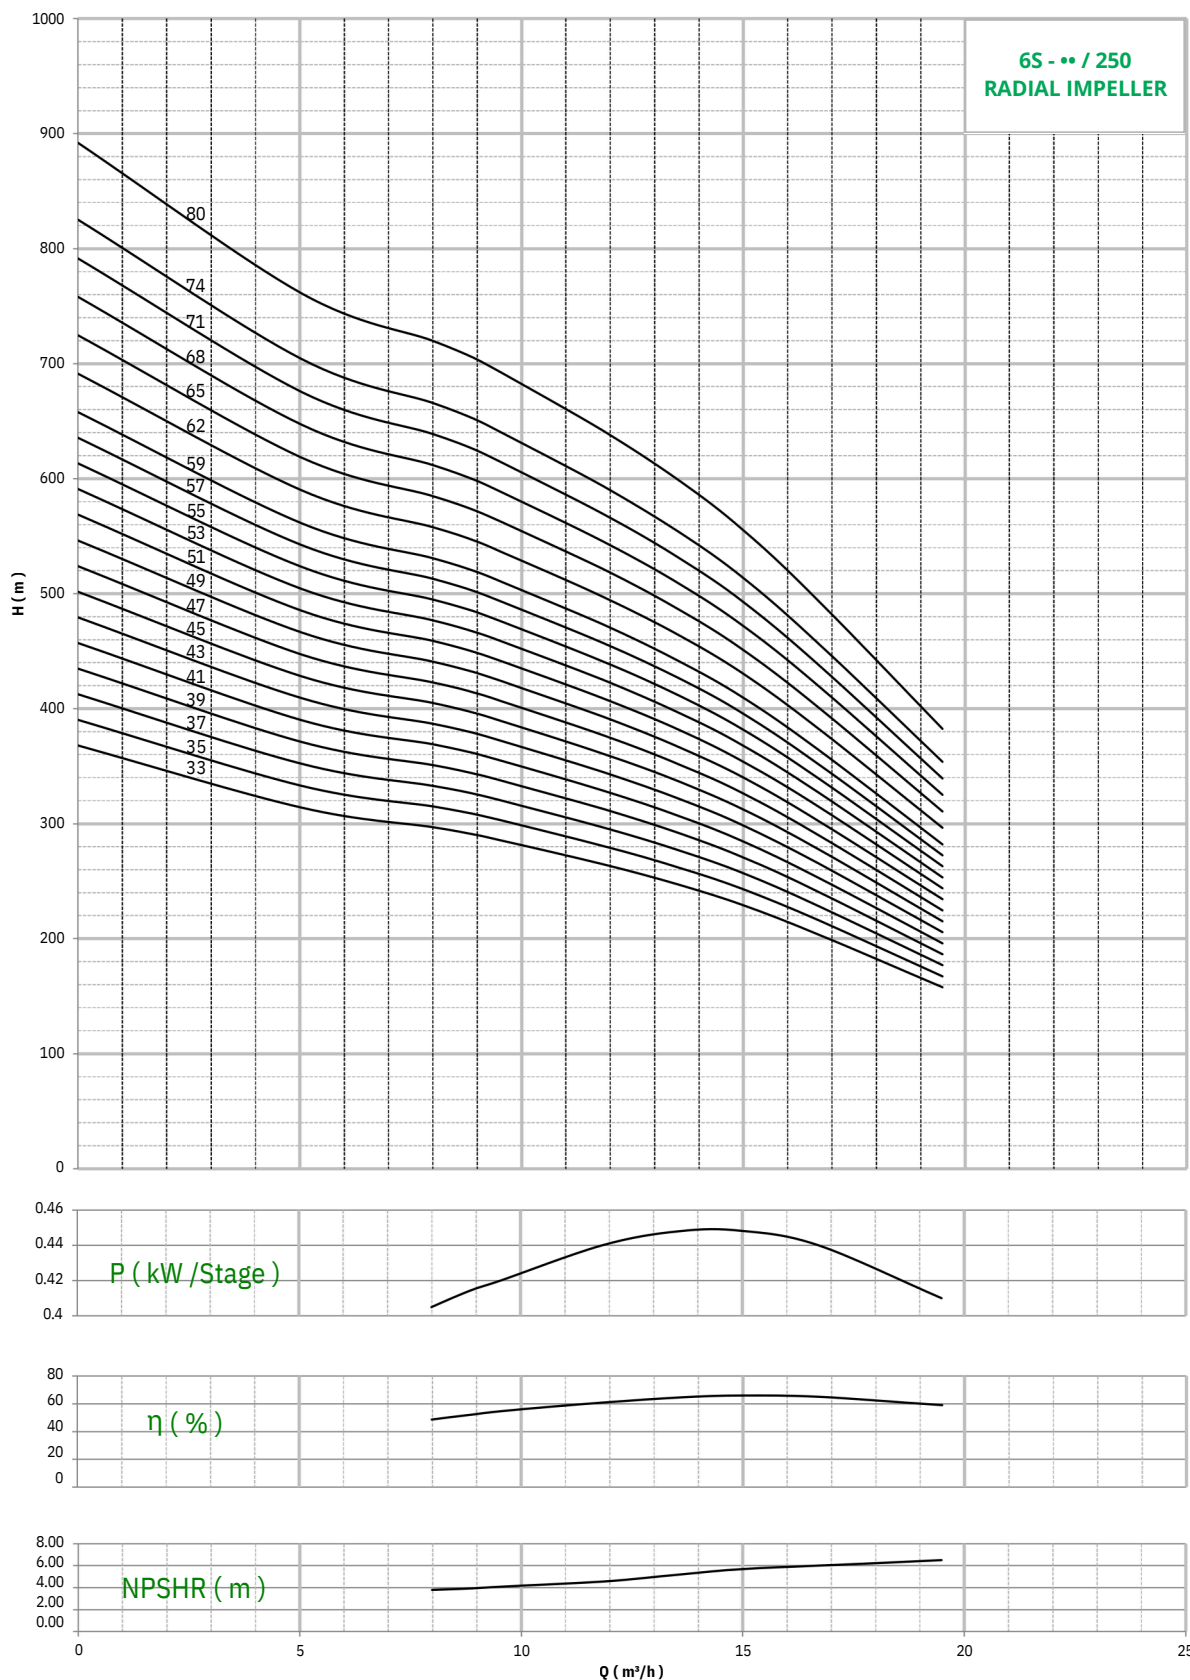

Refer General Information for performance curve conditions and for other details. Curves tolerance according to ISO : 9906, Annex - A

Morsbach Maschinenbau GmbH
Zur Hardt 6, 51597 Morsbach-Überholz, Germany
Tel: +49 2294 599 | Fax: +49 2294 6121

STAINLESS STEEL SUBMERSIBLE PUMPS

Nominal Diameter: **6"**


Nominal Flow: **15m³/h**

Outlet Size: **2.5"(2")**

Flow Range: **8-18m³/h**

Performance Curves : From 33 to 80 Stages

DIMENSIONS & WEIGHT

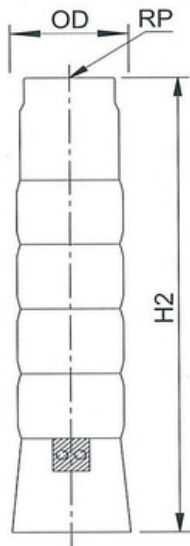

PUMP MODEL	No. of Stages	REQUIRED MOTOR POWER		APROX. DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
		Kw	HP	#OD	RP	H2	
6S-33/250	33	15	20	133	65-80	1915	28.0
6S-35/250	35	18.5	25	133	65-80	2015	29.5
6S-37/250	37	18.5	25	133	65-80	2115	31.1
6S-39/250	39	18.5	25	133	65-80	2215	32.6
6S-41/250	41	18.5	25	133	65-80	2315	34.2
6S-43/250	43	22	30	133	65-80	2415	35.7
6S-45/250	45	22	30	133	65-80	2515	37.3
6S-47/250	47	22	30	133	65-80	2615	38.8
6S-49/250	49	22	30	133	65-80	2715	40.4
6S-51/250	51	26	35	133	65-80	2815	41.9
6S-53/250	53	26	35	133	65-80	2915	43.5
6S-55/250	55	26	35	133	65-80	3015	45.0
6S-57/250	57	26	35	133	65-80	3115	46.6
6S-59/250	59	30	40	133	65-80	3215	48.1
6S-62/250	62	30	40	133	65-80	3365	50.5
6S-65/250	65	30	40	133	65-80	3515	52.8
6S-68/250	68	37	50	133	65-80	3665	55.1
6S-71/250	71	37	50	133	65-80	3815	57.4
6S-74/250	74	37	50	133	65-80	3965	59.8
6S-80/250	80	37	50	133	65-80	4265	64.4

PUMP MODEL	No. of Stages	MOTOR (Kw)	lps	0	1.40	2.22	2.48	2.65	3.29	3.77	4.17	4.64	5.41
			m ³ /h	0	5	8	9	10	12	14	15	17	19
6S-12/250	33	15	TOTAL MANOMETRIC HEAD IN METERS - (COLUMN WATER)	368	314	297	291	285	265	247	229	203	158
6S-35/250	35	18.5		390	333	315	308	303	281	261	243	216	167
6S-37/250	37	18.5		413	352	333	326	320	297	276	257	228	177
6S-39/250	39	18.5		435	371	351	344	337	313	291	271	240	186
6S-41/250	41	18.5		457	390	369	361	355	329	306	285	253	196
6S-43/250	43	22		479	409	387	379	372	345	321	298	265	206
6S-45/250	45	22		502	428	405	396	389	361	336	312	277	215
6S-47/250	47	22		524	447	423	414	407	377	351	326	290	225
6S-49/250	49	22		546	466	441	432	424	393	366	340	302	234
6S-51/250	51	26		569	485	459	449	441	409	381	354	314	244
6S-53/250	53	26		591	504	477	467	458	425	396	368	326	253
6S-55/250	55	26		613	523	495	485	476	441	411	382	339	263
6S-57/250	57	26		636	542	513	502	493	457	426	396	351	272
6S-59/250	59	30		658	561	531	520	510	473	441	409	363	282
6S-62/250	62	30		691	590	558	546	536	497	463	430	382	296
6S-65/250	65	30		725	618	585	573	562	521	486	451	400	311
6S-68/250	68	37		758	647	612	599	588	545	508	472	419	325
6S-71/250	71	37		792	675	639	626	614	569	530	493	437	339
6S-74/250	74	37		825	704	666	652	640	593	553	514	456	354
6S-80/250	80	37		892	761	720	705	692	642	598	555	493	382