

MMB

Morsbach Maschinenbau GmbH.

MMB 6" SUBMERSIBLE PUMP 6S /750 SERIES CATALOGUE



STAINLESS STEEL SUBMERSIBLE PUMPS


Nominal Diameter: **6"**

Nominal Flow: **45m³/h**

Outlet Size: **3" - 4"**

Flow Range: **30-60m³/h**

Performance Curves: From 2 to 21 Stages

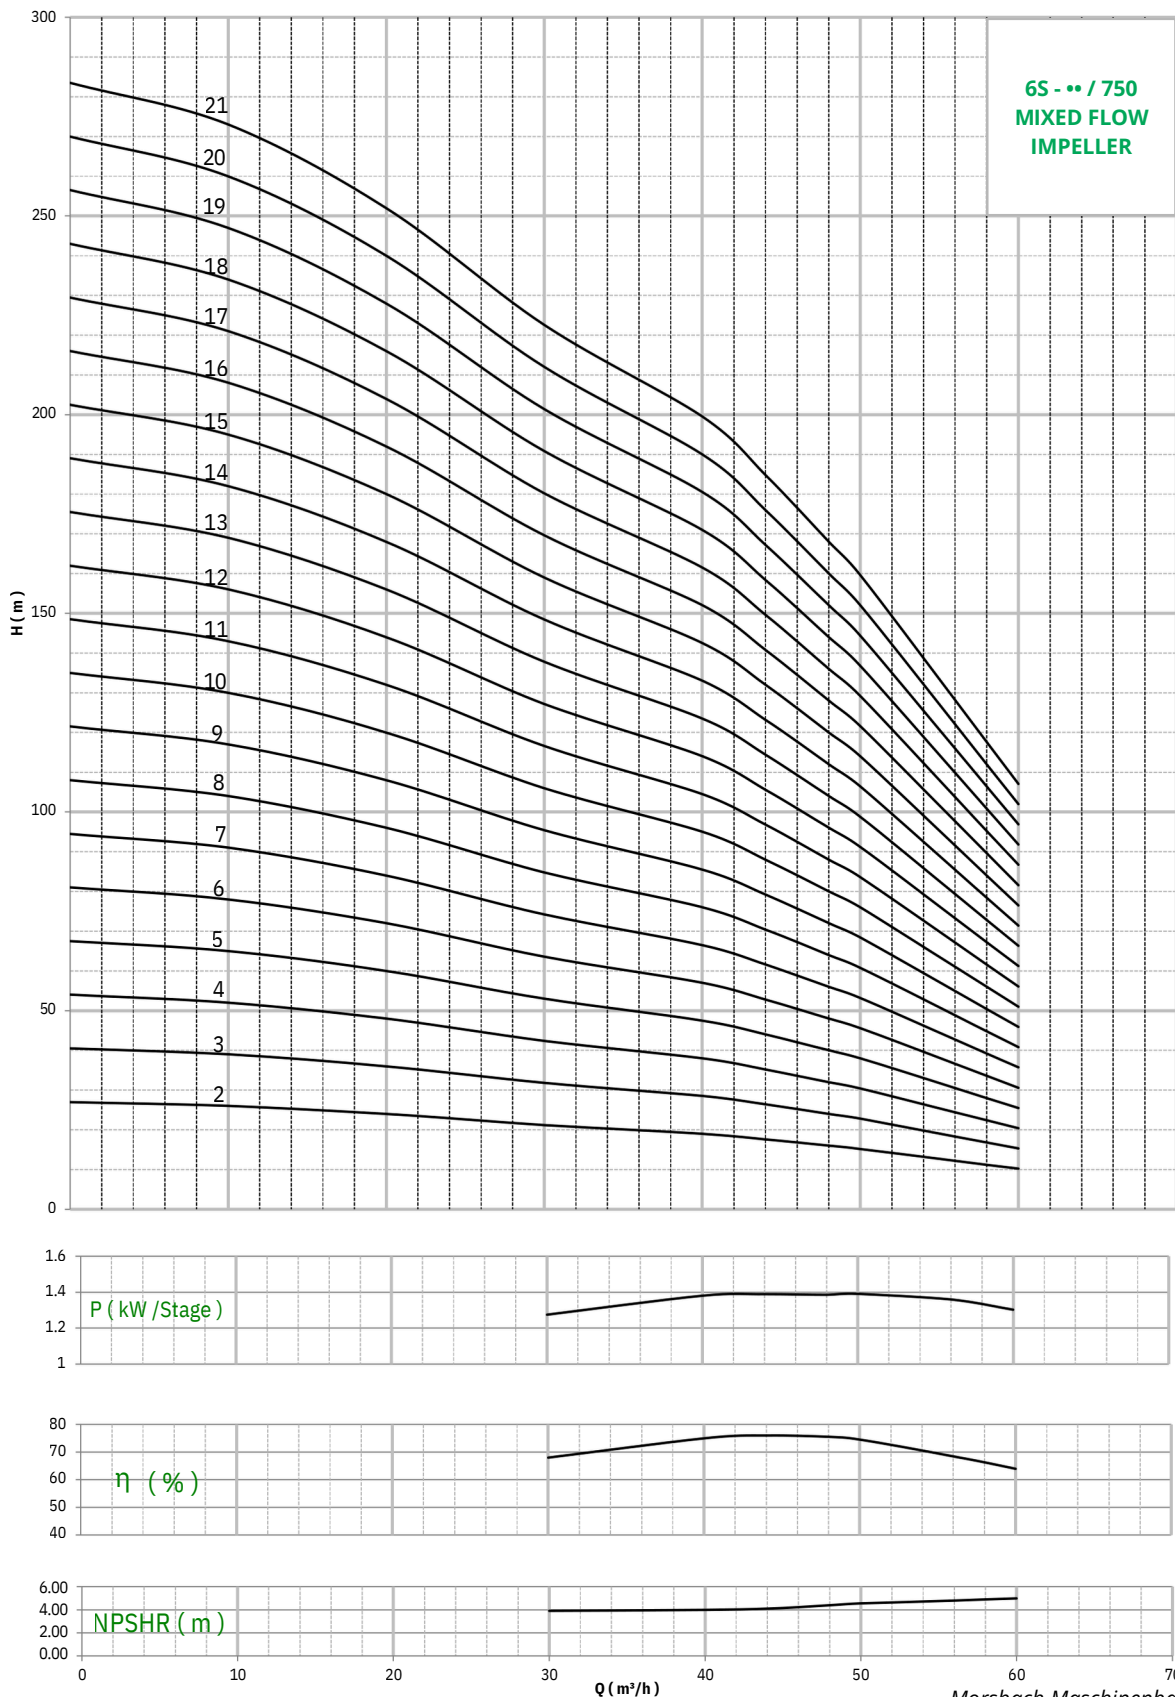

Refer General Information for performance curve conditions and for other details. Curves tolerance according to ISO : 9906, Annex - A

Morsbach Maschinenbau GmbH
Zur Hardt 6, 51597 Morsbach-Überholz, Germany
Tel: +49 2294 599 | Fax: +49 2294 6121

STAINLESS STEEL SUBMERSIBLE PUMPS

Nominal Diameter: **6"**


Nominal Flow: **45m³/h**

Outlet Size: **3"- 4"**

Flow Range: **30-60m³/h**

Performance Curves : From 2 to 21 Stages

DIMENSIONS & WEIGHT

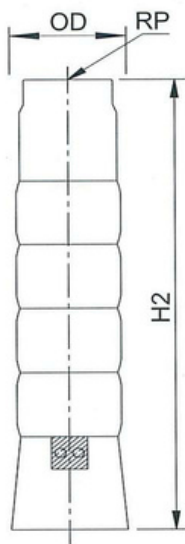

PUMP MODEL	No. of Stages	REQUIRED MOTOR POWER		DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
		Kw	HP	#OD	RP	H2	
6S-2/750	2	3	4	195	80/100	51.7	7.64
6S-3/750	3	5.5	7.5	195	80/100	63	10.14
6S-4/750	4	7.5	10	195	80/100	74.3	12.64
6S-5/750	5	7.5	10	195	80/100	85.6	15.14
6S-6/750	6	9.3	12.5	195	80/100	96.9	17.64
6S-7/750	7	11	12.5	195	80/100	108.2	20.14
6S-8/750	8	13	17.5	195	80/100	119.5	22.64
6S-9/750	9	15	20	195	80/100	130.8	25.14
6S-10/750	10	15	20	195	80/100	142.1	27.64
6S-11/750	11	18.5	25	195	80/100	153.4	30.14
6S-12/750	12	18.5	25	195	80/100	164.7	32.64
6S-13/750	13	22	30	195	80/100	176	35.14
6S-14/750	14	22	30	195	80/100	187.3	37.64
6S-15/750	15	22	30	195	80/100	198.6	40.14
6S-16/750	16	26	35	195	80/100	209.9	42.64
6S-17/750	17	26	35	195	80/100	221.2	45.14
6S-18/750	18	30	40	195	80/100	232.5	47.64
6S-19/750	19	30	40	195	80/100	243.8	50.14
6S-20/750	20	37	50	195	80/100	255.1	52.64
6S-21/750	21	37	50	195	80/100	266.4	55.14

PUMP MODEL	No. of Stages	MOTOR (Kw)	lps	0	2.78	5.56	8.33	11.11	12.22	13.33	13.89	15.56	16.67
			m³/h	0	10	20	30	40	44	48	50	56	60
6S-2/750	2	3	TOTAL MANOMETRIC HEAD IN METERS - (COLUMN WATER)	27	26	24	21	19	18	16	15	12	10
6S-3/750	3	5.5		41	39	36	32	29	26	24	23	18	15
6S-4/750	4	7.5		54	52	48	42	38	35	32	30	24	20
6S-5/750	5	7.5		68	65	60	53	48	44	40	38	31	26
6S-6/750	6	9.3		81	78	72	64	57	53	48	46	37	31
6S-7/750	7	11		95	91	84	74	67	62	56	53	43	36
6S-8/750	8	13		108	104	96	85	76	70	64	61	49	41
6S-9/750	9	15		122	117	108	95	86	79	72	68	55	46
6S-10/750	10	15		135	130	120	106	95	88	80	76	61	51
6S-11/750	11	18.5		149	143	132	117	105	97	88	84	67	56
6S-12/750	12	18.5		162	156	144	127	114	106	96	91	73	61
6S-13/750	13	22		176	169	156	138	124	114	104	99	79	66
6S-14/750	14	22		189	182	168	148	133	123	112	106	85	71
6S-15/750	15	22		203	195	180	159	143	132	120	114	92	77
6S-16/750	16	26		216	208	192	170	152	141	128	122	98	82
6S-17/750	17	26		230	221	204	180	162	150	136	129	104	87
6S-18/750	18	30		243	234	216	191	171	158	144	137	110	92
6S-19/750	19	30		257	247	228	201	181	167	152	144	116	97
6S-20/750	20	37		270	260	240	212	190	176	160	152	122	102
6S-21/750	21	37		284	273	252	223	200	185	168	160	128	107

STAINLESS STEEL SUBMERSIBLE PUMPS


Nominal Diameter: **6"**

Nominal Flow: **45m³/h**

Outlet Size: **3" - 4"**

Flow Range: **30-60m³/h**

Performance Curves: From 22 to 41 Stages

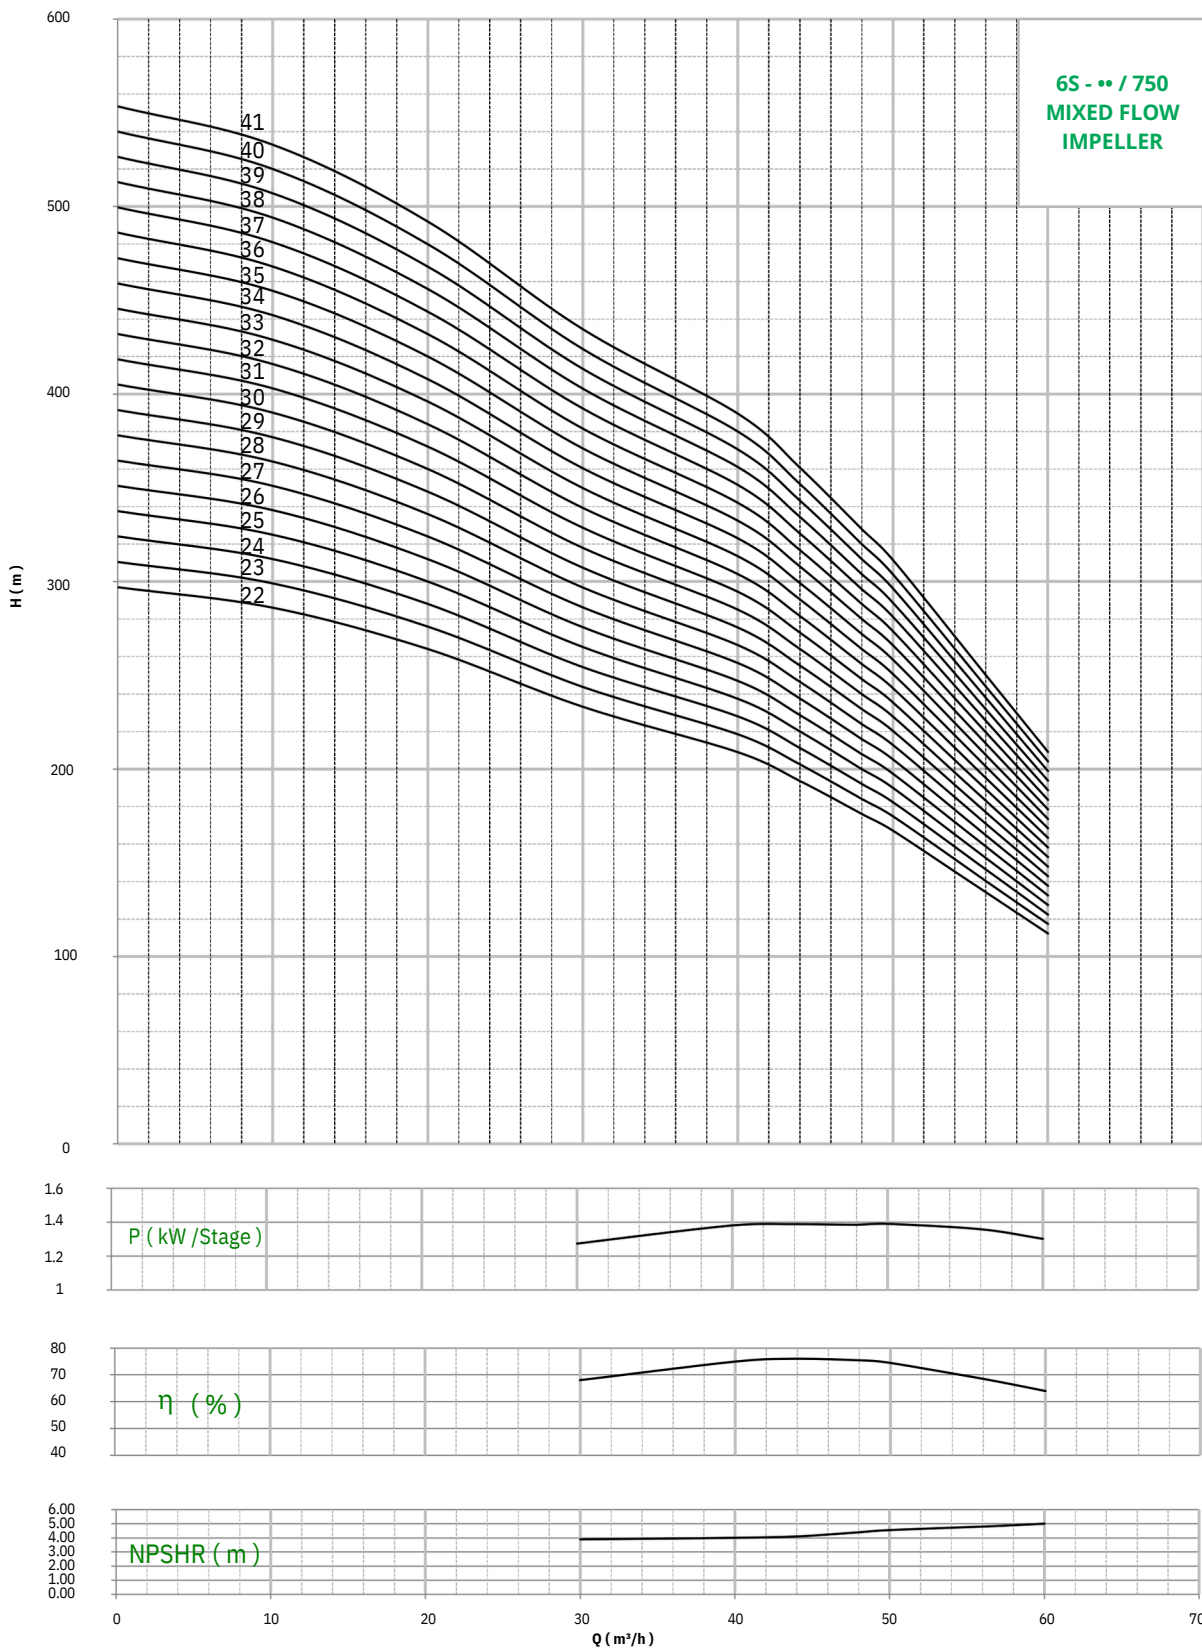

Refer General Information for performance curve conditions and for other details. Curves tolerance according to ISO : 9906, Annex - A

Morsbach Maschinenbau GmbH
Zur Hardt 6, 51597 Morsbach-Überholz, Germany
Tel: +49 2294 599 | Fax: +49 2294 6121

STAINLESS STEEL SUBMERSIBLE PUMPS

Nominal Diameter: **6"**


Nominal Flow: **45m³/h**

Outlet Size: **3" - 4"**

Flow Range: **30-60m³/h**

Performance Curves : From 22 to 41 Stages

DIMENSIONS & WEIGHT

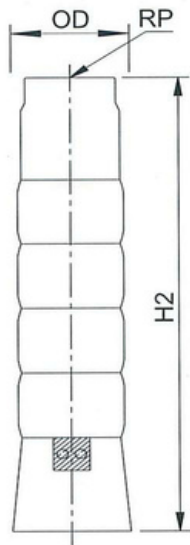

PUMP MODEL	No. of Stages	REQUIRED MOTOR POWER		DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
		Kw	HP	#OD	RP	H2	
6S-22/750	22	37	50	195	80/100	277.7	57.64
6S-23/750	23	37	50	195	80/100	289	60.14
6S-24/750	24	37	50	195	80/100	300.3	62.64
6S-25/750	25	45	60	195	80/100	311.6	65.14
6S-26/750	26	45	60	195	80/100	322.9	67.64
6S-27/750	27	45	60	195	80/100	334.2	70.14
6S-28/750	28	45	60	195	80/100	345.5	72.64
6S-29/750	29	45	60	195	80/100	356.8	75.14
6S-30/750	30	45	60	195	80/100	368.1	77.64
6S-31/750	31	55	75	195	80/100	379.4	80.14
6S-32/750	32	55	75	195	80/100	390.7	82.64
6S-33/750	33	55	75	195	80/100	402	85.14
6S-34/750	34	55	75	195	80/100	413.3	87.64
6S-35/750	35	55	75	195	80/100	424.6	90.14
6S-36/750	36	55	85	195	80/100	435.9	92.64
6S-37/750	37	63	85	195	80/100	447.2	95.14
6S-38/750	38	63	85	195	80/100	458.5	97.64
6S-39/750	39	75	100	195	80/100	469.8	100.14
6S-40/750	40	75	100	195	80/100	481.1	102.64
6S-41/750	41	75	100	195	80/100	492.4	105.14

PUMP MODEL	No. of Stages	MOTOR (Kw)	lps	0	2.78	5.56	8.33	11.11	12.22	13.33	13.89	15.56	16.67
			m ³ /h	0	10	20	30	40	44	48	50	56	60
6S-22/750	22	37	TOTAL MANOMETRIC HEAD IN METERS - (COLUMN WATER)	297	286	264	233	209	194	176	167	134	112
6S-23/750	23	37		311	299	276	244	219	202	184	175	140	117
6S-24/750	24	37		324	312	288	254	228	211	192	182	146	122
6S-25/750	25	45		338	325	300	265	238	220	200	190	153	128
6S-26/750	26	45		351	338	312	276	247	229	208	198	159	133
6S-27/750	27	45		365	351	324	286	257	238	216	205	165	138
6S-28/750	28	45		378	364	336	297	266	246	224	213	171	143
6S-29/750	29	45		392	377	348	307	276	255	232	220	177	148
6S-30/750	30	45		405	390	360	318	285	264	240	228	183	153
6S-31/750	31	55		419	403	372	329	295	273	248	236	189	158
6S-32/750	32	55		432	416	384	339	304	282	256	243	195	163
6S-33/750	33	55		446	429	396	350	314	290	264	251	201	168
6S-34/750	34	55		459	442	408	360	323	299	272	258	207	173
6S-35/750	35	55		473	455	420	371	333	308	280	266	214	179
6S-36/750	36	55		486	468	432	382	342	317	288	274	220	184
6S-37/750	37	63		500	481	444	392	352	326	296	281	226	189
6S-38/750	38	63		513	494	456	403	361	334	304	289	232	194
6S-39/750	39	75		527	507	468	413	371	343	312	296	238	199
6S-40/750	40	75		540	520	480	424	380	352	320	304	244	204
6S-41/750	41	75		554	533	492	435	390	361	328	312	250	209