

MMB

Morsbach Maschinenbau GmbH.

MMB 8" SUBMERSIBLE PUMP 8S-SERIES CATALOGUE



STAINLESS STEEL SUBMERSIBLE PUMPS


Nominal Diameter: **8"**

Nominal Flow: **75m³/h**

Outlet Size: **4"/ 5"**

Flow Range: **40-100m³/h**

Performance Curves: From 2 to 21 Stages

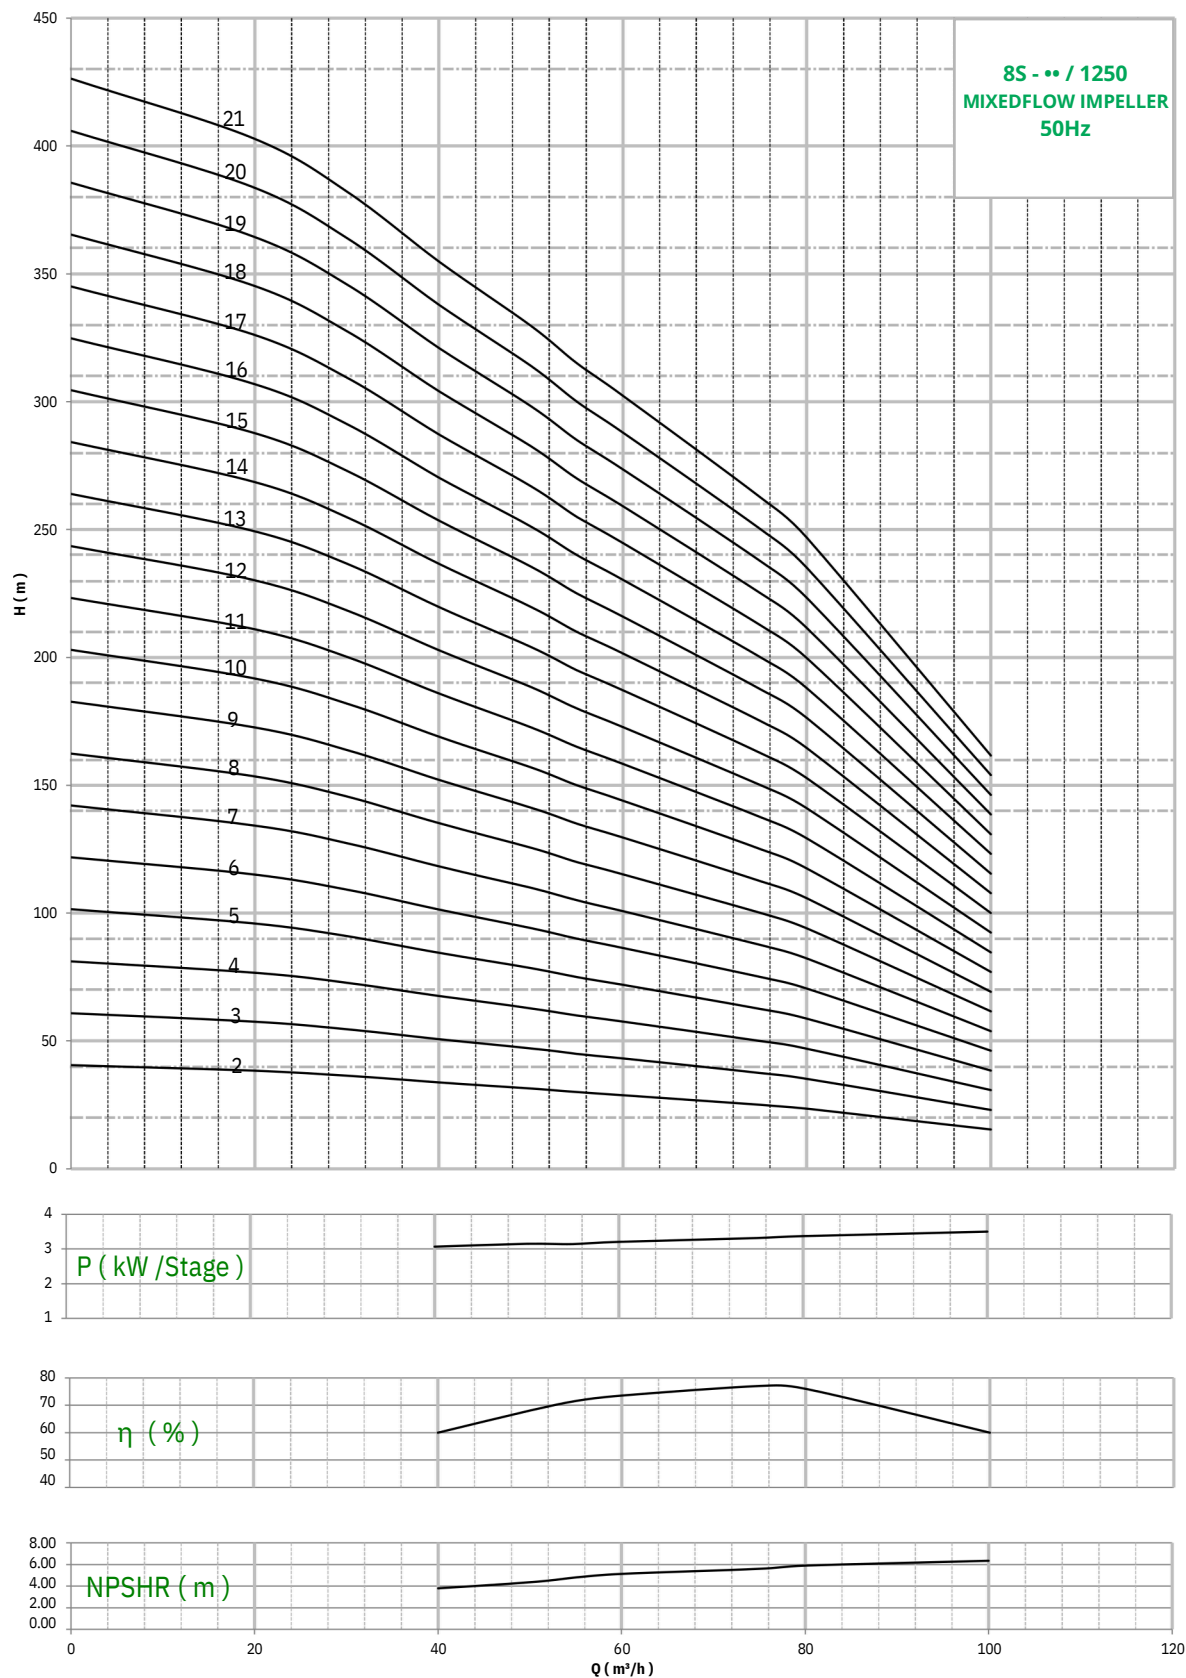

Refer General Information for performance curve conditions and for other details. Curves tolerance according to ISO : 9906, Annex - A

Morsbach Maschinenbau GmbH
Zur Hardt 6, 51597 Morsbach-Überholz, Germany
Tel: +49 2294 599 | Fax: +49 2294 6121

STAINLESS STEEL SUBMERSIBLE PUMPS

Nominal Diameter: **8"**


Nominal Flow: **75m³/h**

Outlet Size: **4"/5"**

Flow Range: **40-100m³/h**

Performance Curves : From 2 to 21 Stages

DIMENSIONS & WEIGHT

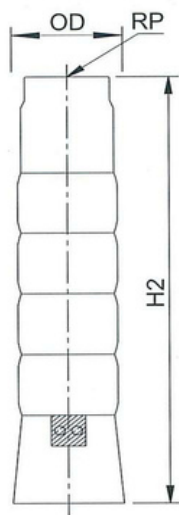

PUMP MODEL	No. of Stages	REQUIRED MOTOR POWER		DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
		Kw	HP	#OD	RP	H2	
8S-02/1250	2	7.5	10	195	125	738	22.7
8S-03/1250	3	13	17.5	195	125	866	26.4
8S-04/1250	4	15	20	195	125	994	30.1
8S-05/1250	5	18.5	25	195	125	1122	33.8
8S-06/1250	6	26	35	195	125	1250	37.5
8S-07/1250	7	30	40	195	125	1378	41.2
8S-08/1250	8	30	40	195	125	1506	44.9
8S-09/1250	9	37	50	195	125	1634	48.6
8S-10/1250	10	45	60	195	125	1762	52.3
8S-11/1250	11	45	60	195	125	1890	56
8S-12/1250	12	55	75	195	125	2018	59.7
8S-13/1250	13	55	75	195	125	2146	63.4
8S-14/1250	14	63	85	195	125	2274	67.1
8S-15/1250	15	75	100	195	125	2402	70.8
8S-16/1250	16	75	100	195	125	2530	74.5
8S-17/1250	17	75	100	195	125	2658	78.2
8S-18/1250	18	93	125	195	125	2786	81.9
8S-19/1250	19	75	125	195	125	2914	85.6
8S-20/1250	20	93	125	195	125	3042	89.3
8S-21/1250	21	110	150	195	125	3170	93

PUMP MODEL	No. of Stages	MOTOR (Kw)	lps	0	5.47	8.33	11.11	13.89	15.28	16.67	20.83	22.22	27.78
			m ³ /h	0	20	30	40	50	55	60	75	80	100
8S-02/1250	2	7.5	TOTAL MANOMETRIC HEAD IN METERS - (COLUMN WATER)	41	38	36	34	31	30	29	25	24	15
8S-03/1250	3	13		61	58	55	51	47	45	43	38	35	23
8S-04/1250	4	15		81	77	73	68	63	60	58	50	47	31
8S-05/1250	5	18.5		102	96	91	85	79	75	72	63	59	39
8S-06/1250	6	26		122	115	109	101	94	90	86	75	71	46
8S-07/1250	7	30		142	134	127	118	110	105	101	88	82	54
8S-08/1250	8	30		162	154	146	135	126	120	115	100	94	62
8S-09/1250	9	37		183	173	164	152	141	135	130	113	106	69
8S-10/1250	10	45		203	192	182	169	157	150	144	125	118	77
8S-11/1250	11	45		223	211	200	186	173	165	158	138	129	85
8S-12/1250	12	55		244	230	218	203	188	180	173	150	141	92
8S-13/1250	13	55		264	250	237	220	204	195	187	163	153	100
8S-14/1250	14	63		284	269	255	237	220	210	202	175	165	108
8S-15/1250	15	75		305	288	273	254	236	225	216	188	176	116
8S-16/1250	16	75		325	307	291	270	251	240	230	200	188	123
8S-17/1250	17	75		345	326	309	287	267	255	245	213	200	131
8S-18/1250	18	93		365	346	328	304	283	270	259	225	212	139
8S-19/1250	19	75		386	365	346	321	298	285	274	238	223	146
8S-20/1250	20	93		406	384	364	338	314	300	288	250	235	154
8S-21/1250	21	110		426	403	382	355	330	315	302	263	247	162

STAINLESS STEEL SUBMERSIBLE PUMPS


Nominal Diameter: **8"**

Nominal Flow: **90m³/h**

Outlet Size: **4"/ 5"**

Flow Range: **60-108m³/h**

Performance Curves : From 5 stages up to 24 stages

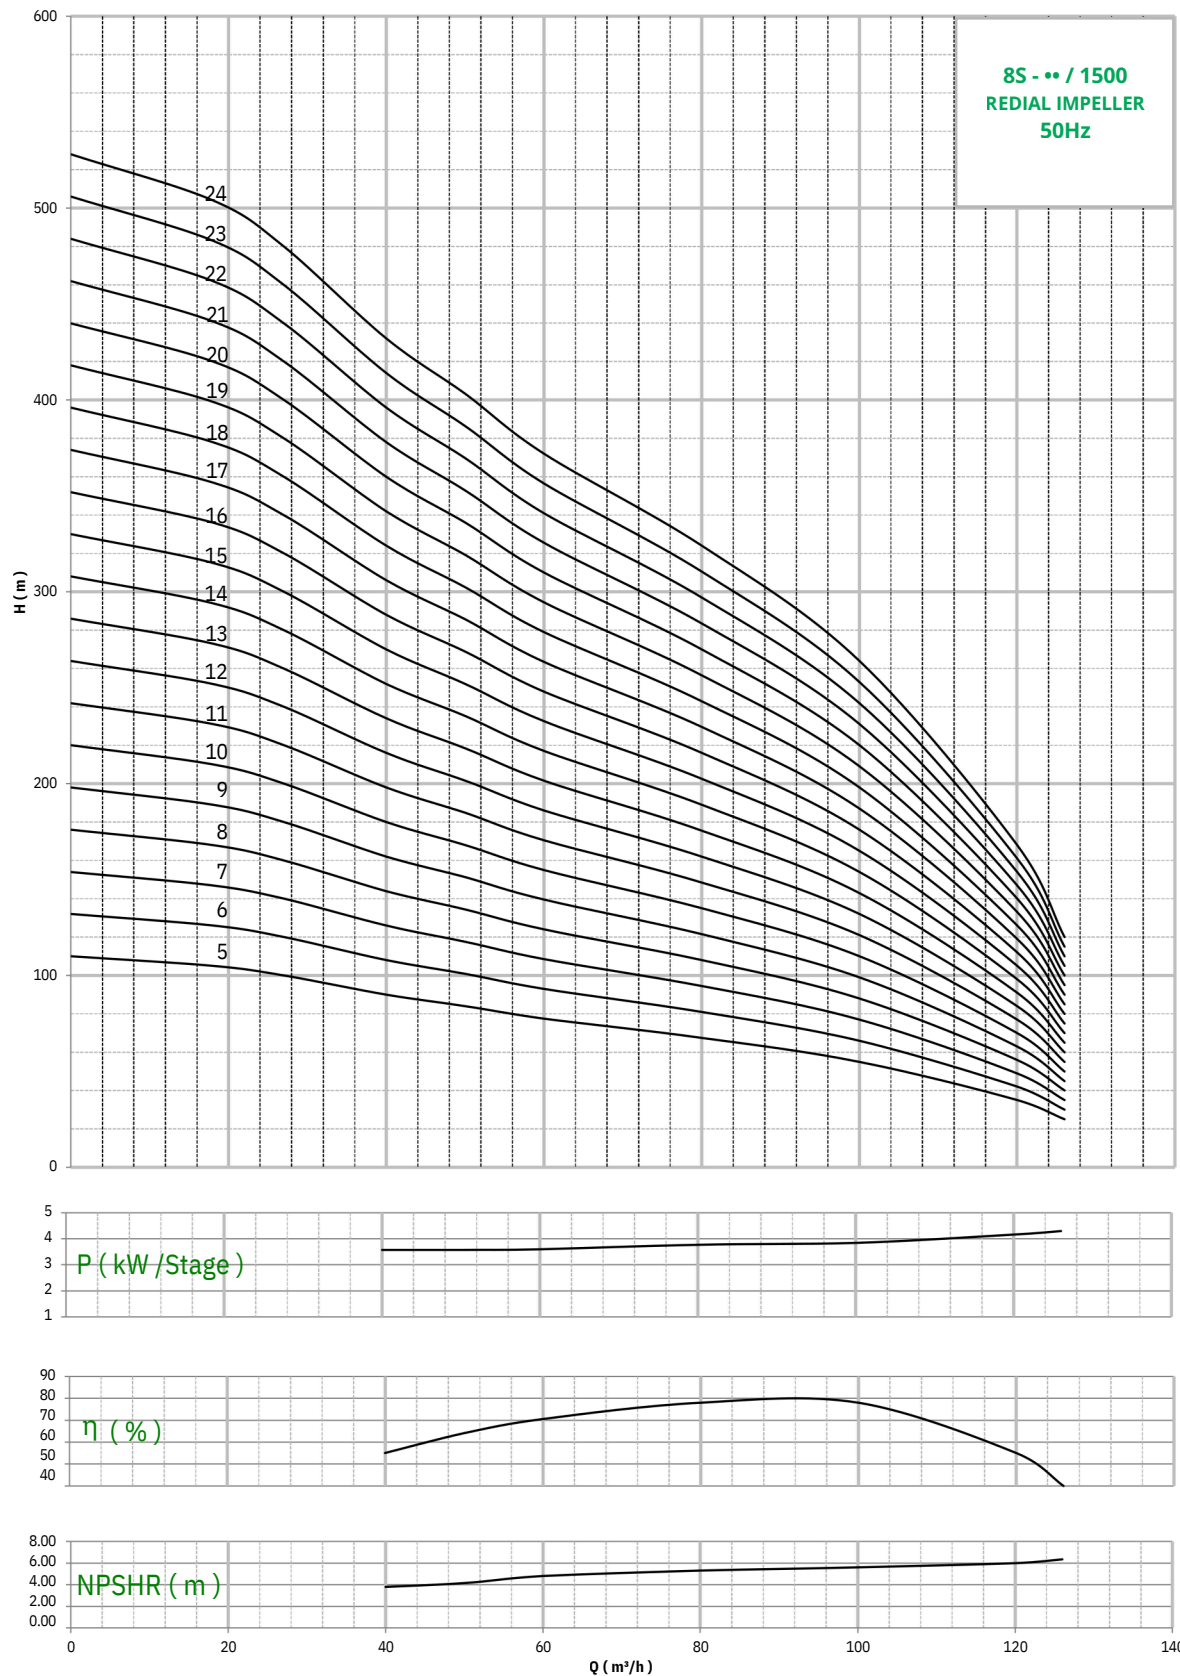

Refer General Information for performance curve conditions and for other details. Curves tolerance according to ISO : 9906, Annex - A

Morsbach Maschinenbau GmbH
Zur Hardt 6, 51597 Morsbach-Überholz, Germany
Tel: +49 2294 599 | Fax: +49 2294 6121

STAINLESS STEEL SUBMERSIBLE PUMPS

Nominal Diameter: **8"**


Nominal Flow: **90m³/h**

Outlet Size: **4"/ 5"**

Flow Range: **60-108m³/h**

Performance Curves : From 5 to 24 Stages

DIMENSIONS & WEIGHT

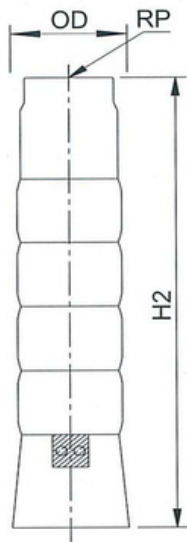

PUMP M ODEL	No. of Stages	REQUIRED MOTOR POWER		DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
		Kw	HP	#OD	RP	H2	
8S-05/1500	5	22	30	195	125	1066	39.5
8S-06/1500	6	26	35	195	125	1194	43.2
8S-07/1500	7	30	40	195	125	1322	46.9
8S-08/1500	8	37	50	195	125	1450	50.6
8S-09/1500	9	37	50	195	125	1578	54.3
8S-10/1500	10	45	60	195	125	1706	58
8S-11/1500	11	55	75	195	125	1834	61.7
8S-12/1500	12	55	75	195	125	1962	65.4
8S-13/1500	13	55	75	195	125	2090	69.1
8S-14/1500	14	63	85	195	125	2218	72.8
8S-15/1500	15	75	100	195	125	2346	76.5
8S-16/1500	16	75	100	195	125	2474	80.2
8S-17/1500	17	75	100	195	125	2602	83.9
8S-18/1500	18	93	125	195	125	2730	87.6
8S-19/1500	19	93	125	195	125	2858	91.3
8S-20/1500	20	93	125	195	125	2986	95
8S-21/1500	21	93	125	195	125	3114	98.7
8S-22/1500	22	110	150	195	125	3242	102.4
8S-23/1500	23	110	150	195	125	3370	106.1
8S-24/1500	24	110	150	195	125	3498	109.8

PUMP MODEL	No. of Stages	M OTOR (Kw)	lps	0	5.00	7.50	11.11	13.89	16.67	22.22	27.78	33.33	35.00
			m ³ /h	0	18	27	40	50	60	80	100	120	126
8S-05/1500	5	22	TOTAL MANOMETRIC HEAD IN METERS - (COLUMN WATER)	110	105	100	90	84	78	68	55	35	25
8S-06/1500	6	26		132	126	120	108	101	93	81	66	42	30
8S-07/1500	7	30		154	147	140	126	118	109	95	77	49	35
8S-08/1500	8	37		176	168	160	144	134	124	108	88	56	40
8S-09/1500	9	37		198	189	180	162	151	140	122	99	63	45
8S-10/1500	10	45		220	210	200	180	168	155	135	110	70	50
8S-11/1500	11	55		242	231	220	198	185	171	149	121	77	55
8S-12/1500	12	55		264	252	240	216	202	186	162	132	84	60
8S-13/1500	13	55		286	273	260	234	218	202	176	143	91	65
8S-14/1500	14	63		308	294	280	252	235	217	189	154	98	70
8S-15/1500	15	75		330	315	300	270	252	233	203	165	105	75
8S-16/1500	16	75		352	336	320	288	269	248	216	176	112	80
8S-17/1500	17	75		374	357	340	306	286	264	230	187	119	85
8S-18/1500	18	93		396	378	360	324	302	279	243	198	126	90
8S-19/1500	19	93		418	399	380	342	319	295	257	209	133	95
8S-20/1500	20	93		440	420	400	360	336	310	270	220	140	100
8S-21/1500	21	93		462	441	420	378	353	326	284	231	147	105
8S-22/1500	22	110		484	462	440	396	370	341	297	242	154	110
8S-23/1500	23	110		506	483	460	414	386	357	311	253	161	115
8S-24/1500	24	110		528	504	480	432	403	372	324	264	168	120